
INCH-POUND
MIL-C-39010/7D
4 January 1994
SUPERSEDING
MIL-C-39010/7C
1 March 1985

MILITARY SPECIFICATION SHEET

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICROMINIATURE (POWDERED IRON CORE), ESTABLISHED RELIABILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39010.

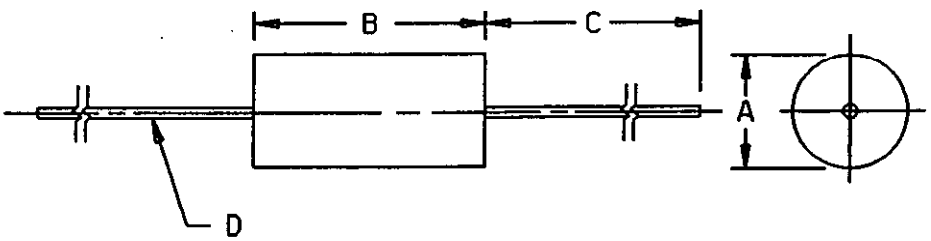

Ltr	Dimensions are in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.146 (3.71)	.166 (4.22)
B	.365 (9.27)	.385 (9.78)
C	1.250 (31.75)	1.626 (41.30)
D	.023 (0.58)	.027 (0.69)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configuration.

(D) denotes changes.

AMSC N/A
FSC 5950

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Material: Iron core.

(D) Weight: 0.03 ounce maximum.

Operating temperature range: -55°C to +105°C.

Dielectric withstanding voltage: Method 301 of MIL-STD-202; test voltage of 1,000 V rms.

Barometric pressure: Method 105, test condition C, of MIL-STD-202; 70,000 feet with a test voltage of 200 V rms.

Electrical characteristics: See tables I and II.

Inductance: See table I.

Inductance tolerance: See table I.

Q values: See table I.

Self-resonant frequency: See table I.

DC resistance: See table I.

Temperature rise: 15°C.

Terminal pull: 5 pounds.

(D) Part or Identifying Number (PIN): M39010/07 (dash number from table I).

(D) Supersession data: This specification supersedes MS14046 dated 16 September 1985.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q minimum	Test frequency (MHz)	Self-resonant frequency minimum (MHz)	DC resistance (25°C) maximum (ohms)	Rated dc current (mA) 2/
A5R1**	5.1	5	45	7.9	60	0.32	495
A5R6**	5.6	5, 10	45	7.9	60	0.32	495
A6R2**	6.2	5	45	7.9	55	0.50	395
A6R8**	6.8	5, 10	50	7.9	55	0.50	395
A7R5**	7.5	5	50	7.9	50	0.60	360
A8R2**	8.2	5, 10	50	7.9	50	0.60	360
A9R1**	9.1	5	50	7.9	45	0.90	290
A100**	10.0	5, 10	55	7.9	45	0.90	290
A110**	11.0	5	55	2.5	42	1.10	265
A120**	12.0	5, 10	65	2.5	42	1.10	265
A130**	13.0	5	65	2.5	40	1.40	240
A150**	15.0	5, 10	65	2.5	40	1.40	240
A160**	16.0	5	65	2.5	34	2.25	185
A180**	18.0	5, 10	75	2.5	34	2.25	185
A200**	20.0	5	75	2.5	30	2.50	175
A220**	22.0	5, 10	75	2.5	30	2.50	175
A240**	24.0	5	60	2.5	25	2.60	170
A270**	27.0	5, 10	60	2.5	25	2.60	170
A300**	30.0	5	60	2.5	19	3.00	165
A330**	33.0	5, 10	65	2.5	19	3.00	165

1/ The complete dash number will include two additional letters (indicated by **). The first additional letter will indicate the inductance tolerance and the second additional letter will indicate the failure rate symbol (e.g., M, P, R, S) and will be added to the end of the dash number.

2/ The rated dc current is based on 90°C ambient temperature with a 15°C rise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.

(D) TABLE II. Electrical characteristics (final). 1/

Inspection group	Allowable variation from initial measurement		Allowable percent from specified minimum value in electrical characteristics (initial) table	
	Inductance (percent)	DC resistance	Self-resonant frequency	Q
Qualification inspection				
Group II	±2	---	---	-10
Group IV	±5	±(3% +.001 ohm)	2/	-10
Group V	±5	±(2% +.001 ohm)	2/	-15
Quality conformance inspection Group B				
Subgroup 1	±5	±(2% +.001 ohm)	2/	-15
Subgroup 3	±2	---	---	-10
Subgroup 4	±5	±(3% +.001 ohm)	2/	-10

1/ Test fixture allowance of +.01 μH shall be added to all change in inductance limits ±(_ percent +.01 μH).

2/ The self-resonant frequency shall be not less than the value specified in table I.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, ME, MI
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 99
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0831-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.