A-A-2345
26 October 1984

COMMERCIAL ITEM DESCRIPTION

WRENCH, OPEN END, ADJUSTABLE

The General Services Administration has authorized the use of this commercial item description in preference to Type I, Class 2 of Federal Specification GGG-W-631

This commercial item description covers adjustable open end wrenches used in plant and machinery maintenance on both hexagonal and squarehead bolts and nuts.

Salient characteristics:


Angle of the opening of the jaws 15 degrees to the longitudinal centerline of the handle.
Designed to allow free movement with a minimum clearance between working parts.
Jaw working surfaces machined smooth. Maximum surface roughness 250 microinches A.A for ground or buffed non-utile surfaces.
Chromium or nickel plate.

Consists of:
Frame - Steel, hardness value of Rockwell C 37-45.
One piece construction, integrally forged centerline to handle shall be straight.
Means provided at wrench end for acceptable assembly of the adjustable jaw(s) and adjustment pin at all appllicable sizes.
Hole provided in the handgrip end of the handle.
Adjustable jaw(s): Forged from steel, hardness value of Rockwell C 37-45.
Machined to engage the frame and accept the adjustment pin at all applicable sizes without binding or excessive play.
Adjustment pin: Steel, hardness value of Rockwell C 37-45. Machined to engage the adjustment holes in the frame without binding or excessive play.
Head of pin hexagon in shape
Opposite end threaded to accept a nut.
Nut: Steel
Hexagonal in shape
Internally threaded to suitably engage the threaded end of the adjustment pin.

Workmanship: Wrenches shall be free from rust, burrs, fins, pits, nodules, or other defects which may impair their serviceability, durability, or appearance. The edges and corners of the wrenches shall be clearly defined and smoothly finished.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.

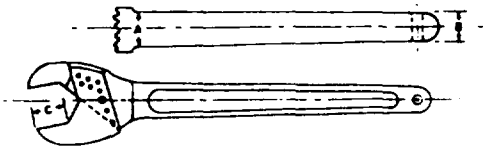

NSN	Size no.	Length, overall		Jaw openings, increments of 1/8 inch	Thickness						Length of jaw face C ±1/32		Test load bending moment minimum
					Head		Handle						
							A		B				
		Minimum	Maximum		Min	Max	Min	Max	Min	Max	Min	Max	
		Inches	Inches	Inches	Inches		Inch		Inch		Inches		Inch-pounds
5120-00-277-6471	1*	23	24 1/2	1-3/8 through 2 7/8, and 1 7/16 through 2 15/16	.810	1.00	.625	.810	.500	.690	1.690	.200	25,000
5120-00-277-6470	2*	34	36	2 3/4 through 4 3/4	1.062	1.250	.690	.940	.500	.810	2.500	2.940	60,000

*Size 1 wrench provided with two adjustable jaws.
*Size 2 wrench provided with one adjustable jaw.

Marking. Wrenches shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture and country of origin may be readily determined.

Regulatory requirement. Contractors/offerors are encouraged to utilize recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Preparing activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.