A-A-50190
January 4, 1989

COMMERCIAL ITEM DESCRIPTION

CABINETS, DELIVERY AND STORAGE, PASTRY; AND TRUCK

DOLLY, PASTRY CABINETS

The General Services Administration has authorized the use of this commercial item description in preference to MIL-C-40617.

1. CLASSIFICATION

1.1 Classification. This commercial item description covers cabinets and dolly trucks of the following types and grades.

a. Cabinets:


Type I - 11 pan
Type II - 40 pan with casters

Grade A - Stainless steel
Grade B - Aluminum

b. Dolly trucks (applicable to type I cabinets only):

Grade A - Stainless steel
Grade B - Aluminum

1.2 Part number. Cabinets and dolly trucks procured under this commercial item description shall be identified in accordance with the following part numbering system:

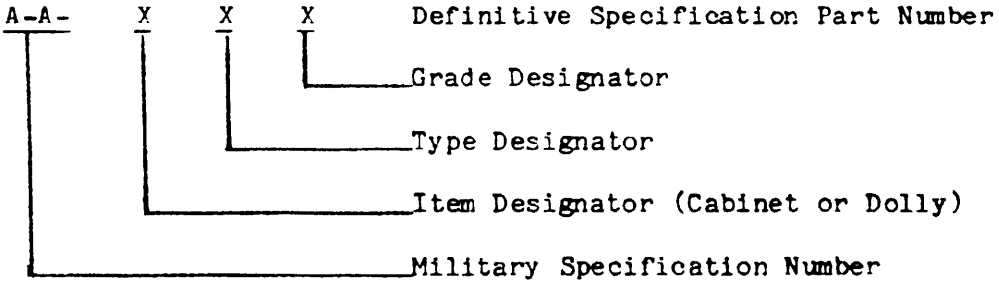

2. SALIENT CHARACTERISTICS

2.1 Design and construction. All cabinets shall be fully enclosed and shall be fabricated from stainless steel or aluminum as specified. Pan runners shall be spaced 1-1/2 inches ± 1/8 inch on centers with maximum of 5/16 inch tipping when pan is withdrawn 2/3 of the way out. Pans shall be supported at the rims or bottoms so that they do not fall through or spill. The cabinets shall have one or two doors which open a minimum of 180°, and shall have

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

provisions for holding the door(s) in the open position. The door(s) shall close tightly against the cabinet. A gravity actuated door latch or a two-point vertical rod latch, actuated by a handle shall be provided for each door. The cabinets shall have either two trunk handles or one full length tubular handle on each side.

2.2 Codes and standards. The cabinets shall comply with the applicable requirements of National Sanitation Foundation Standard No. 2.

2.3 Cabinets.

2.3.1 Type I cabinets. Type I cabinets shall accommodate 11 pans, 18 inches wide by 26 inches long by 1-1/4 inches high. The cabinet dimensions shall not exceed 23 inches high by 22 inches wide by 29 inches deep. The cabinets shall be provided with means for interlocking one cabinet on top of another. When stacked and interlocked, the top cabinet shall not slide off the cabinet underneath. Cabinet handles shall be located 5 ± 1 inches from the top of cabinet. The cabinets when stacked three high on a dolly truck (see 2.4) shall be capable of being dropped from a height of 10 inches onto a concrete floor without any damage to the cabinets.

2.3.2 Type II cabinets. Type II cabinets shall accommodate 40 pans, 18 inches wide by 26 inches long by 1-1/4 inches high. The cabinet dimensions shall not exceed 70 inches high by 22 inches wide by 28 inches deep. Handles shall be 24 to 26 inches above the floor. The cabinet base shall have a tie down loop at front center and rear center locations. The loop opening shall not be less than 7/8 inch, and shall be perpendicular to the base of the cabinet. The loop shall not protrude beyond the cabinet at either end. The cabinets when uniformly loaded with 200 pounds shall be capable of rolling over a 1/8 inch diameter rod at the rate of 3 feet per second without damage to the casters or caster mounting area.

2.4 Dolly truck. The dolly trucks shall be either stainless steel or aluminum as specified and shall only be supplied with type I cabinets when specified. The dolly trucks shall have provisions to preclude cabinets from sliding off the dolly trucks. The dolly truck base shall have a tie down loop at the front center and rear center locations. The loop opening shall not be less than 7/8 and shall be perpendicular to the base of the dolly truck. The loop shall not protrude beyond the dolly truck at either end. The dolly trucks when uniformly loaded with 200 pounds shall be capable of being dropped from a height of 10 inches on to a concrete floor without any damage to the dolly and shall be capable of rolling over a 1/8 inch diameter rod at the rate of 3 feet per second without damage to the casters or caster mounting area.

2.5 Casters. Four casters shall be provided for type II cabinets and dolly trucks. The casters shall be 5-inch swivel casters with the neoprene tires and 1-1/4 tread. Two casters shall be equipped with foot brakes.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:40Z
Check the source to verify that this is the currentversion before use.

2.6 Data name plate (Government unique requirement see 5.4). The cabinets and dolly trucks shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for; (a) Methods of applying, (b) Identification tags, (c) Information not required and (d) Optional marking information shall not apply. The data name plate shall be made of minimum 20-gauge corrosion-resisting metal and attached to the cabinet by rivets, screws, or welding in such a manner as to meet the applicable National Sanitation Foundation sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

National stock number
Procurement instrument identification number
Specification data
Manufacturer's name, address and telephone number
Supplier's name, address and telephone number (list only if different from manufacturer)
Manufacturer's model number
Government approved manual number (see 5.2)

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the item(s).

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and except for those government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same as the product offered for sale in the commercial marketplace. The contractor shall certify the product meets the "Government unique" requirements except when specific quality assurance provisions are specified for the Government unique requirements. In this case, the contractor shall provide data resulting from inspection conducted in accordance with the specified quality assurance. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each cabinet shall be cleaned, preserved, packaged, packed, and unitized in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

4.3 Export packaging. Each cabinet shall be cleaned, preserved, and cushioned to protect against corrosion, deterioration, and physical damage during shippment and storage.

4.3.1 Export packing. Each cabinet shall be packed in a cleated plywood box conforming to type domestic, style optional of PPP-B-601 or a wood cleated fiberboard box conforming to class II of PPP-B-591. Each box shall be closed and strapped in accordance with PPP-B-601 or PPP-B-591. When specified (see 5.2), shipping containers shall be palletized in accordance with MIL-STD-147.

4.4 Marking (commercial and export). Marking of unit pack, shipping container and unit load shall be in accordance with MIL-STD-129.

5. NOTES

5.1 Intended use. The cabinets are intended for the delivery and storage of pastry. The dolly trucks are intended for the transportation of stacked type I cabinets. One dolly truck is normally used with three type I cabinets.

5.2 Ordering data.

a. Title, number, and date of this document.
b. Type and grade of cabinet required (see 1.1).
c. If required, number and grade of dolly trucks for type I cabinets (see 1.1 and 2.4).
d. Government approved manual number to be included on data name plate (see 2.6).
e. Selection of applicable packaging and packing (see 4.1).
f. When palletization is required (see 4.3.1).

5.3 Sources for nongovernment association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging - copies are available from: The American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

National Sanitation Foundation Standard No. 2 - Food Service Equipment and Appurtenances Seal of Approval Listing of Food Service Equipment; copies are available from: The National Sanitation Foundation, 3475 Plymouth Road, P.O. Box 1468, Ann Arbor, MI 48106.

5.4 Government unique requirements. Whenever "(Government unique requirements)" is included in the title of a paragraph under "Salient characteristics" it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD
DLA - GS
Air Force - 84

User Activities

Navy - MC, YD

CIVIL AGENCY COORDINATING ACTIVITY

GSA - FSS

PREPARING ACTIVITY

Army - GL

Project No. 7320-0804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.