INCH-POUND
A-A-59788
June 29, 2006

COMMERCIAL ITEM DESCRIPTION

PATROL CAP, UNIVERSAL CAMOUFLAGE PATTERN

The General Services Administration has authorized the use of the commercial item description for use by the Defense Supply Center, Philadelphia and is available for use by all Federal Agencies.

1. SCOPE. This commercial item description covers the requirements for a visor style patrol cap with inside pocket on crown of cap, intended for wear in all environments by military personnel of the Department of Army.

2. CLASSIFICATION. The cap is one Type in the following sizes:

2.1 Sizes:	6-3/8	7-1/8	7-7/8
	6-1/2	7-1/4	8
	6-5/8	7-3/8	8-1/8
	6-3/4	7-1/2	8-1/4
	6-7/8	7-5/8	8-3/8
	7	7-3/4	8-1/2

3. SALIENT CHARACTERISTICS.

3.1 Description. The cap shall be a visor style, having a circular top crown with a two-piece inner crown lining forming a pocket between lining pieces when stitched, the opening of the pocket shall be at the back of the cap. The cap has a two piece self-lined side crown with a center back and front seam. There is also an alternate one piece crown with a center back seam. The outside band shall be topstitched around the bottom of the side crown. The crown seam shall be reinforced with a bias cut strip of self-fabric between inner and outer plies. The visor shall possess six rows of evenly spaced parallel lock stitching, and the inner edge of the visor shall abut the bottom of the topstitched side crown band. The under visor cover shall overlap the top of the visor 1/4 inch and stitched through all plies and interlining 3/16 to 1/4 inch from the outer edge.

Comments, suggestions, or questions on this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP Standardization Team, 700 Robins Avenue, Philadelphia, PA 19111-5096. Since contact information may change, you may want to verify the currency of this address information using Acquisition Streamlining and Standardization Information System (ASSIST) on-line database at http://assist.daps.dla.mil

AMSC N/A FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

The cap shall be top stitched around the top of the side crown (without catching inner lining), the top and bottom of the under visor cover, and along the center back seam. The cap shall have a piece of loop fastener tape, 5-1/4 inches long by 1 inch wide, placed horizontally on the outside of the band. The loop tape shall be centered on the back band seam.

3.1.1 Seams and stitching. All seams and stitching shall be 10 to 14 stitches per inch except for the stitching through the visor and the stitches for seaming the visor cover together along the inner edge of the visor interlining (not through the interlining) which shall be 6 to 8 stitches per inch. Top stitching shall be performed using a 300 series lockstitch. The stitch gauge (distance between stitch lines) for all topstitching shall be 1/8 to 3/16 inch.

3.2 Material.

3.2.1 Basic material. The cloth shall be water repellent treated, camouflage printed, wind resistant poplin, nylon-cotton blend conforming to MIL-DTL-44436 Class 7.

3.2.2 Cloth, Crown Inner pocket and side piece crown (inner). The cloth for the crown inner pocket and side piece crown shall be basic or ground shade cloth. The ground shade cloth shall be dyed conforming to Desert Sand 500 of 3.2.1 prior to overprinting of the respective Universal Camouflage Pattern. The ground shade shall meet the respective finished fabric's physical, mechanical, and dimensional requirements. Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage printed patterns as specified herein.

3.2.3 Visor interlining. The visor interlining shall be a high density polyethylene material and when tested shall meet the requirements as specified in Table I at the time of extrusion production. The plastic will gain stiffness after cooling. The width of the cap visor shall be in the cross direction offering slight bending properties. It shall not absorb or soften when exposed to water.

3.2.4 Cap interlining. The inside of the center front of the cap shall be stabilized with a square cut piece of natural, plain weave, multifilament polyester or nonwoven interlining made from 100 percent polyester continuous filament fibers that are randomly arranged and bonded at the filament junctions or from a blend of nylon and polyester with a suitable acrylic binder. The stabilizer cloth shall be cut 3 inches wide, and the length shall extend from the top crown joining seam to the visor joining seam. The interlining shall conform to the requirements specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

Table I. Interlining requirements

	Characteristic	Requirement	Test Method
Cap	Fiber content	See paragraph 3.2.3	ASTM D 629 or AATCC 20 A
	Weight oz/sq yd. (min.):		
	Non-woven	3.4	ASTM D 3776, Option C
	Woven	3.3	
Cap	Breaking strength lbs (min.):		
	Non-woven		
	Machine direction	100	
	Cross-machine direction	80	ASTM D 5034
	Woven		
	Warp	190	
	Filling	150	
Visor	Thickness, in. @ 0.125 psi	0.144 – 0.156	ASTM D 1777
	Bending Modulus (in. lbs)	450 - 650	ASTM D 747 1/

1/ Stiffness (bending moment) shall be conducted in accordance with ASTM D-747 except as follows:

a. Unless otherwise specified, the testing conditions shall be in accordance with ASTM D-1776.

b. The test specimen shall be a rectangle of cloth of dimensions two (2) by one (1) inches with the long dimension parallel to the fabric direction under test, warp or filling, as applicable.

c. The load scale reading shall be recorded only at the specimen angular deflection of 60 degrees.

d. The stiffness is the bending moment of specimen at a deflection angle of 60 degrees and shall be calculated to three significant figures as follows:

$$\text{Bending moment, in.-lb.} = \frac{\text{Load scale reading x moment weight*}}{100}$$

* Testing machine of Tinius Olsen Testing Machine Co.

3.2.5 Thread. The thread shall be water repellent treated with a durable water repellent treatment and be a 2-ply, cotton-covered polyester, 35 and 40 Tex for the cap and 65 Tex for quilting the visor. The thread color shall be Foliage Green 504 and conform to the requirements of Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

Table II. Thread requirements

Characteristic	Requirement	Test Method
Colorfastness rating (min.) Laundering Light (40 hrs or 170 kilo-joules)	 3-4 3-4	 AATCC 61, 3A 1/ 2/ AATCC 16, option 1 or 3 1/

1/ AATCC Evaluation Procedure 1, Gray Scale for Color Change

2/ AATCC Evaluation Procedure 2, Gray Scale for Staining

3.2.6 Fastener tape. The fastener tape for placement on the outside band shall be 1 inch nylon conforming to Type II, Class 1 of A-A-55126. Alternate fastener tapes without a selvedge edge are acceptable see 7.3. The color shall be Foliage Green 504.

3.3 Labels. The labels shall be nonwoven and white with black legible marking. It shall show colorfastness to laundering, with a minimum rating of "4" when tested in accordance with AATCC 61, Test No. 4A. The label shall be centered on the top side of the pocket on the inside of the cap, sewn on all four sides. The label shall contain the information on the following format:

PATROL CAP	
Contract Number	S
National Stock Number	I
Fur, Wool or Fiber Products Act Information, as applicable	Z
Contractor Name	E

1. If cap is worn under helmet, helmet headband may require readjustment for proper fit and comfort.
2. Machine wash. Use permanent press cycle. Wash in warm water with mild detergent.
3. Hand wash. Hand wash in warm water using mild detergent. DO NOT WRING OR TWIST. Rinse in clean warm water.
4. DO NOT USE CHORINE BLEACH OR STARCH.
5. Tumble dry at low heat (Do not exceed 130ºF).

3.3.1 Barcode label. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). There shall be a 12 digit Unified Product Code (UPC) number

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

assigned for all NSNs by the contracting activity. The initials “UPC” must appear beneath the code. The bar code for the NSN and the UPC type shall be a medium to high code density and shall be located so that it causes no damage to the item. This UPC code must also be placed on all shipping cartons on which the NSN appears.

3.4 Figures. Figures are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.5 Sizes and measurements. The finished caps shall conform to the measurements specified in Tables III and I V.

Table III. Cap sizes (inches)

Size	Inside cap circumference (± 1/4 inch tolerance)
6-3/8	20-1/8
6-1/2	20-1/2
6-5/8	20-7/8
6-3/4	21-1/4
6-7/8	21-5/8
7	22
7-1/8	22-3/8
7-1/4	22-3/4
7-3/8	23-1/8
7-1/2	23-1/2
7-5/8	23-7/8
7-3/4	24-1/4
7-7/8	24-5/8
8	25
8-1/8	25-3/8
8-1/4	25-3/4
8-3/8	26-1/8
8-1/2	26-1/2

Table IV. Cap measurements (inches)

	A	B	C	D	E
Tolerance	3-1/2 ± 1/4	1 ± 1/8	3-3/8 ± 1/4	2-3/8 ± 1/4	2-1/8 ± 1/8

NOTE: Reference Figure 1 for A, B, C, D and E measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.6 Patterns. A set of standard patterns to be used to cut working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements. The standard patterns provide a seam allowance of 3/8 inch for the joining seams, and 1/4 inch for all other seams. The outer band pattern may be cut on warp or filling.

3.6.1 List of pattern parts. The components of the cap shall be cut from the materials specified and according to the number of parts listed in Table IV.

Table V. List of pattern parts

Material	Pattern Nomenclature	Cut parts
Basic material	Crown	1
	Crown lining	1
	Outerband	1
	Under visor cover	1
	Under visor cover (alternate)	1
	Top visor cover (alternate)	1
	Top visor cover	1
	Side piece crown	4
	Side piece crown (alternate) 1/	2
	Crown inner (pocket)	1
Visor interlining	Plastic	1

1/ When using the alternate side piece crown the alternate under visor and top visor pieces must be used.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acqusition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The item offered, or generic equivalent, must have been sold to commercial market or the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

5.3 Visual examination. Each cap shall be examined for the defects listed below.

5.3.1 Defects. Any hole, cut, or tear; any visible mend; thread ends not removed; component part omitted, misplaced, or not as required; component part puckered, wrinkled, or pleated; fullness affecting appearance; misshaped or distorted; part of material caught in unrelated operation or stitching; not neatly seamed; back or front seam off center; skipped stitches or runoff stitches; ends of stitching not secured; loose or tight tension; thread breaks; loop fastener tape misplaced or not serving intended purpose, missing or cut length more or less than specified; visor off center or construction not formed evenly; visor interlining caught in visor to cap joining seam; top ends of side crown band not evenly matched in back closing seam; label missing, incorrect, or illegible; any dimensional measurement of item not as specified; bar code omitted or not readable by scanner; human readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5.4 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order.

7. NOTES.

7.1 Source of Government Documents:

7.1.1 Copies of military and Federal documents are available online at http://assist.daps.dla.mil/quicksearch or http://assist.daps.mil or from the Standardization Documents Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

7.2 Source of non-Government documents.

7.2.1 ASTM Standards are available online at www.astm.org or from ASTM INTERNATIONAL, 100 Barr harbor Drive, West Conshohocken, PA 19428-2959.

7.2.3 AATCC Standards are available online at www.aatcc.org or from the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709-2215.

7.3 YKK Cosmolon Edge to Edge or Velcro “DD”, edge to edge loop tape have been found acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

7.4 For access to standard samples, address the contracting activity issuing the invitation for bids or request for proposal. Standard samples are also available at DSCP through http://warfighter.dla.mil under tab “Vendor Info” then “Specifications/Pattern Request” under “Special Instructions” provide color shade, roll number and solicitation/contract number.

7.5 Ordering data. The contract or order should specify the following:

a. CID document number and revision
b. Size requirements (see 2.1)
c. Product conformance provisions (see 5.1)
d. Packaging requirements (see 6.0)
e. Acceptance criteria (see 5.4)

7.6 Key words.
Headwear
Water repellent
Hat

MILITARY INTERESTS:
Custodian:

Army –GL


CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FSS

Preparing Activity:
DLA – CT

Project Number 8415-2005-001

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

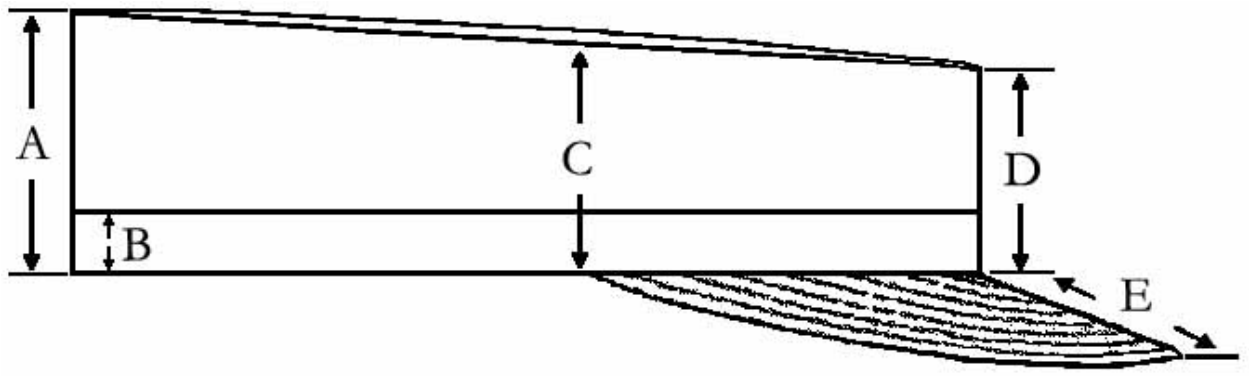

	A	B	C	D	E
	3-1/2	1	3-3/8	2-3/8	2-1/8
Tolerance	± 1/4	± 1/8	± 1/4	± 1/4	± 1/8

Figure 1. Patrol Cap Measurements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.