INCH-POUND
A-A-59788A
April 6, 2017
SUPERSEDING
A-A-59788
June 29, 2006

COMMERCIAL ITEM DESCRIPTION

PATROL CAP

The General Services Administration has authorized the use of the commercial item description for use by DLA Troop Support and is available for use by all Federal Agencies.

1. SCOPE. This commercial item description covers the requirements for a visor style patrol cap with inside pocket on crown of cap, intended for wear in all environments by military personnel of the Department of Army.

2. CLASSIFICATION. The cap is one (1) Type in the following Classes and Sizes:

2.1 Classes:

Class 1. Universal Camouflage Pattern (UCP)
Class 2. Operation Enduring Freedom Camouflage Pattern (OEF-CP)
Class 3. Operational Camouflage Pattern (OCP)

2.2 Sizes:

6-3/8	7-1/8	7-7/8
6-1/2	7-1/4	8
6-5/8	7-3/8	8-1/8
6-3/4	7-1/2	8-1/4
6-7/8	7-5/8	8-3/8
7	7-3/4	8-1/2

Comments, suggestions, or questions on this document should be addressed: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, you may want to verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil/.

AMSC N/A FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The cap shall be a visor style, having a circular top crown with a two-piece inner crown lining forming a pocket between lining pieces. When stitched, the opening of the pocket shall be at the back of the cap. The pocket hem shall be double turned and stitched with a straight stitch. The cap has a two-piece self-lined side crown with center back and front seams (Option 1). There are also two (2) optional one-piece side crown configurations: a mock center front seam and center back seam (Option 2) and a center back seam only (Option 3). The under visor cover shall overlap the top visor cover by approximately 1/4-inch. The outer band shall be topstitched around the bottom of the side crown. The crown seam shall be reinforced with a bias cut strip of self-fabric between inner and outer plies. The visor shall possess six (6) rows of evenly spaced parallel lock stitching, and the inner edge of the visor shall abut the bottom of the topstitched side crown band. The cap shall be topstitched around the top of the side crown (without catching inner lining), the top and bottom of the under visor cover, and along the center back seam. The cap shall have a piece of loop fastener tape, 5-1/4-inches long by 1-inch wide, placed horizontally on the outside of the band. The loop tape shall be centered on the back band seam, and shall be stitched on all four (4) sides 1/16 to 1/8-inch from edges.

3.1.1 Seams and stitching. All seams and stitching shall be 10 to 14 stitches per inch except for the stitching through the visor and the stitches for seaming the visor cover together along the inner edge of the visor interlining (not through the interlining) which shall be 6 to 8 stitches per inch. When attaching the crown to side crown, 300 or 100 series stitch may be used. Top stitching shall be performed using a 300 series lockstitch. The top stitching on the overlap section of the under visor and top visor covers shall be through all components 3/16 to 1/4-inch from outer edge. The stitch gage for all topstitching shall be 1/8 to 3/16-inch. The mock center front seam for the one-piece side crown, Option 2, shall be stitched with a 1/4-inch seam allowance (± 1/16) inch from folded center front edge, turn seam to right (as worn), and topstitched 1/8 to 3/16-inch from center front seam.

3.2 Color.

3.2.1 Color matching. The color and appearance of the cloths, caps and components for all classes shall match the applicable standard sample (see 7.4) when viewed using the AATCC Evaluation Procedure 9, Option A, with sources simulating artificial daylight D75 illuminant with a color temperature of 7500K (± 200) illumination of 100 (±20) foot candles, and shall be a good match to the standard sample under incandescent A illuminant with a color temperature of 2856K (± 200).

3.3 Material.

3.3.1 Basic material. The cloth shall be water repellent treated, camouflage printed, wind resistant poplin, nylon-cotton blend. The Class 1 cap shall be Universal Camouflage Pattern (UCP) conforming to MIL-DTL-44436 Class 7. The Class 2 cap shall be Operation Enduring Freedom Camouflage Pattern (OEF-CP) conforming to MIL-DTL-44436 Class 10. The Class 3 cap shall be Operational Camouflage Pattern (OCP) conforming to MIL-DTL-44436 Class 13 unless otherwise specified in the contract or solicitation as specified (see 7.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.3.2 Cloth, Crown inner pocket and side liner. The cloth for the crown inner pocket and side liner shall be basic material, printed seconds or ground shade cloth. The ground shade cloth for Class 1 shall be dyed conforming to Desert Sand 500 of 3.2.1 prior to overprinting of the respective UCP. The ground shade cloth for Class 2 shall be dyed conforming to Cream 524 of 3.2.1 prior to overprinting of the respective OEF-CP. The ground shade cloth for Class 3 shall be dyed conforming to Dark Cream 559 of 3.2.1 prior to overprinting of the respective OCP. Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage printed patterns as specified herein. The ground shade and printed seconds material shall meet the physical, mechanical, and dimensional requirements of the basic material. Cloth for the crown inner pocket and side liner are not required to be water repellent.

3.3.3 Visor interlining. The visor interlining shall be a plastic high density polyethylene material weighing 12.0 to 14.5 grams per visor, having a thickness of 0.083 to 0.089-inch, and 40 to 60 percent stiffness when tested in accordance with the requirements in Table I. It shall not absorb or soften when exposed to water (see 7.6).

3.3.4 Cap interlining. The inside of the center front of the cap shall be stabilized with a square cut piece of natural, plain weave, multifilament polyester or nonwoven interlining made from 100 percent polyester continuous filament fibers that are randomly arranged and bonded at the filament junctions or from a blend of nylon and polyester with a suitable acrylic binder. The stabilizer cloth shall be cut 3-inches wide, and the length shall extend from the top crown joining seam to the visor joining seam. The interlining shall conform to the requirements specified in Table I.

THIS SECTION IS INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE I. Interlining requirements.

	Characteristic	Requirement Reference	Test Method
Visor	Thickness, inch Weight, grams Stiffness, percent	0.083 to 0.089 12.0 to 14.5 40 to 60	ASTM D4801 ASTM D5261 ASTM D747
Cap	Fiber content	3.3.4	ASTM D629 or AATCC 20A
	Weight oz/sq yd. Non-woven Woven	 3.4 (±0.2) 3.3 (±0.2)	 ASTM D3776/D3776M, Option C
	Breaking strength (pounds) (minimum) Non-woven Machine direction Cross-machine direction Woven Warp Filling	 100 80 190 150	ASTM D5034

3.3.5 Thread. The thread shall be water repellent treated with a durable water repellent treatment and be a 2-ply, cotton-covered polyester, 31-35 and 36-45 Tex for the cap and 61-70 Tex for quilting the visor. The thread color shall be Foliage Green 504 for Class 1 and Tan 499 for Classes 2 and 3. All Classes shall conform to the requirements of Table II.

TABLE II. Thread requirements.

Characteristic	Requirement	Test Method
Colorfastness rating (minimum) Laundering (after 3 cycles) Light (40 AFU or 170 kJ/(m^{2}nm) @ 420 nm) 3/	 3-4 3-4	 AATCC 61, 3A 1/ 2/ AATCC 16.2 or 16.3 1/

1/ AATCC Evaluation Procedure 1, Gray Scale for Color Change
2/ AATCC Evaluation Procedure 2, Gray Scale for Staining
3/ AATCC Fading Units (AFU)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.3.6 Fastener tape. The loop fastener tape on the outside band shall be 1-inch wide nylon conforming to Type II, Class 1 of A-A-55126. Alternate loop fastener tapes with a non-selvage edge are acceptable (see 7.5). The color shall be Foliage Green 504 for the Class 1, and Tan 499 for Classes 2 and 3.

3.4 Labels. The labels shall be nonwoven and white with black legible marking. It shall show colorfastness to laundering, with a minimum rating of "4" when tested in accordance with AATCC 61, Test No. 4A. The label shall be centered on the pocket on the inside of the cap, sewn on all four (4) sides. The label shall contain the information on the following format:

PATROL CAP	
Contract Number	S
National Stock Number (NSN)	I
Fur, Wool or Fiber Products Act Information, as applicable	Z
Contractor Name	E

1. If cap is worn under helmet, helmet head band may require readjustment for proper fit and comfort.
2. Hand or machine wash using permanent press cycle, cold water and mild detergent without chlorine bleach.
3. DO NOT RING OR TWIST. Rinse in clean, cold water.
4. Tumble dry at low heat (do not exceed 130ºF) or hang dry.

CAUTION
DO NOT USE CHLORINE BLEACH OR STARCH - WILL DAMAGE THE CAP
DO NOT REMOVE THIS LABEL

3.4.1 Barcode label. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit National Stock Number (NSN). There shall be a 12 digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The bar code for the NSN and the UPC type shall be a medium to high code density and shall be located so that it causes no damage to the item. This UPC code must also be placed on all shipping cartons on which the NSN appears.

3.5 Figures. Figures are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.6 Sizes and measurements. The finished caps shall conform to the measurements specified in Tables III and IV when measured as specified in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE III. Inside cap circumference (inches).

Size	Measurement (± 1/4) inch tolerance) 1/
6-3/8	20-1/8
6-1/2	20-1/2
6-5/8	20-7/8
6-3/4	21-1/4
6-7/8	21-5/8
7	22
7-1/8	22-3/8
7-1/4	22-3/4
7-3/8	23-1/8
7-1/2	23-1/2
7-5/8	23-7/8
7-3/4	24-1/4
7-7/8	24-5/8
8	25
8-1/8	25-3/8
8-1/4	25-3/4
8-3/8	26-1/8
8-1/2	26-1/2

1/ When taking the inside cap circumference begin at the center back seam measuring along the inside of the side liner at the bottom edge, across the inside edge of the visor finishing at the center back seam.

TABLE IV. Cap measurements (inches).

Location	A	B	C	D	E
Measurement	3-1/2	1	3-3/8	2-3/8	2-1/8
Tolerance	(±1/4)	(±1/8)	(±1/4)	(±1/4)	(±1/8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE V. Method of measuring.

Location	Method
A	Measure at center back seam, perpendicular to edge, from bottom of cap to the crown joining seam.
B	Measure width of band, perpendicular to edge, from bottom of cap to top of band.
C	Measure at junction of visor and band, perpendicular to edge, from bottom of band to crown joining seam.
D	Measure at center front of cap from bottom of band perpendicular to visor, to crown joining seam.
E	Measure at center front, perpendicular to band, from bottom of band to front edge of visor.

3.7 Patterns. A set of standard patterns to be used to cut working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on working patterns and clipping seam allowance along visor inner edge (section attached to the side crown) is permitted to facilitate assembly. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements. The standard patterns provide a seam allowance of 3/8-inch for the joining seams and 1/4-inch on visor outer seam. The outer band pattern may be cut on warp or filling.

3.7.1 List of pattern parts. The components of the cap shall be cut from the materials specified and according to the number of parts listed in Table VI.

THIS SECTION IS INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE VI. List of pattern parts.

Material	Pattern Nomenclature	Pattern Abbreviation	Cut parts
Basic material	Crown	A_A_59788-CROWN	2
	Crown pocket	A_A_59788-CRW-PKT	1
	Side option 1 (side crown)	A_A_59788-SD-OPT1	2
	Side option 2 (side crown)	A_A_59788-SD-OPT2	1
	Side option 3 (side crown)	A_A_59788-SD-OPT3	1
	Side liner	A_A_59788-SD-LINER	1
	Top visor cover	A_A_59788-TOP-VSR-CV 1/	1
	Under visor cover	A_A_59788-UND-VSR-CV 1/	1
	Outerband	A_A_59788-OUTERBAND	1
Visor interlining	Plastic	A_A_59788-PLASTIC	1

1/ Refer to paragraph 3.7 Patterns for guidance on clipping inner visor seam allowance.

3.8 Toxicity. The finished patrol cap shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 5.4. Chemicals recognized by the Environmental Protection Agency (EPA) as human carcinogens shall not be used.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The item offered, or generic equivalent, must have been sold to commercial market or the Government.

5.3 Visual examination. Each cap shall be examined for the defects listed below.

5.3.1 Defects. Any hole, cut, or tear; any visible mend; thread ends not removed; component part omitted, component cut on bias, misplaced, or not as required; component part puckered, wrinkled, or pleated; fullness affecting appearance; misshaped or distorted; part of material caught in unrelated operation or stitching; not neatly seamed; back or front seam off center; rows of stitching at visor not parallel; skipped stitches or runoff stitches; ends of stitching not secured; loose or tight tension; stitching on top and bottom of visor not finishing smooth; side crown and crown joining seam rollover along circumference is distorted, pulling frontward or backward; thread breaks; loop fastener tape misplaced or not serving intended purpose, missing, or cut length more or less than specified; visor off center or construction not formed evenly; visor interlining

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

caught in visor to cap joining seam; visor interlining material pulling through or visible on outside of cap, either on the top or bottom; top ends of side crown band not evenly matched in back closing seam; label missing, incorrect, or illegible; any dimensional measurement of item not as specified; bar code omitted or not readable by scanner; human readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5.4 Toxicity test. When required (see 7.7), an acute dermal irritation study and a skin sensitization study shall be conducted on laboratory animals. When the results of the studies indicate the patrol cap is not a sensitizer or irritant, a Repeat Insult Patch Test shall be performed in accordance with Modified Draize Procedure (see 3.8). If the toxicity requirement (see) can be demonstrated with historical use data, toxicity testing may not be required (see 7.7).

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order.

7. NOTES.

7.1 Source of Government Documents:

7.1.1 Copies of military and Federal documents are available online at http://quicksearch.dla.mil.

7.2 Source of non-Government documents.

7.2.1 ASTM Standards are available for purchase online at http://www.astm.org.

7.2.2 AATCC Standards are available for purchase online at http://www.aatcc.org.

7.2.3 Repeat Insult Patch Test: - Modified Draize Procedure –
Principles and Methods of Toxicology, A Wallace Hayes (editor).

(Copies are available on-line at http://www.taylorandfrancis.com/ or https://www.crcpress.com)

7.3 Intended use. The Patrol Cap is intended for wear in all environments by military personnel of the Department of Army.

7.4 Standard sample. For access to samples and pattern drawings, address the contracting activity issuing the invitation for bids or request for proposal.

7.5 Velcro “DD”, edge to edge loop tape have been found acceptable.

7.6 Visor interlining. Carr Textile visor board, style 463B2 has been found acceptable for this material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

7.7 Ordering data. The contract or order should specify the following:


a. Title, number and date of this Commercial Item Description (CID)
b. Camouflage Pattern (Class) and Size required (see 2.1)
c. Basic material required (see 3.3.1)
d. When toxicity testing is required (see 3.8, 5.4)
e. Product conformance provisions (see 5.1)
f. Acceptance criteria (see 5.5)
g. Packaging requirements (see 6)

7.8 Key words.

Hat
Headwear
Operational Camouflage Pattern (OCP)
Operation Enduring Freedom Camouflage Pattern (OEF-CP)
Water repellent
Universal Camouflage Pattern (UCP)

THIS SECTION IS INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

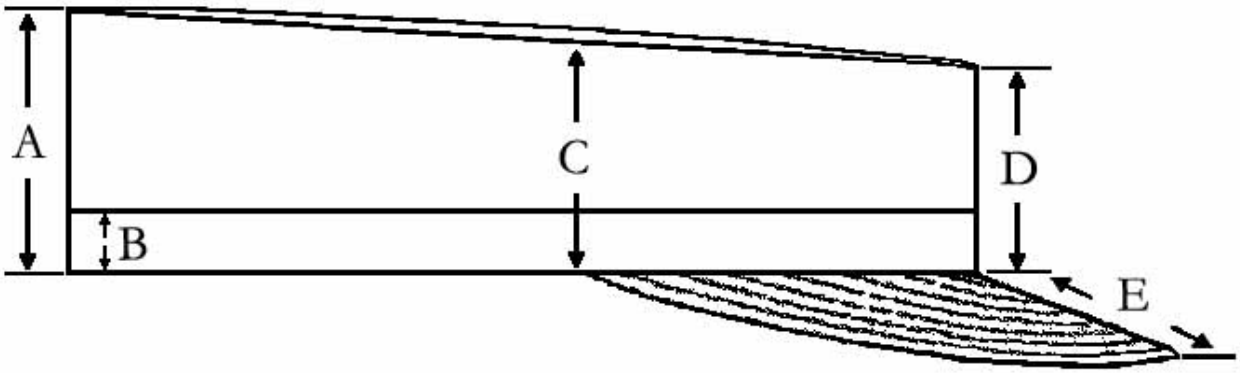

	A	B	C	D	E
	3-1/2	1	3-3/8	2-3/8	2-1/8
Tolerance	± 1/4	± 1/8	± 1/4	± 1/4	± 1/8

FIGURE 1. Patrol cap measurements.

MILITARY INTERESTS:

Custodian:
Army –GL

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FSS

Preparing Activity: DLA – CT

(Project 8415-2017-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.