INCH-POUND

A-A-59788B
July 22, 2024
SUPERSEDING
A-A-59788A
April 6, 2017

COMMERCIAL ITEM DESCRIPTION

CAP, PATROL

The General Services Administration has authorized the use of this Commercial Item Description (CID) by all federal agencies.

1. SCOPE. This commercial item description covers the requirements for a visor style patrol cap with inside pocket on crown and is intended for wear in all environments by military personnel of the Department of Army.

2. CLASSIFICATION. The cap shall be of one (1) type in the following sizes:

2.1 Classes. DELETED

Schedule of sizes

6-3/8	7-1/8	7-7/8
6-1/2	7-1/4	8
6-5/8	7-3/8	8-1/8
6-3/4	7-1/2	8-1/4
6-7/8	7-5/8	8-3/8
7	7-3/4	8-1/2

Beneficial comments, recommendations, additions, deletions, clarifications, and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A: Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The cap shall be a visor style, having a circular top crown with a two (2)-piece inner crown lining forming a pocket between lining pieces. When stitched, the opening of the pocket shall be at the back of the cap. The pocket hem shall be double turned and stitched with a straight stitch. The cap has a two (2) piece self-lined side crown with center back and front seams (Option 1). There are also two (2) optional one-piece side crown configurations: a mock center front seam and center back seam (Option 2) and a center back seam only (Option 3). The under visor cover shall overlap the top visor cover by approximately 1/4-inch. The outer band shall be topstitched around the bottom of the side crown. The crown seam shall be reinforced with a bias cut strip of self-fabric between inner and outer plies. The visor shall possess six (6) rows of evenly spaced parallel lock stitching, and the inner edge of the visor shall abut the bottom of the topstitched side crown band. The cap shall be topstitched around the top of the side crown (without catching innerlining), the top and bottom of the under-visor cover, and along the center back seam. The cap shall have a piece of loop fastener tape, 5-1/4 inches long by 1-inch wide, placed horizontally on the outside of the band. The loop tape shall be centered on the back band seam and shall be stitched on all four (4) sides 1/16 to 1/8-inch from edges.

3.2 Materials.

3.2.1 Basic material. The cloth shall be water repellent treated, camouflage printed, wind resistant poplin, nylon-cotton blend conforming to Class 13 of MIL-DTL-44436.

3.2.2 Color. The color shall be Operational Camouflage Pattern (OCP) or as specified in the contract or purchase order. The finished cloth shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.4).

3.2.2.1 Visual shade matching. The color and appearance of the patrol cap shall match the standard sample when viewed using the AATCC EP 9, Option C, (see 7.4.1) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature of 6500 (± 200) Kelvin (K) illumination of 100 (± 20) foot candles. Alternatively, the color and appearance of the patrol cap shall match the standard sample with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500K (± 200) illumination of 100 (± 20) foot candles in lieu of D65. (See 7.4.2). The patrol cap shall also be a good match to the standard sample with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856K (± 200). DD1222's shall reflect which light source is used. If the light source is not indicated on the DD1222, D65 will be assumed by the Government Shade Laboratory.

3.2.3 Crown inner pocket and side liner material. The cloth for the crown inner pocket and side liner shall be the basic material, printed seconds or ground shade cloth. The ground shade cloth shall be dyed conforming to Dark Cream 559 of 3.2.1 prior to overprinting of the respective OCP. Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage printed patterns as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

The ground shade and printed seconds cloth shall meet the physical, mechanical, and dimensional requirements of the basic material. Cloth for the crown inner pocket and side liner shall not be water repellent treated.

3.3 Interlinings.

3.3.1 Cap interlining. The inside of the center front of the cap shall be stabilized with a square cutpiece of natural, plain weave, multifilament polyester or nonwoven interlining made from 100 percent polyester continuous filament fibers that are randomly arranged and bonded at the filament junctions or from a blend of nylon and polyester with a suitable acrylic binder. The stabilizer cloth shall be cut 3-inches wide, and the length shall extend from the top crown joining seam to the visor joining seam. The interlining shall conform to the requirements specified in Table I.

3.3.2 Visor interlining. The visor interlining shall be a plastic high density polyethylene material weighing 12.0 to 14.5 grams per visor, having a thickness of 0.083 to 0.089-inch, and 40 to 60 percent stiffness when tested in accordance with the requirements in Table I. It shall not absorb or soften when exposed to water (see 7.6).

TABLE I. Interlining requirements.

Interlining	Characteristic	Requirement	Test Method
Cap	Fiber content	See 3.2	AATCC TM20A
	Weight oz/ yd^2. (min.) Nonwoven Woven	 3.4 3.3	 ASTM D3776/D3776M, Option C
	Breaking strength, (pounds) (min.) Nonwoven Machine direction Cross-machine direction Woven Warp Filling	 100 80 190 150	 ASTM D5034
Visor	Weight, grams Thickness, inch Stiffness, percent	See 3.2.2	ASTM D5261 ASTM D4801 ASTM D790

3.4 Thread. The thread shall be cotton-covered polyester water repellent treated with a durable water repellent treatment, Tex size 31-35 and 36-45 for the cap and 61-70 for quilting the visor, 2-ply conforming to Type II of A-A-50199. The color shall be Tan 499.

3.4.1 Seams and stitching. All seams and stitching shall conform to ASTM D6193. All seams shall have 10-14 stitches per inch except the stitching through the visor and the stitches for seaming the visor cover together along the inner edge of the visor interlining (not through the interlining) shall have 6-8 stitches per inch. When attaching the crown to side crown, 300 or 100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

series stitch may be used. Top-stitching shall be performed using a 300 series lockstitch. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, pleats or open seams occur. Thread tensions shall be maintained so that there will be no loose stitching resulting in loos bobbin or top thread or excessively tight stitching resulting in pucker of the materials sewn. The topstitching on the overlap section of the under visor and top visor covers shall be through all components 3/16 to 1/4-inch from outer edge. The stitch gage for all topstitching shall be 1/8 to 3/16-inch. The mock centerfront seam for the one-piece side crown, Option 2, shall be stitched with a 1/4 (± 1/16) inch seam allowance from folded center front edge, turn seam to right (as worn), and topstitched 1/8 to 3/16-inch from center front seam.

3.4.1.1 Type 301 stitching. All joining seams shall use a type 301 stitching. Ends of all stitches shall be backstitched or overstitched not less than 1/4-inch except where ends are turned under or caught in other seams or stitches. Ends of a continuous line of stitching shall be backtacked or overstitched not less than 1/2-inch. The lock shall be imbedded in the materials sewn.

3.4.1.2 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2-inch back of the end of the stitching. 1/

b. Thread breaks or two (2) or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2-inch in back of the defective areas, continue over the defective area and continue a minimum of 1/2-inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5 Fastener tape. The loop fastener tape on the outside band shall be 1-inch wide nylon conforming to Type II, Class 1 of A-A-55126. Alternate loop fastener tapes with a non-selvage edge are acceptable (see 7.6.1). The color shall be Tan 499.

3.6 Combination identification, size and instruction label. Each cap shall have an identification, size and instruction label in accordance with Type VI, Class 14 of MIL-DTL-32075. The label shall be centered on the pocket on the inside of the cap, sewn on all four (4) sides. The label shall contain the information in the following format:

THIS SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

PATROL CAP	
Contract Number	S
National Stock Number (NSN)	I
Fur, Wool or Fiber Products Act Information, as applicable	Z
Contractor Name	E

1. If cap is worn under helmet, helmet head band may require readjustment for proper fit and comfort.
2. Hand or machine wash using permanent press cycle, cold water and mild detergent without chlorine bleach.
3. DO NOT RING OR TWIST. Rinse in clean, cold water.
4. Tumble dry at low heat (do not exceed 130ºF) or hang dry.

CAUTION:
DO NOT USE CHLORINE BLEACH OR STARCH - WILL DAMAGE THE CAP
DO NOT REMOVE THIS LABEL

3.6.1 Barcode hang tag. Each cap shall have a barcode label/hangtag conforming to Type VIII, Class 17 of MIL-DTL-32075. The bar coding element shall be a 13-digit National Stock Number (NSN). There shall be a 12-digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be located so that it is completely visible on the cap when it is folded and/or packaged as specified and so it causes no damage to the cap.

3.7 Patterns. A set of standard patterns to be used to cut working patterns shall be furnished by the Government. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on working patterns and clipping seam allowance along visor inner edge (section attached to the side crown) is permitted to facilitate assembly. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements. The standard patterns provide a seam allowance of 3/8-inch for the joining seams and 1/4-inch on visor outer seam. The outer band pattern may be cut on warp or filling. The components of the cap shall be cut from the materials specified; and according to the number of parts listed in Table II.

THIS SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts.

Material	Pattern Nomenclature	Pattern Abbreviation	Cut parts
Basic material	Crown	A_A_59788-CROWN	2
	Crown pocket	A_A_59788-CRW-PKT	1
	Side option 1 (side crown)	A_A_59788-SD-OPT1	2
	Side option 2 (side crown)	A_A_59788-SD-OPT2	1
	Side option 3 (side crown)	A_A_59788-SD-OPT3	1
	Side liner	A_A_59788-SD-LINER	1
	Top visor cover	A_A_59788-TOP-VSR-CV 1/	1
	Under visor cover	A_A_59788-UND-VSR-CV 1/	1
	Outerband	A_A_59788-OUTERBAND	1
Visor interlining	Plastic	A_A_59788-PLASTIC	1

1/ Refer to paragraph 3.7 for guidance on clipping inner visor seam allowance.

3.8 Sizes and measurements. The finished caps shall conform to the measurements specified in Tables III and IV when measured as specified in Table V.

TABLE III. Inside cap circumference (inches).

Size	Measurement (± 1/4) inch tolerance 1/
6-3/8	20-1/8
6-1/2	20-1/2
6-5/8	20-7/8
6-3/4	21-1/4
6-7/8	21-5/8
7	22
7-1/8	22-3/8
7-1/4	22-3/4
7-3/8	23-1/8
7-1/2	23-1/2
7-5/8	23-7/8
7-3/4	24-1/4
7-7/8	24-5/8
8	25
8-1/8	25-3/8
8-1/4	25-3/4
8-3/8	26-1/8
8-1/2	26-1/2

1/ When taking the inside cap circumference begin at the center back seam measuring along the inside of the side liner at the bottom edge, across the inside edge of the visor finishing at the center back seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE IV. Cap measurements (inches).

Location 1/	A	B	C	D	E
Measurement	3-1/2	1	3-3/8	2-3/8	2-1/8
Tolerance	(±1/4)	(±1/8)	(±1/4)	(±1/4)	(±1/8)

1/ See Figure 1 below for locations and instructions on how to measure.

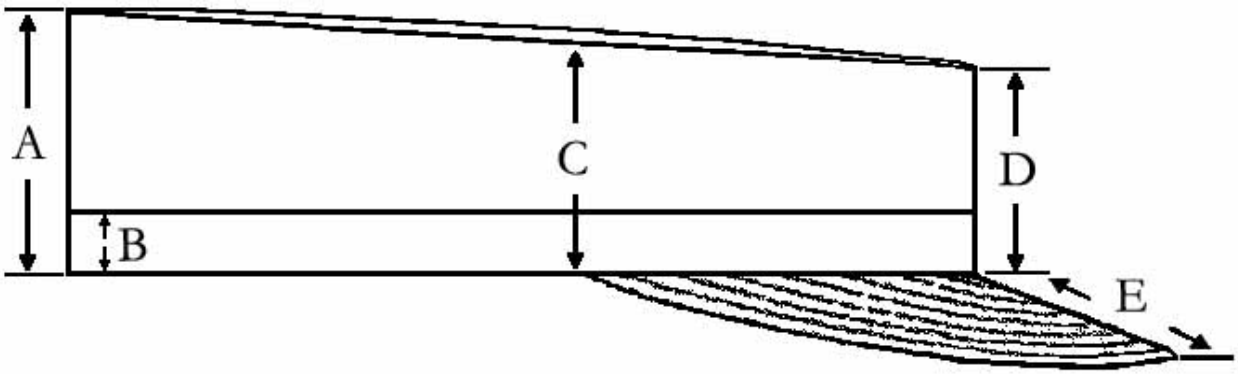


FIGURE 1. Patrol cap methods of measuring.

Location	Method
A	Measure at center back seam, perpendicular to edge, from bottom of cap to the crown joining seam.
B	Measure width of band, perpendicular to edge, from bottom of cap to top of band.
C	Measure at junction of visor and band, perpendicular to edge, from bottom of band to crown joining seam.
D	Measure at center front of cap from bottom of band perpendicular to visor, to crown joining seam.
E	Measure at center front, perpendicular to band, from bottom of band to front edge of visor.

3.9 Toxicity. Unless otherwise specified in the contract or procurement documents, the finished patrol cap shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.9.1.

3.9.1 Toxicity test. When the toxicity requirement (see 3.9) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required. (See 7.1.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. The finished patrol cap shall conform to the quality of the product established in this document. The patrol cap shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13693; as applicable. (see 7.1.2 and 7.1.3).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The patrol cap shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished patrol cap offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.3).

5.4 Visual examination. Each finished patrol cap shall be examined for the defects listed in Table V as defined in ASTM D3990. The lot size shall be expressed in units of patrol caps. The sample unit shall be one (1) patrol cap.

TABLE V. Visual examination defects.

Material defects: Any hole, cut, tear, permanent fold, pleat, or crease; any spot or stain on outside, discoloration or color not as specified, any outwardly visible part shaded, any serious material defects or objectionable odor.
Stitches, seams and stitching: Loose or tight stitching tension, broken or skipped stitches, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; distorted, open, pulled or snagged stitches, twisted, ragged or inconsistent edge.
Workmanship: Any component part omitted, twisted, not specified size, missing, misplaced or distorted parts; poorly shaped, any dimension of item not as specified; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels: Label(s) missing, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or procurement documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

5.5 Dimensional examination. The finished patrol cap shall conform to the dimensions specified in Tables III and IV. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) patrol cap.

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents (see 7.6).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or order (see 7.7).

7. NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA and EO 13693 information is available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.4 Toxicity testing. If dermal toxicity testing is required, conduct in accordance with Title 40 of the Code of Federal Regulations, current editions and applicable sections, which are consistent with OECD tests:

Skin Sensitization 406 and Dermal Irritation 404
(https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).
Dermal sensitization: https://www.law.cornell.edu/cfr/text/40/798.4100
Dermal toxicity: https://www.law.cornell.edu/cfr/text/40/798.2250.

7.2 Source of non-Government documents.

7.2.1 AATCC Test Methods are available for purchase online at https://aatcc.org.

7.2.2 ASTM Standards are available for purchase online at https://www.astm.org.

7.2.3 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://asq.org.

7.3 Intended use. The patrol cap is intended for wear in all environments by military personnel of the Department of Army.

7.4 Standard sample. For access to samples and pattern drawings, address the contracting activity issuing the invitation for bids or request for proposal.

7.4.1 Visual shade matching. In 2017, Option A of AATCC EP9 was changed to Option C. NOTE: In case of confusion, the viewing geometry should be “The specimen plane and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.4.2 In 2022, the U.S. Military (All Services) accepted D65 as the new preferred light source for visual shade matching due to the supply chain issues with D75.

7.5 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.6 Acceptable materials.

7.6.1 YKK Cosmolon Edge to Edge or Velcro "DD", edge to edge loop tape have been found acceptable.

7.6.2 Carr Textile visor board, style 463B2 has been found acceptable for this material.

7.7 Ordering data. The contract or order should specify the following:

a. Title, number and date of this commercial item description.
b. Class and sizes required (see 2.)
c. Color required (see 3.1.2).
d. When toxicity testing is required (see 3.8).
e. Product conformance (see 5.1).
f. Acceptance criteria (see 5.6).
g. Packaging requirements (see 6.).

7.8 National Stock Number (NSNs). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with the CID and are provided for reference only.

NSNs	**Color**	**Size**
8415-01-630-8905	OCP	6-3/8
8415-01-630-8913	OCP	6-1/2
8415-01-630-8915	OCP	6-5/8
8415-01-630-8925	OCP	6-3/4
8415-01-630-8926	OCP	6-7/8
8415-01-630-8931	OCP	7
8415-01-630-8932	OCP	7-1/8
8415-01-630-8933	OCP	7-1/4
8415-01-630-8934	OCP	7-3/8
8415-01-630-8935	OCP	7-1/2
8415-01-630-8936	OCP	7-5/8
8415-01-630-8937	OCP	7-3/4
8415-01-630-8939	OCP	7-7/8
8415-01-630-8940	OCP	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

7.9 Key words.

Hat
Headwear
Operational Camouflage Pattern (OCP)
Water repellent

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Custodian:
Army –GL
Navy-NU
Air Force – 11

Preparing Activity:
DLA-CT

(Project 8415-2024-010)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currencyof the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.