[INCH–POUND]
A–A–59789
26 March 2006


COMMERCIAL ITEM DESCRIPTION

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 5 PIECE, FOR COLD PLATE APPLICATIONS, GENERAL REQUIREMENTS FOR

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for a family of 5 piece wedge card holders for holding circuit card assemblies into their installed positions when used in heat sinking devices (cold plates, heat exchanger) or other applications. Card holders covered by this CID are intended to provide maximum contact between thermal paths on the circuit card assemblies and the heat sink surfaces and to provide increased resistance to loosening due to shock and vibration. Requirements for specific card holders are covered in the individual CID specification sheets. Card holders covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

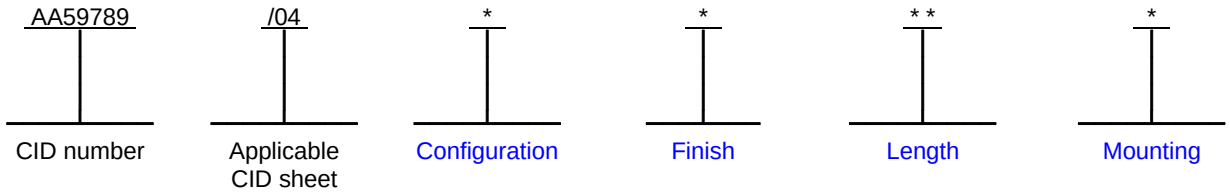

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Card holders supplied to this CID shall be as specified on the applicable CID specification sheet.

3.2 CID specification sheet. The family of card holders for use on circuit card assemblies shall be in accordance with the requirements specified herein and the applicable CID specification sheet. In the event of conflict between this general CID and the applicable CID specification sheet, the latter shall govern.

3.3 Material. Materials shall be as specified herein and on the applicable CID specification sheet.

3.3.1 Body and wedges. The body and wedge material shall be aluminum alloy 6061 temper T6 in accordance with ASTM B221, SAE AMS–QQ–A–200/8, or equivalent.

3.3.2 Captive nut (when applicable). The captive nut material shall stainless steel in accordance with ASTM A582/A582M or equivalent.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC–VAC, Post Office Box 3990, Columbus, OH 43218–3990, facsimile (614) 693–1642, or electronic mail at 5998.Documents@dscc.dla.mil. Since contact information can change, you may want to verify the currency of the address information using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.3.3 Cup. The cup material for visual indicators shall stainless steel in accordance with ASTM A240/A240M, ASTM A582/A582M, or equivalent.

3.3.4 Flat washer. The flat washer shall comply with AIA/NAS NAS 620 or equivalent.

3.3.6 Lockwasher. The lockwasher shall comply with AIA/NAS NASM35338, AIA/NAS NAS 1676, or equivalent.

3.3.7 Screw. The screw material shall be stainless steel in accordance with SAE AMS–QQ–S–763, ASTM A484/A484M, ASTM A582/A582M, or equivalent.

3.3.8 Screw retention lock nut (when applicable). When screw retention is specified, the lock nut used shall comply with AIA/NAS NASM21043 or equivalent.

3.3.9 Spring, . The spring material for visual indicators shall be stainless steel in accordance with ASTM A313/A313M, ASTM A580/A580M, or equivalent.

3.3.10 Alignment springs. The alignment spring (when needed) shall be either beryllium copper in accordance with ASTM B194, or stainless steel in accordance with SAE AMS 5904, or equivalent.

3.4 Configurations. Card holders are available with many options that determine its configurations. The individual options of a particular card holder are specified on the applicable CID specification sheet. Listed below is a compilation of the most popular options.

3.4.1 Lockwasher and flat washer. A lockwasher and flat washer located under the screw head will provide for additional resistance to loosening from shock and vibration. Unless otherwise inherent to the design of the card holder, on those where a lockwasher and flat washer are an option, a configuration identifier shall be included in the PIN.

3.4.2 Screw self–locking element. The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock vibration. Unless otherwise specified, the self-locking element shall comply with MIL–DTL–18240 or equivalent. Card holders requiring a screw self-locking element shall include a configuration identifier in the PIN.

3.4.3 Facing (left or right). Some card holders require a facing suffix to denote their unique orientation when properly installed on a circuit card assembly. These card holders are available for mounting in either the left hand or right hand position. Unless otherwise specified, left facing card holders shall include a configuration identifier “L” in the PIN. Unless otherwise specified, right facing card holders shall include a configuration identifier “R” in the PIN.

3.5 Finish.

3.5.1 Stainless steel parts (when applicable). Stainless steel parts shall be subjected to passivation treatment in accordance with SAE AMS 2700, MIL–S–5002, or equivalent.

3.5.2 Beryllium copper parts (when applicable). Beryllium copper parts shall be finished in accordance with SAE AMS–QQ–N–290, Class 1, Grade G, Bright or equivalent.

3.5.3 Aluminum parts. Unless otherwise specified, all aluminum parts shall be finished as specified in 3.5.3.1 through 3.5.3.7, inclusive. Finish designators shall be as specified in table I and on the applicable CID specification sheet or equivalent. A finish designator shall be included in the PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE I. Card holder finishes for aluminum parts and PIN designators.

Finish designator	Finish	Reference document (or equivalent)	Paragraph
C	Chemical film	MIL–C–5541, Class 1A	3.5.3.1
B	Anodize, black	MIL–A–8625, Type II, Class 2	3.5.3.2
Q	Anodize, black, with dry film lubricant	MIL–A–8625, Type I or II, Class 2 and MIL–PRF–46010 (for dry film lubricant)	3.5.3.3
H	Anodize, hard black	MIL–A–8625, Type III, Class 2	3.5.3.4
D	Anodize, hard black, with dry film lubricant	MIL–A–8625, Type III, Class 2 and MIL–PRF–46010 (for dry film lubricant)	3.5.3.5
E	Nickel, electroless	SAE AMS–C–26074, Grade B, Class 4	3.5.3.6
N	Nickel, electrodeposited	SAE AMS–QQ–N–290, Class 1, Grade G, Bright	3.5.3.7

3.5.3.1 Chemical film. Chemical film finish provides corrosion prevention on aluminum and aluminum alloys. Chemical film finish shall be in accordance with MIL–C–5541, Class 1A or equivalent. Chemical film finish assemblies shall include a finish designator "C" in the PIN.

3.5.3.2 Black anodized. Black anodized finish provides good surface corrosion protection and medium abrasion resistance. Black anodize finish shall be in accordance with MIL–A–8625, Type II, Class 2 or equivalent. Black anodized finish assemblies shall include a finish designator "B" in the PIN.

3.5.3.3 Black anodized with dry film lubricant. Dry film lubricant applied over black anodize is for the reduction of wear and friction. Black anodize finish shall be in accordance with MIL–A–8625, Type I or Type II, Class 2 or equivalent. Dry film lubricant shall be in accordance with MIL–PRF–46010, Type I or equivalent. Black anodized with dry film lubricant finish assemblies shall include a finish designator "Q" in the PIN.

3.5.3.4 Hard black anodized. Hard black anodized finish provides excellent surface corrosion and abrasion resistance under severe service conditions. Hard black anodize finish shall be in accordance with MIL–A–8625, Type III, Class 2 or equivalent. Hard black anodized finish assemblies shall include a finish designator "H" in the PIN.

3.5.3.5 Hard black anodized with dry film lubricant. Dry film lubricant applied over hard black anodize is for the reduction of wear and friction. Hard black anodize finish shall be in accordance with MIL–A–8625, Type III, Class 2 or equivalent. Dry film lubricant shall be in accordance with MIL–PRF–46010 or equivalent. Hard black anodized with dry film lubricant finish assemblies shall include a finish designator "D" in the PIN.

3.5.3.6 Nickel, electroless. Electroless nickel finish provides a hard and smooth surface and protects aluminum and aluminum alloys from corrosion, oxidation and wear. Electroless nickel finish shall be in accordance with SAE AMS–C–26074, Grade B, Class 4 or equivalent. Electroless nickel finish assemblies shall include a finish designator "E" in the PIN.

3.5.3.7 Nickel, electrodeposited. Electrodeposited nickel finish protects metals against corrosive attack in rural, industrial, and marine atmospheres and offers high hardness for wear and low friction. Electrodeposited nickel finish shall be in accordance with SAE AMS–QQ–N–290, Class 1, Grade G, Bright or equivalent. Electrodeposited nickel finish assemblies shall include a finish designator "N" in the PIN.

3.6 Interface and physical dimensions. The card holders shall be as specified herein and the applicable CID specification sheet.

3.6.1 Expanded and relaxed dimensions. Expanded and relaxed dimensions shall be as specified in the applicable CID specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.6.2 Card holder length. Unless otherwise specified, the card holders length shall be the length of the body and wedge assembly in its relaxed state. The lengths available for a particular card holder shall be listed on the applicable CID specification sheet. Card holders length designator shall be included in the PIN. See table II for primary length designators for card holders 10 inches or greater in length. Examples of length designation (13th and 14th characters of PIN) are underlined below:

2.30 inch (58.4 mm) card holder = AA59789/01BN23W;

7.60 inch (193.0 mm) card holder = AA59789/02BN76W;

11.50 inch (292.1 mm) card holder = AA59789/03BNB5W.

TABLE II. Primary length designators for card holders 10 inches (254 mm) or longer.

PIN designation	Primary length, inches	PIN designation	Primary length, inches
A	10 (254 mm)	E	14 (356 mm)
B	11 (279 mm)	F	15 (381 mm)
C	12 (305 mm)	G	16 (406 mm)
D	13 (330 mm)	H	17 (431 mm)

3.6.3 Mounting options. The mounting options shall be as specified in 3.6.3.1 through 3.6.3.5, inclusive. Mounting option designators shall be included in the PIN (see table III). When mounting holes are required, the number of holes and their location on the card holder mounting body shall be as specified on the applicable CID specification sheet.

TABLE III. Mounting hole options and PIN designators.

PIN designation	Hole description	Number of holes
N	No holes (for adhesive mounting)	0
R	Rivet mount holes; counterbore and countersunk through holes	2 or more
T	Tapped 0–80 UNF 2B holes	2 or more
S	Tapped 2–56 UNC 2B holes	2 or more
V	Tapped 4–40 UNC 2B holes	2 or more
U	Tapped, metric M2 x 0.4 holes	2 or more
M	Tapped, metric M2.5 x 0.45 holes	2 or more
Y	Tapped, metric M3 x 0.5 holes	2 or more
P	Index pins	2 or more

3.6.3.1 No mounting holes. No mounting holes option is intended to be used when card holders are to be mounted with adhesives. Card holders not having mounting holes shall include a mounting designator "N" in the PIN (see table III).

3.6.3.2 Rivet mounting holes (counterbore and countersunk through holes). The holes used for rivet mounting shall be of the diameter, countersunk angle, depth, and counterbore diameter (when applicable) specified on the applicable CID specification sheet. Card holders using rivet mount holes shall include a mounting designator "R" in the PIN (see table III).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.6.3.2.1 Rivet dimensions. The rivet styles typically used when rivet mounting holes is specified are depicted on figure 1.

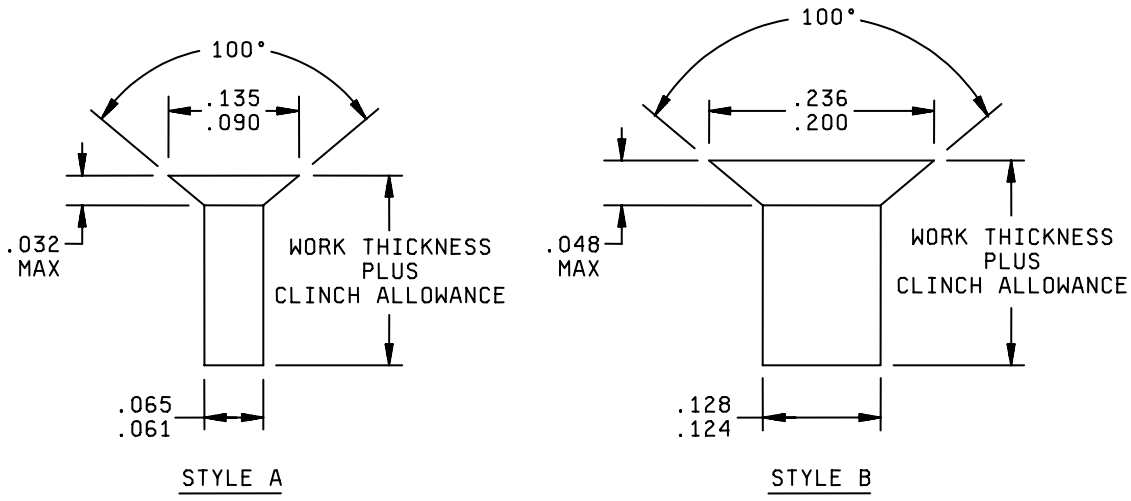


FIGURE 1. Suggested rivet dimensions.

3.6.3.3 Tapped holes. Tapped holes shall be 0–80 UNF, 2–56 UNC, or 4–40 UNC through holes. Card holders using tapped holes shall include a mounting designator "T, “S”, or “V”, respectively in the PIN (see table III).

3.6.3.4 Tapped holes, metric. Metric tapped holes shall be 2 mm x 0.4 mm (.08 x .016), 2.5 mm x 0.45 mm (.098 x .018), or 3 mm x 0.5 mm (.12 x .019) through holes. Card holders using metric tapped holes shall include a mounting designator "K", “M”, or “L”, respectively in the PIN (see table III).

3.6.3.5 Index pins. Index pins details shall be specified on the applicable CID specification sheet. Card holders using index pins shall include a mounting designator "P" in the PIN (see table III).

3.6.4 Screw. Unless otherwise specified on the applicable CID specification sheet, the screw shall have a internal hex socket head for tool engagement and shall turn clockwise to secure the card holder and circuit card assembly into its installed position.

3.6.5 Cold plate slot width dimension. Recommended slot width dimension (see figure 2) will be specified on the applicable CID specification sheet.

3.6.6 Nominal installation torque. When card holders are used in cold plate applications as depicted on figure 2, the nominal installation torque of each card holder shall be as specified on the CID specification sheet.

3.6.7 Disassembly. Unless otherwise specified by the CID specification sheet, card holders shall have the capability of being disassembled before or after mounting.

3.7 Marking. Card holders supplied to this CID can be marked with the manufacturer’s standard commercial PIN when applicable. The PIN marked on the unit pack shall be the CID PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

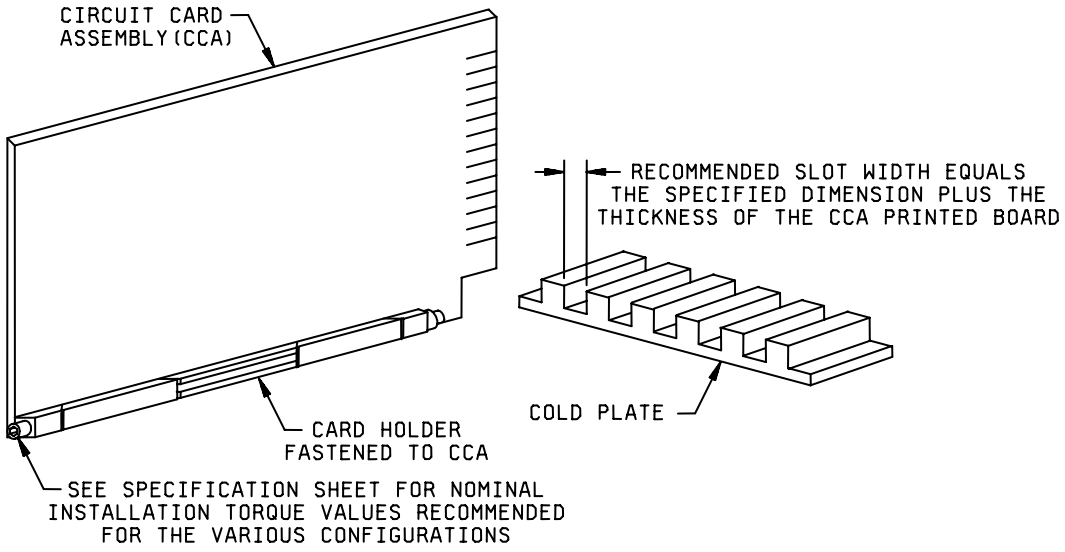


FIGURE 2. Cold plate slot width details.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, quality assurances practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID.

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 12 months.

b. The company producing the item must have sold 500 units meeting the requirements of this CID in the commercial marketplace over the past 12 months.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these card holders to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

7.3 Source of documents.

Department of Defense

MIL–S–5002	–	Surface Treatments and Inorganic Coatings for Metal Surfaces of Weapon Systems.
MIL–C–5541	–	Chemical Conversion Coatings On Aluminum And Aluminum Alloys.
MIL–A–8625	–	Anodic Coatings For Aluminum And Aluminum Alloys.
MIL–DTL–18240	–	Fastener Element, Self-Locking, Threaded Fastener, 250°F Maximum.
MIL–PRF–46010	–	Lubricant, Solid Film, Heat Cured, Corrosion Inhibiting.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Other Publications

AEROSPACE INDUSTRIES ASSOCIATION (AIA)

AIA/NAS NAS 620	–	Washer, Flat - Reduced Outside Diameter.
AIA/NAS NAS 1676	–	Washer, Lock-Spring, Helical, Hi-Collar.
AIA/NAS NASM35338	–	Washer, Lock-Spring, Helical, Regular (Medium) Series.
AIA/NAS NASM21043	–	Nut, Self-Locking, 800°F, Reduced Hexagon, Reduced Height, Ring Base, Corrosion Resistant Steel.

(Application for copies should be addressed to the Aerospace Industries Association, 1250 Eye Street, NW, Suite 1200, Washington, DC 20005–3924 or at URL: http://www.aia-aerospace.org/)

ASTM INTERNATIONAL (ASTM)

ASTM A240/A240M	–	Standard Specification for Chromium and Chromium–Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
ASTM A313/A313M	–	Standard Specification for Stainless Steel Spring Wire.
ASTM A484/A484M	–	Standard Specification for General Requirements for Stainless Steel Bars, Billets, and Forgings.
ASTM A580/A580M	–	Standard Specification for Stainless Steel Wire.
ASTM A582/A582M	–	Standard Specification for Free–Machining Stainless Steel Bars.
ASTM B194	–	Standard Specification for Copper-Beryllium Alloy Plate, Sheet, Strip, and Rolled Bar.
ASTM B221	–	Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes.

(Application for copies should be addressed to the ASTM International, PO Box C700, 100 Barr Harbor Drive, West Coshohocken, PA 19428-2959 or at URL: http://www.astm.org/)

SAE INTERNATIONAL (SAE)

SAE AMS–QQ–A–200/8	–	Aluminum Alloy 6061, Bar, Rod, Shapes, Tube, and Wire, Extruded.
SAE AMS–QQ–N–290	–	Nickel Plating (Electrodeposited).
SAE AMS–QQ–S–763	–	Steel Bars, Wire, Shapes, and Forgings, Corrosion Resistant.
SAE AMS–C–26074	–	Electroless Nickel Coatings.
SAE AMS 2700	–	Passivation of Corrosion-Resistant Steels.
SAE AMS 5904	–	Steel, Corrosion Resistant, Sheet and Strip 18Cr - 9.0Ni (SAE 30302) Cold Rolled, 1/2 Hard, 150 ksi (1034 MPa) Tensile Strength-UNS S30200.

(Application for copies should be addressed to the SAE World Headquaters, 400 Commonwealth Drive, Warrendale, PA 15096-0001 or at URL: http://www.sae.org/)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.5 Government users. To acquire information on obtaining these card holders from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC–CAC, Post Office Box 3990, Columbus, OH 43218–3990, DSN 850–7402 or (614) 692–7402, or via electronic mail at ActiveDevices.CAC@dscc.dla.mil.

7.6 Assistance. Questions or comments pertaining to this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC–VAC, Post Office Box 3990, Columbus, OH 43218–3990; telephone (614) 692–0526; DSN 850–0526; facsimile (614) 693–1642; or electronic mail address 5998.Documents@dscc.dla.mil. This document is available for downloading at World Wide Web URL http://www.dscc.dla.mil.

7.7 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs. Table IV lists the Environmental Protection Agency (EPA) top seventeen hazardous materials targeted for major usage reduction. If any of these hazardous materials are required, it is recommended that it be used only when other materials cannot meet performance requirements.

Table IV. EPA top seventeen hazardous materials.

Benzene	Dichloromethane	Tetrachloroethylene
Cadmium and compounds	Lead and compounds	Toluene
Carbon Tetrachloride	Mercury and compounds	1,1,1 – Trichloroethane
Chloroform	Methyl Ethyl Ketone	Trichloroethylene
Chromium and compounds	Methyl Isobutyl Ketone	Xylenes
Cyanide and compounds	Nickel and compounds	

7.7.1 Guidance on use of alternative parts with less hazardous or non–hazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS

Preparing Activity

DLA – CC

Project 5998–2006–007

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.