INCH-POUND

A–A–59789/12
4 May 2007


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 5 PIECE, FOR COLD PLATE APPLICATIONS, .375 X .375 INCH BODY SIZE, WITH TWO MOUNTING HOLES AND VISUAL LOCK INDICATION, SCREW ACTUATED

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring 5 piece card holders described herein shall consist of this document and the latest issue in effect of A–A–59789.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

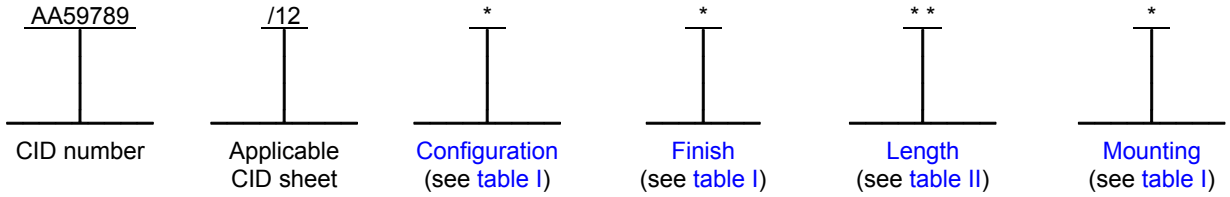

Example: AA59789/12AB60S is the PIN for a black anodized with dry film lubricant finished, 6.0 inches (121.9 mm) long card holder. The card holder also features two tapped mounting holes for use with 2–56 UNC 2B fasteners and has visual lock indication.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card firmly in place providing high resistance to shock and vibration while providing maximum thermal transfer.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A–A–59789.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59789.

Actuating screw hex drive socket. The across flats dimension for hex drive socket shall be .140 inch (3.60 mm) for mounting options “R”, “S”, and “V” and .118 inch (3.0 mm) for mounting option “Y”.

Cold plate slot width. The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .425 inch (10.80 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59789).


Installation torque. The recommended nominal installation torque is as follows: 16 inch-pounds (1.8 N-m) for assemblies of configuration “A” and “F” and 20 inch-pounds (2.3 N-m) for assemblies of configurations “J” and “N”.

Configuration. The configuration of a card holders shall be as specified in table I. The details of a particular configuration consist of those on figures 1 and 2, and may include those on figures 3 or 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE I. Configurations.

Configuration	Applicable figures	Hardware options
A	1	No added options
F	1 and 2	Lockwasher and flat washer
N	1 and 3	Screw self-locking element
J	1, 2, and 3	Lockwasher, flat washer, and screw self-locking element

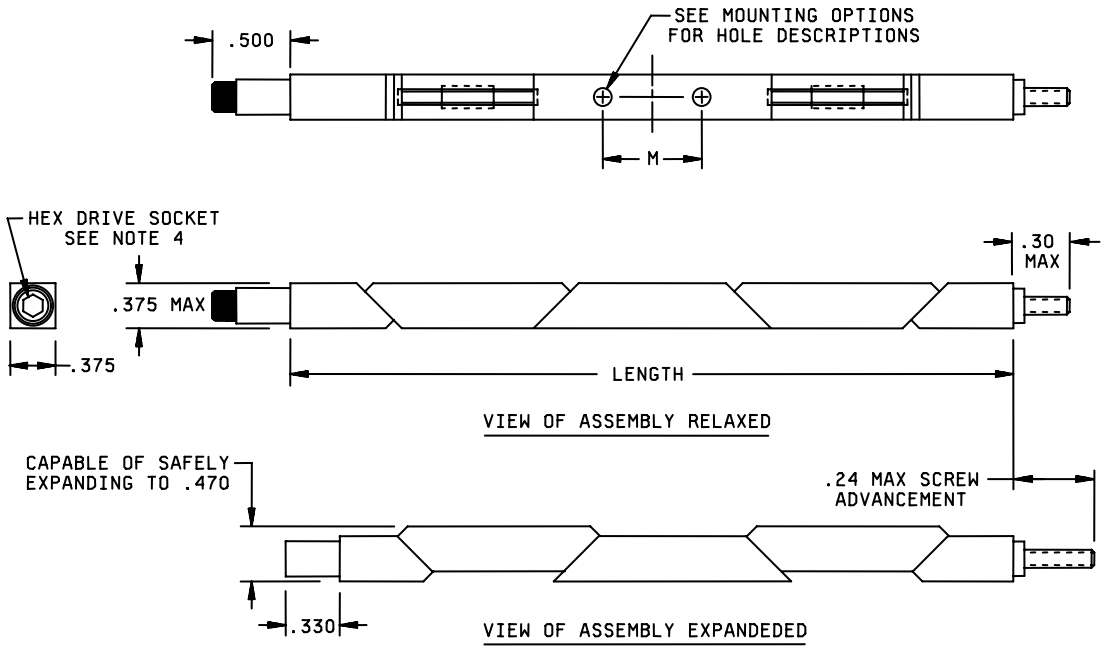

Inches	mm	Inches	mm	Inches	mm
.24	6.1	.330	8.38	.470	11.94
.30	7.6	.375	9.26	.500	12.7

NOTES:
1. Dimensions are in inches. Millimeters are given for information only.
2. Unless otherwise specified, tolerances are for ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Configuration shown uses captive nut on rear wedge. Alternate design using threaded insert shall be acceptable.
4. The across flats dimension for actuating screw hex drive socket shall be .140 inch (3.60 mm) or .118 inch (3.0 mm) for the corresponding mounting option (see hex drive socket details).

FIGURE 1. Relaxed and expanded dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Visual lock indicator (see figure 2). Card holders shall have a visual indicator to show when the card holder is in its relaxed (unlocked) state. When the card holder is in the relaxed (unlocked) state, the end of the actuating screw shall display a red band on the side of the screw. When the actuating screw on the card holder has been tightened so that the assembly is in the expanded (locked) position, this red band shall be concealed.

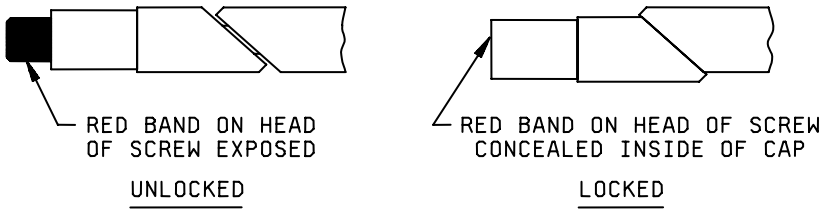


FIGURE 2. Visual lock indicator.

Finish. The finish designator shall be as specified in A–A–59789. The finishes available for this CID specification sheet are as follows: “B” (black anodize), “P” (electrodeposited nickel), “H” (hard black anodize), or “D” (hard black anodize with dry film lubricant).

Length, expanded, and relaxed dimensions. The length designator shall be as specified in A–A–59789. The lengths available for this CID specification sheet are listed in table II. The length, expanded, and relaxed dimensions shall be as specified on figure 1.

TABLE II. Additional assembly dimensions (see figure 1). 1/

PIN length designator	Dimension “Length” ±.02 (0.5)	Dimension “M” ±.01 (0.3)
50	4.80 (121.9)	1.00 (25.4)
55	5.30 (134.6)	1.00 (25.4)
60	5.80 (147.3)	1.00 (25.4)
65	6.30 (160.0)	1.00 (25.4)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Mounting. Mounting designators “R” (rivet mount using countersunk holes), “S” (tapped 2-56 holes), “V” (tapped 4-40 holes), or “Y” (tapped metric M3 x 0.5 holes) shall be as specified in A–A–59789. See figure 1 for mounting hole spacing requirements. Card holders using mounting option “R” may be shipped unassembled.

Rivet mount holes. The holes used for rivet mounting shall be .134/.139 inch (3.40/3.53 mm) diameter, countersunk 100 degrees by .190/.200 inch (4.83/5.08 mm) diameter through holes with a counterbore of .190/.200 inch (4.83/5.08 mm) diameter by .300 inch (7.62 mm) deep.

Rivets. This card holder uses rivet style B as specified in A–A–59789 when rivet mounting is used.

Configuration hardware options. Card holders can have the following hardware options. See table I for the correct PIN configuration identifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Lockwasher and flat washer (see figure 3). A lockwasher and flat washer located under the screw head will provide for additional resistance to loosening from shock and vibration. Card holders requiring a lockwasher and flat washer shall include configuration identifier “F” or “J” in the PIN (see table I).

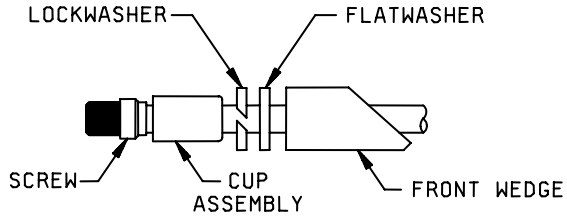


FIGURE 3. Lockwasher and flat washer details.

Screw self-locking element (see figure 4). The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock vibration. Card holders requiring a screw self-locking element shall include configuration identifier “J” or “N” in the PIN (see table I).

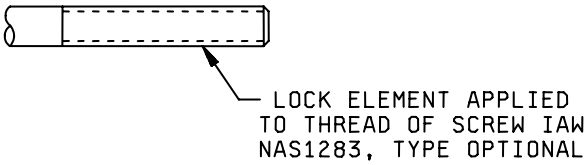


FIGURE 4. Screw self-locking element details.

Lockwasher, flat washer, and screw self-locking element. Card holders requiring a lockwasher, flat washer, and screw self-locking element option shall include configuration identifier “J” in the PIN (see table I).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59789 – Holder, Electrical Card, Wedge Retainers, 5 Piece, For Cold Plate Applications, General Requirements For.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Other Publications.

AEROSPACE INDUSTRIES ASSOCIATION (AIA)

AIA/NAS 1283 – Fasteners, Male Threaded, Self–locking.

(Application for copies should be addressed to the Aerospace Industries Association, 1250 Eye Street, NW, Suite 1200, Washington, DC 20005–3924 or at URL: http://www.aia-aerospace.org.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Ordering data. Ordering data is as specified in A–A–59789.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	Birtcher Pentair Electronic Packaging 14100 Danielson Street Poway, CA 92064–6898	Telephone: (858) 679–4550 Facsimile: (858) 679–4555 Electronic mail: infobirtcher@pentair-ep.com URL: www.birtcherproducts.com
52094	Calmark Corporation 4915 Walnut Grove Avenue San Gabriel, CA 91776–2099	Telephone: (626) 287–0451 Facsimile: (626) 287–7350 E-mail: sales@calmark.com URL: www.calmark.com

Part number supersession data. These CID specification sheet PINs supersede the following manufacturer's part numbers as shown in table III. The CID PINs listed in table III are only for length designator "50". See table IV for CID PIN construction using other available lengths for this CID specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59789/12	Vendor similar designator or type part number 1/ CAGE 18915	PIN designator AA59789/12	Vendor similar designator or type part number 1/ CAGE 52094
AB50V	44–5VI–10–B	AB50V	VA251–4.80T4
AB50R	44–5VI–10–B–R	AB50R	VA251–4.80H
AB50S	44–5VI–10–B–S	AB50S	VA251–4.80T2
AB50Y	44–5VI–10–B–M3	AB50Y	MVA251–4.80TM3
FB50V	44–5VI–10–B–LF	FB50V	WVA251–4.80T4
FB50R	44–5VI–10–B–LFR	FB50R	WVA251–4.80H
FB50S	44–5VI–10–B–LFS	FB50S	WVA251–4.80T2
FB50Y	44–5VI–10–BLFM3	FB50Y	MWVA251–4.80TM3
NB50V	44–5VI–10–B–L	NB50V	VA251–4.80T4L
NB50R	44–5VI–10–B–R–L	NB50R	VA251–4.80HL
NB50S	44–5VI–10–B–S–L	NB50S	VA251–4.80T2L
NB50Y	44–5VI–10–B–M3L	NB50Y	MVA251–4.80TM3L
JB50V	44–5VI–10–B–LFL	JB50V	WVA251–4.80T4L
JB50R	44–5VI–10–BLFRL	JB50R	WVA251–4.80HL
JB50S	44–5VI–10–BLFSL	JB50S	WVA251–4.80T2L
JB50Y	44–5VI–10BLFM3L	JB50Y	MWVA251–4.80TM3L

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data. – Continued.

PIN designator AA59789/12	Vendor similar designator or type part number 1/ CAGE 18915	PIN designator AA59789/12	Vendor similar designator or type part number 1/ CAGE 52094
AP50V	44–5VI–10–N	AP50V	VEN251–4.80T4
AP50R	44–5VI–10–N–R	AP50R	VEN251–4.80H
AP50S	44–5VI–10–N–S	AP50S	VEN251–4.80T2
AP50Y	44–5VI–10–N–M3	AP50Y	MVEN251–4.80TM3
FP50V	44–5VI–10–N–LF	FP50V	WVEN251–4.80T4
FP50R	44–5VI–10–NLFR	FP50R	WVEN251–4.80H
FP50S	44–5VI–10–NLFS	FP50S	WVEN251–4.80T2
FP50Y	44–5VI–10–NLFM3	FP50Y	MWVEN251–4.80TM3
NP50V	44–5VI–10–N–L	NP50V	VEN251–4.80T4L
NP50R	44–5VI–10–N–R–L	NP50R	VEN251–4.80HL
NP50S	44–5VI–10–N–S–L	NP50S	VEN251–4.80T2L
NP50Y	44–5VI–10–N–M3L	NP50Y	MVEN251–4.80TM3L
JP50V	44–5VI–10–N–LFL	JP50V	WVEN251–4.80T4L
JP50R	44–5VI–10–NLFRL	JP50R	WVEN251–4.80HL
JP50S	44–5VI–10–NLFSL	JP50S	WVEN251–4.80T2L
JP50Y	44–5VI–10NLFM3L	JP50Y	MWVEN251–4.80TM3L
AH50V	44–5VI–10–B3	AH50V	VHA251–4.80T4
AH50R	44–5VI–10–B3–R	AH50R	VHA251–4.80H
AH50S	44–5VI–10–B3–S	AH50S	VHA251–4.80T2
AH50Y	44–5VI–10–B3–M3	AH50Y	MVHA251–4.80TM3
FH50V	44–5VI–10–B3–LF	FH50V	WVHA251–4.80T4
FH50R	44–5VI–10–B3LFR	FH50R	WVHA251–4.80H
FH50S	44–5VI–10–B3LFS	FH50S	WVHA251–4.80T2
FH50Y	44–5VI–10B3LFM3	FH50Y	MWVHA251–4.80TM3
NH50V	44–5VI–10–B3–L	NH50V	VHA251–4.80T4L
NH50R	44–5VI–10–B3–RL	NH50R	VHA251–4.80HL
NH50S	44–5VI–10–B3–SL	NH50S	VHA251–4.80T2L
NH50Y	44–5VI–10–B3M3L	NH50Y	MVHA251–4.80TM3L

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data. – Continued.

PIN designator AA59789/12	Vendor similar designator or type part number 1/ CAGE 18915	PIN designator AA59789/12	Vendor similar designator or type part number 1/ CAGE 52094
JH50V	44–5VI–10–B3LFL	JH50V	WVHA251–4.80T4L
JH50R	44–5VI–10B3LFRL	JH50R	WVHA251–4.80HL
JH50S	44–5VI–10B3LFSL	JH50S	WVHA251–4.80T2L
JH50Y	44–5V–10B3LFM3L	JH50Y	MWVHA251–4.80TM3L
AD50V	44–5VI–10–B3D		
AD50R	44–5VI–10–B3D–R		
AD50S	44–5VI–10–B3D–S		
AD50Y	44–5VI–10–B3DM3		
FD50V	44–5VI–10–B3DLF		
FD50R	44–5VI–10B3DLFR		
FD50S	44–5VI–10B3DLFS		
FD50Y	44–5V–10B3DLFM3		
ND50V	44–5VI–10–B3D–L		
ND50R	44–5VI–10–B3DRL		
ND50S	44–5VI–10–B3DSL		
ND50Y	44–5VI–10B3DM3L		
JD50V	44–5VI–10B3DLFL		
JD50R	44–5VI10B3DLFRL		
JD50S	44–5VI10B3DLFSL		
JD50Y	44–5V10B3DLFM3L		

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Example of PIN with available length designators.

PIN designator AA59789/12	Vendor similar designator or type part number 1/ 2/ CAGE 18915	PIN designator AA59789/12	Vendor similar designator or type part number 1/ 2/ CAGE 52094
AB50S	44–5VI–10–B–S	AB50S	VA251–4.80T2
AB55S	44–5VI–11–B–S	AB55S	VA251–5.30T2
AB60S	44–5VI–12–B–S	AB60S	VA251–5.80T2
AB65S	44–5VI–13–B–S	AB65S	VA251–6.30T2

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

2/ Other lengths are available on request.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS

Preparing Activity:
DLA – CC

Project 5998–2006–033

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.