[INCH-POUND]
A–A–59789/6
August 28, 2006


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDERS, ELECTRICAL CARD, WEDGE RETAINERS, 5 PIECE, FOR COLD PLATE APPLICATIONS, LEVER ACTUATED, WITH LEVER EXTRACTION AND VISUAL LOCK INDICATION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59789.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

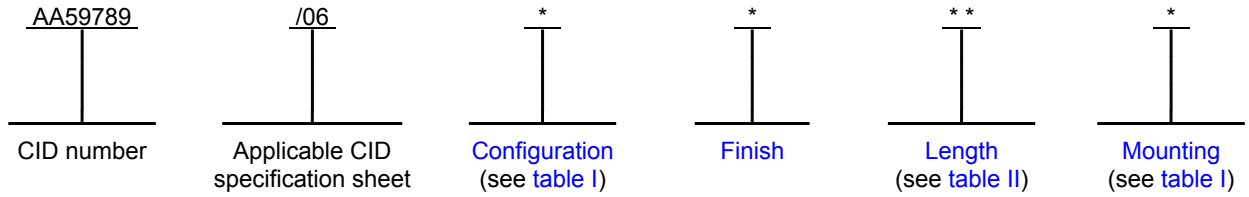

Example: AA59789/06FS40M is the PIN for a card holder with an actuating lever that locks the card holder into its installed position. The levers also allow for an extraction feature that forces the circuit card assembly to disengage from its installed position. The card holder is pre-set to a clamping force of 145 pounds (645 Newtons). The card holder has a black anodize finish and is 3.8 inch (97 mm) long The card holder also features two tapped mounting holes for use with metric M2.0 x 0.4 mm fasteners.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card firmly in place providing high resistance to shock and vibration while providing maximum thermal transfer between the circuit card assembly and the cold plate surfaces.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified in figures 1 and 2 and table I herein and meet the general requirements specified in CID A–A–59789.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59789.

Adjusting screw hex drive socket. The dimension for hex drive socket shall be .094 inch (2.38 mm) across flats.

Cold plate slot width (see figure 3). The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59789).

Lever actuation and visual lock indication (see figures 2 and 4). The card holder shall be equipped with a lever to actuate the card holder to secure the attached circuit card assembly in its installed position. When in the relaxed state, the card holders shall permit the circuit card assembly to be placed into or removed from its installed position with either a zero insertion force or a slight insertion/extraction drag. To secure the circuit card assembly in place, the lever shall be actuated towards the printed board, to become perpendicular with the card holder. Visual indication of the card holder locked position is when the lever is perpendicular with the card holder, and parallel with the printed board of the circuit card assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Lever extraction (see figure 2). The lever used for actuating the card holder can be used to extract the card holder and the attached circuit card assembly from its installed position.

Configuration (see table I, figures 1 and 3). The configuration of a card holders shall be as specified in table I. This card holder is available for mounting in either the left or right facing position and in various states of preset clamping force. Normal applications requires both left and right facing card holders. Right facing card hollder is depicted on figure 1. The configuration designator shall be included in the PIN.

TABLE I. Configurations. 1/

Configuration	Clamping force	Mounting options	Facing
E	Adjustment needed 2/	S, M, U	Left
F	Preset to 125 pounds (556 Newtons) 3/	S, M, U	
G	Preset to 145 pounds (645 Newtons) 3/	S, M, U	
Q	Adjustment needed 2/	S, M, U	Right
P	Preset to 125 pounds (556 Newtons) 3/	S, M, U	
T	Preset to 145 pounds (645 Newtons) 3/	S, M, U	

1/ Mounting body size is .250 x .260 (6.35 x 6.60 mm).
2/ See application data for adjustment procedure.
3/ This preset force is contingent on using the recommend cold plate slot width of .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly.

Finish. Finish designator “S” shall be used in the PIN. Finish “S” shall consist of the following:

(1) The bodies and wedges shall be black anodize with dry film lubricant in accordance with finish designator “Q” defined in A–A–59789.

(2) The shaft shall be black anodize in accordance with finish designator “B” defined in A–A–59789.

(3) The lever arm shall be hard black anodize in accordance with finish designator “H” defined in A–A–59789.

Length, expanded, and relaxed dimensions. The length designator shall be as specified in A–A–59789. The lengths available for this CID specification sheet are listed in table II. The length, expanded, and relaxed dimensions shall be as specified on figure 1. The length designator shall be included in the PIN.

Mounting. The mounting designators shall be as specified in A–A–59789. The mounting options available for this CID specification sheet are as follows: “S” (tapped 2-56 UNC 2B holes), “M” (tapped metric M2.5 x 0.45 holes), or “U” (tapped metric M2 x 0.4 holes). See figure 1 for mounting hole location and spacing requirements. The mounting designator shall be included in the PIN.


Rivet mount holes. Not available for this specification sheet.

TABLE II. Additional assembly dimensions (see figure 1). 1/

PIN length designator	Dimension “L” ± .02 (± 0.5)	Dimension “A” ± .005 (± 0.13)	Dimension “B” ± .005 (± 0.13)	Dimension “C” reference
30	2.80 (71.1)	.900 (22.86)	.450 (11.43)	4.03 (102.4)
40	3.80 (96.5)	1.900 (48.26)	.950 (24.13)	5.03 (127.8)
50	4.80 (121.9)	2.900 (73.66)	1.450 (36.83)	6.03 (153.2)

1/ Dimensions are in inches. Millimeters are given for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

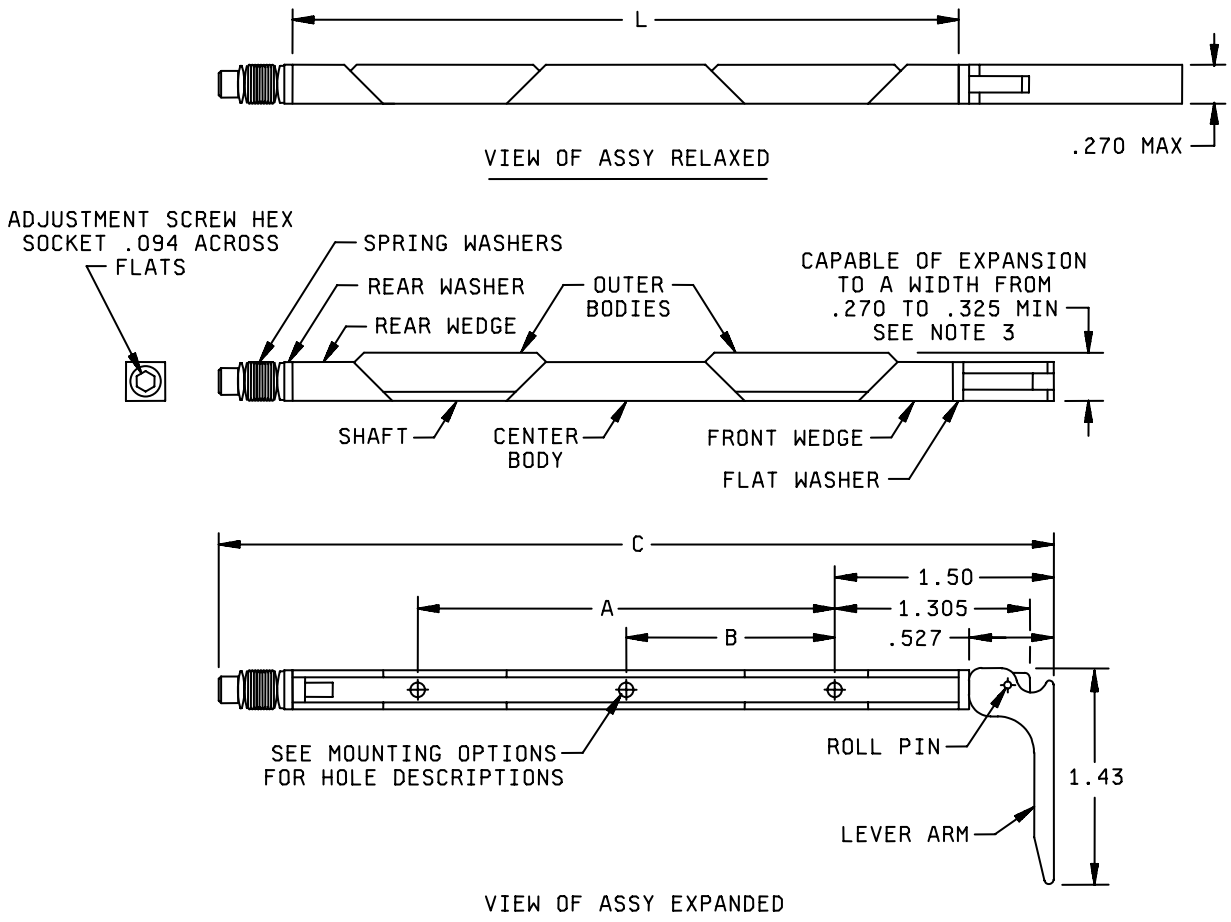


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.094	2.38	.270	6.86	.527	13.39	1.43	36.3
.250	6.35	.325	8.26	1.305	33.15	1.50	38.1

NOTES:

1. Dimensions are in inches. Millimeters are given for information only.
2. Unless otherwise specified, tolerances are for ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
3. Capable of expansion range of .270 (6.86 mm) maximum to .325 (8.25 mm) minimum. Adjustment is required to achieve the exact dimension within the expansion range.
4. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm).

FIGURE 1. Relaxed and expanded dimensions (left facing shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

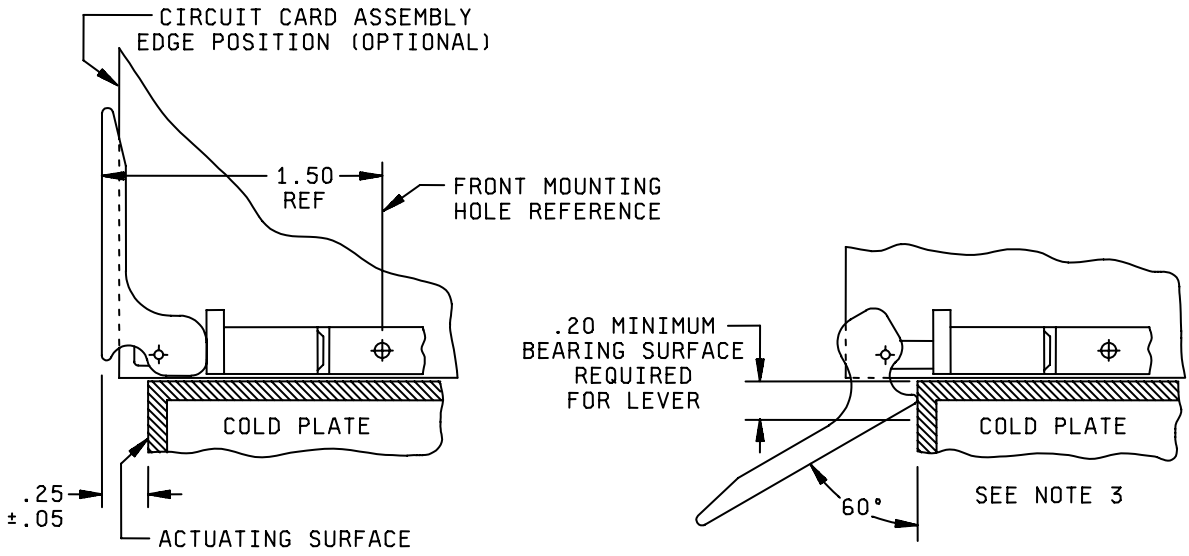

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.05	1.3	.20	5.1	.25	6.4	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeters are given for information only.
2. Unless otherwise specified, tolerances are for ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
3. Extraction travel of card holder is .25 ±.05 (6.4 ±1.3 mm) when lever is rotated to 60 degree angle as shown and .35 inch (8.9 mm) when lever is fully rotated.

FIGURE 2. Extraction details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

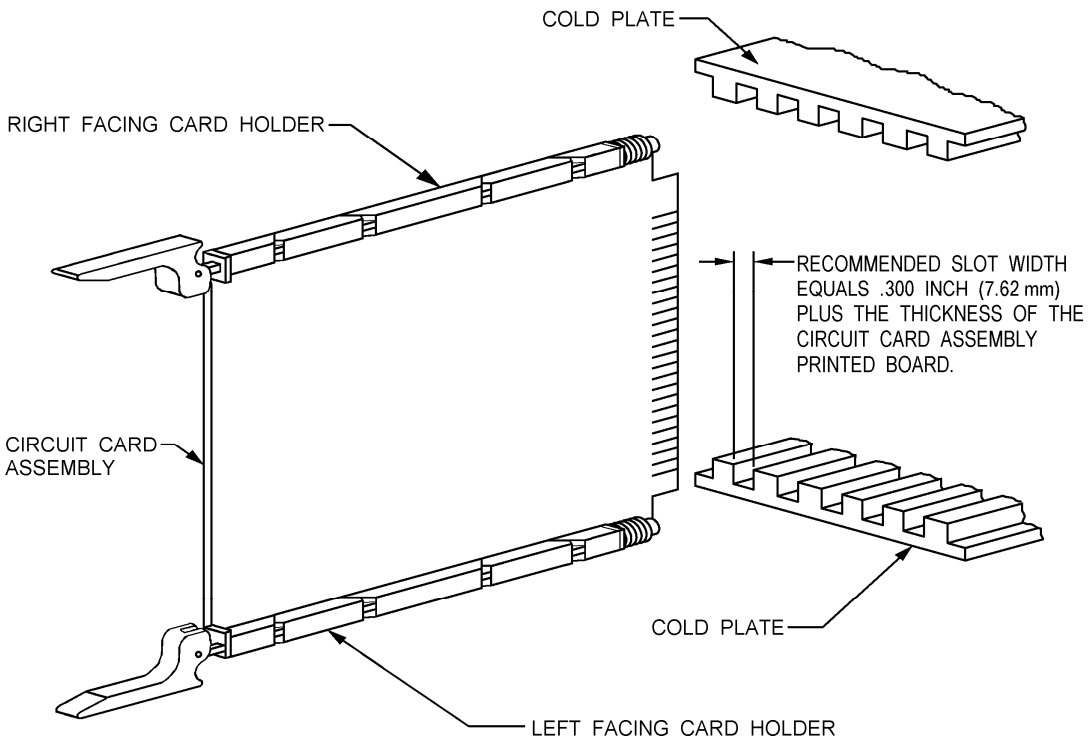


FIGURE 3. Facing and cold plate dimensions.

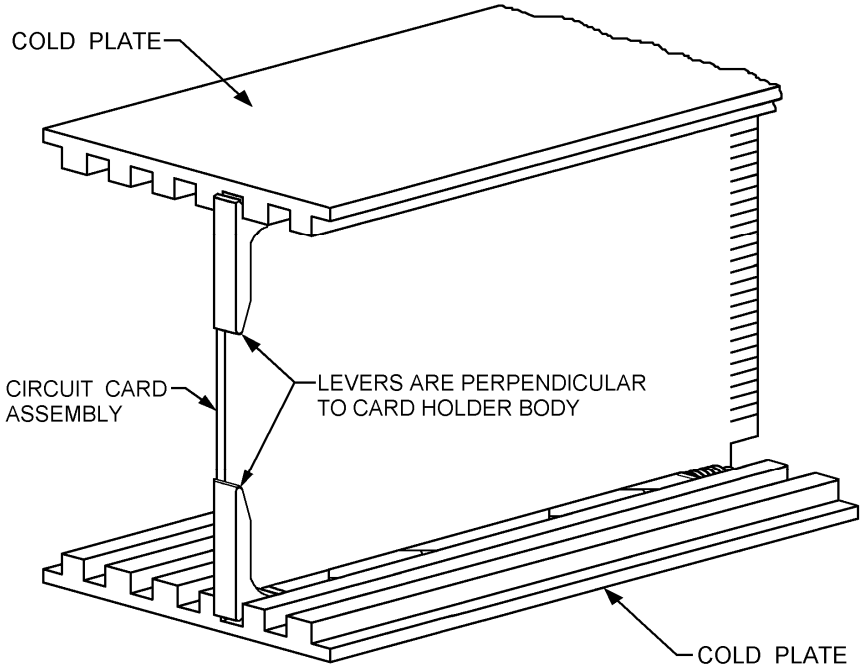


FIGURE 4. Visual indication of card holders in locked position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Application data for card holders. All card holders configurations, except for “E” and “Q”, are supplied assembled and have their clamping force pre-adjusted from the manufacturer. Card holders configurations “E” and “Q” are supplied assembled but are not adjusted for use from the manufacturer.

Clamping force adjustment procedure for configurations “E” and “Q”. In order to apply the proper clamping force of approximately 125 pounds (556 Newtons), card holders of configuration “E” and “Q” need to be adjusted in accordance with the following procedure:

(1) Fasten card holder to circuit card assembly.

(2) Insert circuit card assembly with card holders attached into cold plate.

(3) Actuate lever to locked/closed position.

(4) Tighten screw until wedges initially contact wall of cold plate slot, or slight insertion/extraction drag is felt.

(5) Additionally tighten screw two full turns.

The card holder is now adjusted and ready for use.

Clamping force data. Direct clamping force is approximately 125 pound force (556 Newtons) for configurations “F” and “P” or when configurations “E” and “Q” are adjusted in accordance with the procedure detailed herein. The direct force of card holder is affected as follows:

(1) 6 pound force (26.7 N) for each .001 inch (0.025 mm) variation of cold plate slot width, or

(2) 38 pound force (169.0 N) for each full turn of locknut.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59789	–	Holder, Electrical Card, Wedge Retainers, 5 Piece, For Cold Plate Applications, General Requirements For.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Ordering data. Ordering data is as specified in A–A–59789.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
52094	Calmark Corporation 4915 Walnut Grove Avenue San Gabriel, CA 91776–2099	Telephone: (626) 287–0451 Facsimile: (626) 287–7350 E-mail: sales@calmark.com URL: www.calmark.com

Part number supersession data. These CID specification sheet PINs supersede the following manufacturer's part numbers as shown in table III. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59789/06	Vendor similar designator or type part number 1/ CAGE 52094	PIN designator AA59789/06	Vendor similar designator or type part number 1/ CAGE 52094
ES30S	LE260–2.80–1	QS30S	LE260–2.80–2
ES40S	LE260–3.80–1	QS40S	LE260–3.80–2
ES50S	LE260–4.80–1	QS50S	LE260–4.80–2
FS50S	LE260–2.80–1P	PS30S	LE260–2.80–2P
FS50S	LE260–3.80–1P	PS40S	LE260–3.80–2P
FS50S	LE260–4.80–1P	PS50S	LE260–4.80–2P
GS30S	LE260–2.80–1P2	TS30S	LE260–2.80–2P2
GS40S	LE260–3.80–1P2	TS40S	LE260–3.80–2P2
GS50S	LE260–4.80–1P2	TS50S	LE260–4.80–2P2
ES30M	LE260–2.80TM2–1	QS30M	LE260–2.80TM2–2
ES40M	LE260–3.80TM2–1	QS40M	LE260–3.80TM2–2
ES50M	LE260–4.80TM2–1	QS50M	LE260–4.80TM2–2
FS50M	LE260–2.80TM2–1P	PS30M	LE260–2.80TM2–2P
FS50M	LE260–3.80TM2–1P	PS40M	LE260–3.80TM2–2P
FS50M	LE260–4.80TM2–1P	PS50M	LE260–4.80TM2–2P
GS30M	LE260–2.80TM2–1P2	TS30M	LE260–2.80TM2–2P2
GS40M	LE260–3.80TM2–1P2	TS40M	LE260–3.80TM2–2P2
GS50M	LE260–4.80TM2–1P2	TS50M	LE260–4.80TM2–2P2

See note at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59789/06	Vendor similar designator or type part number 1/ CAGE 52094	PIN designator AA59789/06	Vendor similar designator or type part number 1/ CAGE 52094
ES30U	LE260–2.80TM2.5–1	QS30U	LE260–2.80TM2.5–2
ES40U	LE260–3.80TM2.5–1	QS40U	LE260–3.80TM2.5–2
ES50U	LE260–4.80TM2.5–1	QS50U	LE260–4.80TM2.5–2
FS50U	LE260–2.80TM2.5–1P	PS30U	LE260–2.80TM2.5–2P
FS50U	LE260–3.80TM2.5–1P	PS40U	LE260–3.80TM2.5–2P
FS50U	LE260–4.80TM2.5–1P	PS50U	LE260–4.80TM2.5–2P
GS30U	LE260–2.80TM2.5–1P2	TS30U	LE260–2.80TM2.5–2P2
GS40U	LE260–3.80TM2.5–1P2	TS40U	LE260–3.80TM2.5–2P2
GS50U	LE260–4.80TM2.5–1P2	TS50U	LE260–4.80TM2.5–2P2

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS

Preparing Activity:
DLA – CC

Project 5998–2006–015

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.