[INCH–POUND]

A–A–59789/8B
8 November 2016
SUPERSEDING
A–A–59789/8A
8 November 2011

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 5 PIECE, FOR COLD PLATE APPLICATIONS, .195 X .250 INCH BODY SIZE, SHAFT MOUNTING BODY,SCREW ACTUATED, WITH VISUAL LOCK INDICATION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59789.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see notes).



Example: AA59789/08LH50S is the PIN for a hard black anodize finished, 4.8 inch (121.9 mm) long card holder with visual lock indication. The card holder also features two tapped mounting holes for use with 2–56 UNC 2B fasteners and a screw self–locking element for added resistance to loosening.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card assembly it is attached to firmly in its installed position and prevent loosening or movement as a result of shock and vibration. The card holder shall also provide a thermal transfer path from the circuit card assembly to the cold plate or heat sink surfaces.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A–A–59789. Card holders shall have a visual indicator to show when the assembly is in its relaxed (unlocked) and expanded (locked) state.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59789.

Actuating screw hex drive socket. The dimension for hex drive socket shall be .094 inch (2.38 mm) across flats for mounting options "M", "R", "S", "T", and "U".

Cold plate slot width. The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .220 inch (5.59 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59789).


Installation torque. The recommended nominal installation torque is follows: 6 inch-pounds (0.7 N-m) for card holders of configuration "C" or "E" and 7 to 8 inch-pounds (0.8 to 0.9 N-m) for assemblies of configurations "L" or "D".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Configuration. The configuration of a card holder shall be as specified in table I. The details of a particular configuration consist of those on figure 1 and 2, and may include those on figures 3 and 4.

TABLE I. Configuration.

Configuration	Applicable figures	Hardware options
C	1 and 2	No added options
L	1, 2, and 3	Screw self-locking element
E	1, 2, and 4	Additional mounting hole
D	1, 2, 3, and 4	Screw self-locking element and additional mounting hole

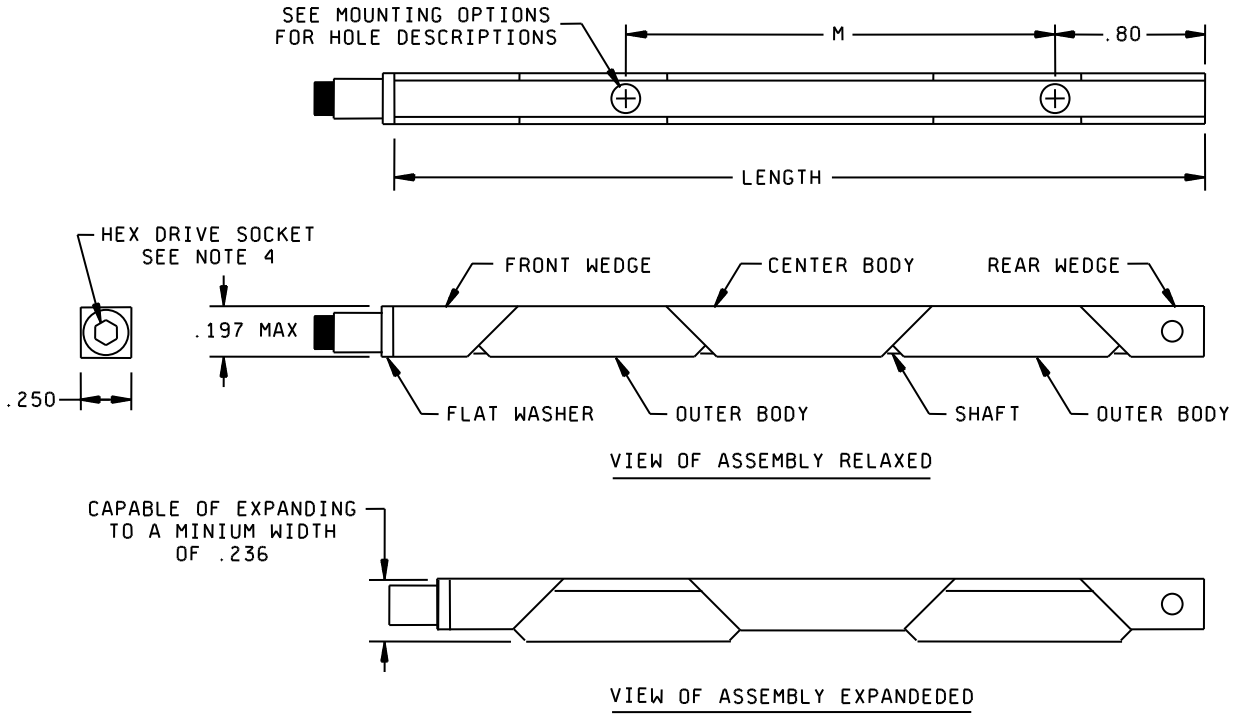

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.197	5.00	.236	5.99	.250	6.35	.80	20.32

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are for ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Tolerance for the hole spacing is ±.005 inch (0.51 mm).
4. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm).

FIGURE 1. Relaxed and expanded dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Finish. The finish designator shall be as specified in A–A–59789. The finishes available for this CID specification sheet are as follows: "B" (black anodize), "E" (electroless nickel), "H" (hard black anodize), or "R" (clear chemical film).

Length, expanded and relaxed dimensions. The length designator shall be as specified in A–A–59789 and the lengths available for this CID specification sheet are listed in table II. The length, expanded, and relaxed dimensions shall be as specified on figure 1.

Visual lock indicator (see figure 2). Card holders shall have a visual indicator to show when the card holder is in its relaxed (unlocked) state. When the card holder is in the unlocked (relaxed) state, the end of the actuating screw shall display a red band on the side of the screw. When the actuating screw on the card holder has been tightened (assembly expanded) so that the assembly is in the locked position, this red band shall be concealed.

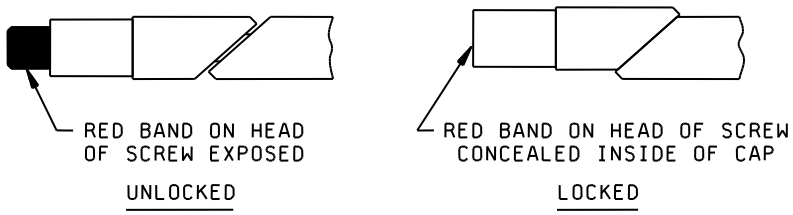


FIGURE 2. Visual lock indicator.

TABLE II. Additional card holder dimensions (see figure 1). 1/

PIN length designator	Dimension "Length" ±.02 (0.5)	Dimension "M" ±.01 (0.3)	Dimension "M/2" ±.02 (0.5)
30	2.80 (71.1)	.90 (22.9)	.45 (11.4)
40	3.80 (96.5)	1.90 (48.3)	.95 (24.1)
50	4.80 (121.9)	2.90 (73.7)	1.45 (36.8)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Mounting. The mounting designators shall be as specified in A–A–59789. The mounting options available for this CID specification sheet are as follows: "M" (tapped metric M2.5 x 0.45 holes), "R" (rivet mount holes with counterbore and countersink), "S" (tapped 2-56 holes), "T" (tapped 0-80 holes), or "U" (tapped metric M2 x 0.4 holes). See figure 1 for mounting hole spacing requirements.

Rivet mounting holes. The holes used for rivet mounting shall be .068/.073 inch (1.73/1.85 mm) diameter, countersunk 100 degrees by .060 inch (1.52 mm) deep.

Rivets. This card holder uses rivet type A as specified in A–A–59789 when rivet mounting is used.

Configuration hardware options. Card holders can have the following hardware options: No hardware options added (see figures 1 and 2), screw self lock element (see figure 3), additional mounting hole (see figure 4), or screw self lock element and additional mounting hole (see figures 3 and 4). See table I for the correct PIN configuration identifier.

No hardware options added. The base configuration of the card holder is as depicted by figures 1 and 2. Card holders not requiring any added hardware options shall include configuration identifier "C" in the PIN (see classification, notes, and table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Screw self-locking element (see figure 3). The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock vibration. The screw self-locking element shall be as specified in A–A–59789. Card holders requiring a screw self-locking element shall include configuration identifier "L" in the PIN (see classification, notes, and table I).

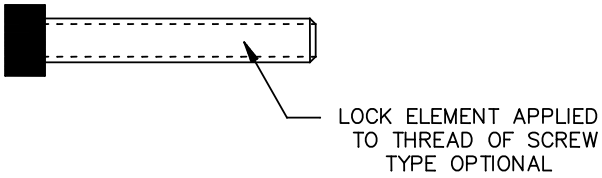


FIGURE 3. Screw self-locking element details.

Additional mounting hole (see figure 4). Card holders requiring an additional mounting hole shall include configuration identifier "E" in the PIN (see classification, notes, and table I).

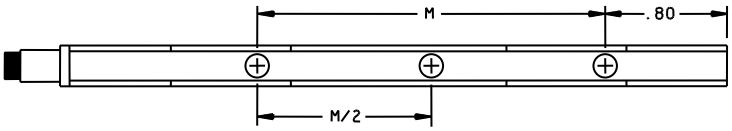


FIGURE 4. Additional mounting hole details.

Screw self-locking element and additional mounting hole. Card holders requiring a screw self-locking element and an additional mounting hole options shall include configuration identifier "D" in the PIN (see classification, notes, and table I).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59789 – Holder, Electrical Card, Wedge Retainers, 5 Piece, For Cold Plate Applications, General Requirements For.

(Copies of these documents are available online at http://quicksearch.dla.mil.)

Other Publications

AEROSPACE INDUSTRIES ASSOCIATION (AIA)

AIA/NAS 1283 – Fasteners, Male Threaded, Self–locking.

(Copies of this document are available online at http://www.aia-aerospace.org or from the Aerospace Industries Association of America Inc., 1000 Wilson Blvd, Suite 1700 Arlington, VA 22209.)

Ordering data. Ordering data shall be as specified in A–A–59789.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806–1231	Telephone: (714) 738–6194 Facsimile: (714) 446–0119 E-mail: sales@accrmfg.com URL: www.accrmfg.com
61081	Pentair Technical Products (formerly Calmark) 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 E-mail: schroff.us@pentair.com URL: http://www.pentairprotect.com

Part number supersession data. This CID specification sheet PINs supersedes the following manufacturer's part numbers as shown in table III. The CID PINs listed in table III are only for length designator "50". See table IV for CID PIN construction using other available lengths for this CID specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59789/08	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
CB50M	VA267–4.80TM2.5	5192VBA–4.80TM2.5
CB50R	VA267–4.80H	5192VBA–4.80H
CB50S	VA267–4.80T2	5192VBA–4.80T2
CB50T	VA267–4.80T0	5192VBA–4.80T0
CB50U	VA267–4.80TM2	5192VBA–4.80TM2
LB50M	VA267–4.80TM2.5L	5192VBA–4.80TM2.5L
LB50R	VA267–4.80HL	5192VBA–4.80HL
LB50S	VA267–4.80T2L	5192VBA–4.80T2L
LB50T	VA267–4.80T0L	5192VBA–4.80T0L
LB50U	VA267–4.80TM2L	5192VBA–4.80TM2L
EB50M	VA267–4.80ETM2.5	5192VBA–4.80ETM2.5
EB50R	VA267–4.80EH	5192VBA–4.80EH
EB50S	VA267–4.80ET2	5192VBA–4.80ET2
EB50T	VA267–4.80ET0	5192VBA–4.80ET0
EB50U	VA267–4.80ETM2	5192VBA–4.80ETM2

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59789/08	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
DB50M	VA267–4.80ETM2.5L	5192VBA–4.80ETM2.5L
DB50R	VA267–4.80EHL	5192VBA–4.80EHL
DB50S	VA267–4.80ET2L	5192VBA–4.80ET2L
DB50T	VA267–4.80ET0L	5192VBA–4.80ET0L
DB50U	VA267–4.80ETM2L	5192VBA–4.80ETM2L
CE50M	VEN267–4.80TM2.5	5192VEN–4.80TM2.5
CE50R	VEN267–4.80H	5192VEN–4.80H
CE50S	VEN267–4.80T2	5192VEN–4.80T2
CE50T	VEN267–4.80T0	5192VEN–4.80T0
CE50U	VEN267–4.80TM2	5192VEN–4.80TM2
LE50M	VEN267–4.80TM2.5L	5192VEN–4.80TM2.5L
LE50R	VEN267–4.80HL	5192VEN–4.80HL
LE50S	VEN267–4.80T2L	5192VEN–4.80T2L
LE50T	VEN267–4.80T0L	5192VEN–4.80T0L
LE50U	VEN267–4.80TM2L	5192VEN–4.80TM2L
EE50M	VEN267–4.80ETM2.5	5192VEN–4.80ETM2.5
EE50R	VEN267–4.80EH	5192VEN–4.80EH
EE50S	VEN267–4.80ET2	5192VEN–4.80ET2
EE50T	VEN267–4.80ET0	5192VEN–4.80ET0
EE50U	VEN267–4.80ETM2	5192VEN–4.80ETM2
DE50M	VEN267–4.80ETM2.5L	5192VEN–4.80ETM2.5L
DE50R	VEN267–4.80EHL	5192VEN–4.80EHL
DE50S	VEN267–4.80ET2L	5192VEN–4.80ET2L
DE50T	VEN267–4.80ET0L	5192VEN–4.80ET0L
DE50U	VEN267–4.80ETM2L	5192VEN–4.80ETM2L
CH50M	VHA267–4.80TM2.5	5192VBH–4.80TM2.5
CH50R	VHA267–4.80H	5192VBH–4.80H
CH50S	VHA267–4.80T2	5192VBH–4.80T2
CH50T	VHA267–4.80T0	5192VBH–4.80T0
CH50U	VHA267–4.80TM2	5192VBH–4.80TM2

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59789/08	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
LH50M	VHA267–4.80TM2.5L	5192VBH–4.80TM2.5L
LH50R	VHA267–4.80HL	5192VBH–4.80HL
LH50S	VHA267–4.80T2L	5192VBH–4.80T2L
LH50T	VHA267–4.80T0L	5192VBH–4.80T0L
LH50U	VHA267–4.80TM2L	5192VBH–4.80TM2L
EH50M	VHA267–4.80ETM2.5	5192VBH–4.80ETM2.5
EH50R	VHA267–4.80EH	5192VBH–4.80EH
EH50S	VHA267–4.80ET2	5192VBH–4.80ET2
EH50T	VHA267–4.80ET0	5192VBH–4.80ET0
EH50U	VHA267–4.80ETM2	5192VBH–4.80ETM2
DH50M	VHA267–4.80ETM2.5L	5192VBH–4.80ETM2.5L
DH50R	VHA267–4.80EHL	5192VBH–4.80EHL
DH50S	VHA267–4.80ET2L	5192VBH–4.80ET2L
DH50T	VHA267–4.80ET0L	5192VBH–4.80ET0L
DH50U	VHA267–4.80ETM2L	5192VBH–4.80ETM2L
CR50M	VR267–4.80TM2.5	5192VCC–4.80TM2.5
CR50R	VR267–4.80H	5192VCC–4.80H
CR50S	VR267–4.80T2	5192VCC–4.80T2
CR50T	VR267–4.80T0	5192VCC–4.80T0
CR50U	VR267–4.80TM2	5192VCC–4.80TM2
LR50M	VR267–4.80TM2.5L	5192VCC–4.80TM2.5L
LR50R	VR267–4.80HL	5192VCC–4.80HL
LR50S	VR267–4.80T2L	5192VCC–4.80T2L
LR50T	VR267–4.80T0L	5192VCC–4.80T0L
LR50U	VR267–4.80TM2L	5192VCC–4.80TM2L
ER50M	VR267–4.80ETM2.5	5192VCC–4.80ETM2.5
ER50R	VR267–4.80EH	5192VCC–4.80EH
ER50S	VR267–4.80ET2	5192VCC–4.80ET2
ER50T	VR267–4.80ET0	5192VCC–4.80ET0
ER50U	VR267–4.80ETM2	5192VCC–4.80ETM2

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59789/08	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
DR50M	VR267–4.80ETM2.5L	5192VCC–4.80ETM2.5L
DR50R	VR267–4.80EHL	5192VCC–4.80EHL
DR50S	VR267–4.80ET2L	5192VCC–4.80ET2L
DR50T	VR267–4.80ET0L	5192VCC–4.80ET0L
DR50U	VR267–4.80ETM2L	5192VCC–4.80ETM2L

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

PIN length examples. The CID PINs listed in table IV are for all available standard card holder lengths for this specification sheet. However, only one specific finish, mounting and configuration are listed (see PIN example for a break-down of the codes).

TABLE IV. Example of PIN with available length designators.

PIN designator AA59789/08	Vendor similar designator or type part number 1/ 2/ CAGE 61081	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68
LH30S	VHA267–2.80T2L	5192VBH–2.80T2L
LH40S	VHA267–3.80T2L	5192VBH–3.80T2L
LH50S	VHA267–4.80T2L	5192VBH–4.80T2L

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

2/ Other lengths are available on request.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA – CC

Project 5998–2016–028

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.