A-A-52002
April 29, 1987

# COMMERCIAL ITEM DESCRIPTION

## LEVEL, CIRCULAR, ROD

The General Services Administration has authorized the use of this commercial item description in preference to Military Specification MIL-L-11566C(ME).

This description covers circular levels to indicate the plumb of level rods and range poles.

Salient characteristics:

Design: This level shall consist of a circular level vial adjustably mounted on a right angle support, as shown in figure 1.

Material: The level shall be fabricated from compatible materials, inherently corrosion resistant or treated to have protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environments to which the item may be exposed. Dissimilar metals as defined in MIL-STD-889 shall be electrically insulated from one another to minimize or prevent galvanic corrosion.

Circular level vial: The circular level vial shall have a sensitivity of 20 minutes, plus or minus 10 percent, of arc for 2 millimeter (mm) displacement. The mounted vial shall be adjustable on the bracket of the support at three points. The vial shall be firmly positioned within the mounting.

Regulatory requirements: The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Packaging and marking: Military packaging shall be specified when shipments are to overseas Department of Defense (DoD) consignees. Commercial packaging may be specified for shipments to DoD consignees within the Continental United States and to non-DoD consignees worldwide. When a supplier's normal packaging will satisfy the requirements for military packaging, it may be used.

Military packaging: Each level shall be preserved and packed to protect against physical damage and deterioration in a logistic environment characterized by the following:

1. Multiple handling during transportation and intransit storage.
2. Shock, vibration, and static loading forces during worldwide shipment by all transport modes.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

3. Uncontrolled warehouse storage for extended periods.
4. Weather exposure during shipment and intransit transfers.
5. Stacking loads during shipment and storage.

Quantities of levels destined to a single addressee may be unitized into one or more unit loads.

Commercial. Each level shall be packaged in accordance with the supplier's normal method for retail distribution. Levels shipped to a single destination may be unitized to permit handling as a single unit. Shipping containers shall comply with Uniform Freight Classificaiton or National Motor Freight Classification rules.

Marking. Unit, intermediate (when provided), and exterior packs shall be marked with the item nomenclature, stock or part number, quantity per pack, and contract number as a minimum; additional marking shall be as specified in the contract or order. Exterior packs shall have in addition the complete consignee's address. Markings shall be applied in a legible manner, in a contrasting color, of an appropriate size, and of waterproof materials.

Quality assurance. The levels shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

1. Design not as specified.
2. Material not as specified.
3. Sensitivity not as specified.
4. Packaging and marking not as specified.

Certification of commercial item. The contractor shall certify that the product offered to the Government meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product as the manufacturer's current product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Small business. A small business that cannot meet the certification-of-commercial-item requirement of this document, may make an offer under this solicitation; and, if such small business is the apparent successful offeror, the Government may require the small business to submit a sample circular rod level. Any such level may be evaluated for this solicitation if time to contract award permits. Such evaluation would be to determine conformance to all requirements of this commercial item description and to determine equivalency to circular rod levels available in the commercial marketplace in the areas of durability, human factors engineering, and safety. It should be noted that samples are not required unless specifically requested by the



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

contracting officer. Note. The Government may elect not to evaluate a sample from an apparent low bidder for award for this solicitation if a determination of urgency is made by the contracting officer. The sample would then be evaluated prior to future solicitation for comparable items.

Notes:

1. Figure 1 is included for illustration only and is not intended to preclude the furnishing of other levels which conform to this description.
2. When this commercial item description is used for procurement, the item certification clause must appear in the solicitation.

MILITARY INTERESTS:

Custodian

Army - ME

Review activity

DLA - GS

PREPARING ACTIVITY:

Army - ME

Project 6675-A248



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

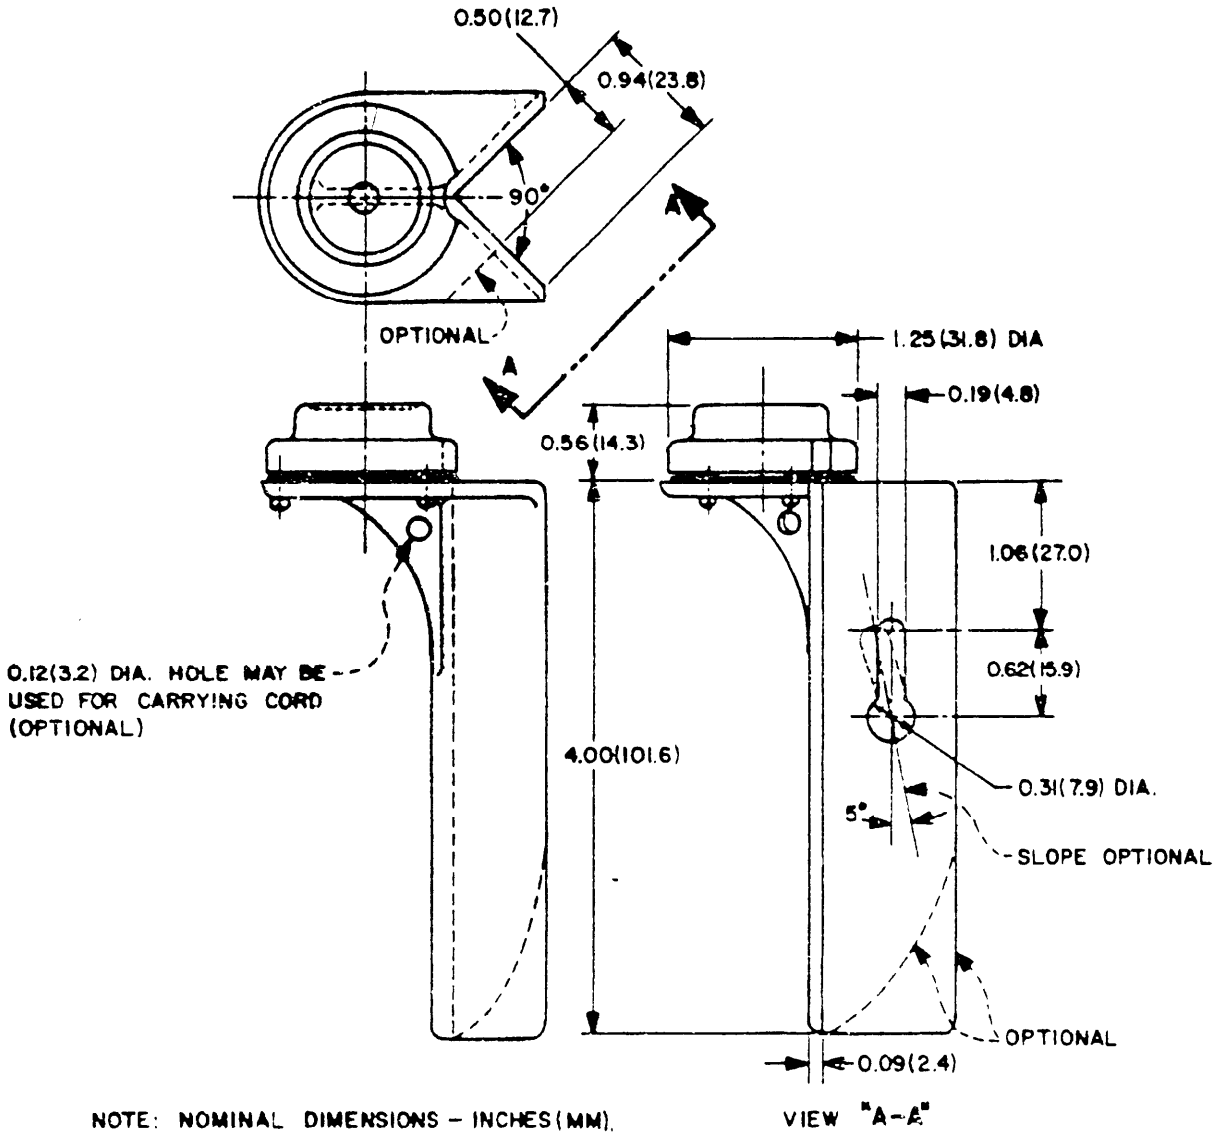



FIGURE 1. Level, circular rod.

X-3377A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.