[INCH-POUND]
A-A-52014A
March 6, 1996
SUPERSEDING
A-A-52014
17 November 1989
MIL-H-3751B
19 March 1976

COMMERCIAL ITEM DESCRIPTION

HARROW, DISK TYPE, TANDEM

The General Services Administration has authorized the use of this Commercial Item Description (CID), for all federal agencies.

1. SCOPE. This CID covers requirements for a multi-purpose, disk type, tandem harrows, hereinafter called "harrows", used in the mixing of aggregate and bituminous materials with subgrade soils in progressive stabilization of military roadbeds.

2. CLASSIFICATION. Harrows shall be of the following types, classes, and sizes:

Type I - Single Tandem.
Type II - Double Tandem.

Class 1 - Notched front disk blades and solid rear blades.
Class 2 - Solid front disk blades and solid rear blades.

Size 8 - 8 foot cutting width.
Size 10 - 10 foot cutting width.
Size 12 - 12 foot cutting width.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

AMSC N/A FSC 3710

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Materials. Materials shall be in accordance with the manufacturer's material specifications for harrows. The use of recovered material made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 4.1).

3.1.1 Dissimilar metals. Dissimilar metals shall not be used in extremely close contact or having direct contact with each other unless protected against galvanic corrosion.

3.2 Design and construction. The harrows shall be constructed as a tandem unit. The harrows shall withstand operation and service without malfunction or permanent deformation and shall meet the operational requirements specified herein. All components subject to wear, breakage, or distortion shall be accessible for adjustment and repair.

3.2.1 Disk blades. The harrows shall be furnished in the manufacturer's standard configuration, the blades shall be gang mounted and spaced according to standard procedures.

3.2.2 Angling. An angling device shall be provided for changing the angle of the harrows in relation to the direction of travel. The angle shall be adjustable between 13 to 24 degrees. Provisions shall be made for automatically securing the angle of the disks in not less than 6 locked positions including both the parallel and maximum positions.

3.2.3 Leveling device. A hand-crank or spring rod type leveling device shall be provided on the disk to accomplish initial disk leveling and to readjust the disk depth penetration, during operation, to accommodate various soils or ground cover conditions. The force required to actuate the leveling control shall not exceed 30 pounds.

3.2.4 Disk scrapers. The harrows shall be equipped with rigid or spring-loaded, adjustable, disk scrapers that will scrape all types of soil from the blades.

3.2.5 Hitch. The harrows shall be furnished with an adjustable, self-leveling hitch capable of maintaining a uniform preset cutting depth under varying soil and ground surface conditions.

3.2.6 Wheels and tires. Unless otherwise specified, the harrows shall be furnished with 15-inch, single, 4 or 6 bolt type wheels equipped with 6-ply rating tires (see 7.3).

3.3 Attachments. Safety attachments, such as slow moving vehicle (SMV) emblem, warning lights, transport locks, etc., usually required for highway transport, shall be furnished and installed on the harrows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

3.3.1 Lifting and tiedown attachments. When specified, the harrows shall be provided with lifting and tiedown attachments (see 7.3).

3.4 Transportability. The harrows shall be capable of highway, rail or marine transport.

3.5 Treatment and painting. The harrows shall be cleaned, treated, and painted in accordance with the manufacturer's standard practice. Unless otherwise specified, paint color shall be the manufacturer's standard used for this equipment (see 7.3).

3.6 Identification and markings. Identification and markings shall be permanent and legible and shall include , as a minimum, the manufacturer's identification code (CAGE), the contract number, and the part identification number (PIN) (see 7.1 and 7.3).

4. REGULATORY REQUIREMENTS

4.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

5.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3).

7. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

7.1 Part or Identification Number (PIN). The PINs to be used for harrows acquired to this CID are created as follows (see 7.3):

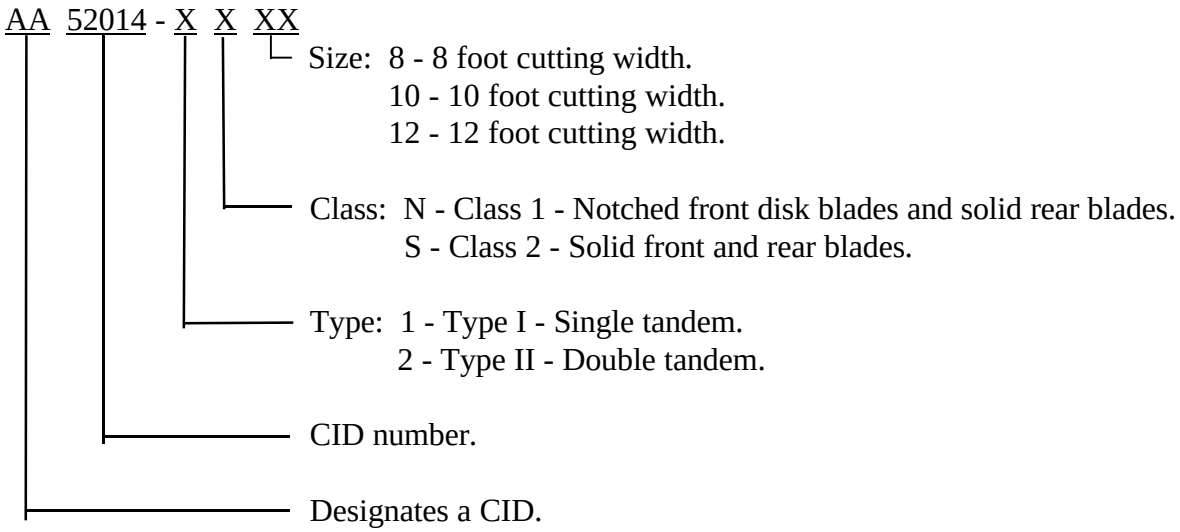

7.2 Addresses for obtaining copies of referenced documents.

7.2.1 Government documents. The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.3 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of the DoDISS to be cited in the solicitation, and if required, the specified issue of individual documents referenced.
c. When wheels other than specified are required.
d. When lifting and tiedown attachments are required.
e. When paint color other than specified is required.
f. PIN and quantity of harrows required.
g. Selection of applicable level and packaging requirements.

7.4 Cross-reference data. Size 10 and 12 harrows conforming to this CID are interchangeable/ substitutable with harrows conforming to A-A-52014. Size 8 harrows conforming to this CID are interchangeable/substitutable with harrows conforming to MIL-H-3751B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activity:
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 3710-0011)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.