A-A-52015
9 January 1990

COMMERCIAL ITEM DESCRIPTION

TAGLINES, CRANE, SPRING-LOADED, REEL TYPE

The General Services Administration has authorized the use of this commercial item description in preference to Military Specification MIL-T-52198.

This description covers spring-loaded, independently operating, reel type taglines capable of maintaining constant tension on a clamshell bucket or other types of crane loads to prevent rotation while the load is suspended freely.

Salient characteristics.

Classification. Taglines shall be one of the following sizes, as specified:

Size 50 - For use with 1/2 cubic yard (cu. yd.) capacity bucket.
Size 75 - For use with 3/4 cu. yd. capacity bucket.
Size 150 - For use with 1 and 1-1/2 cu. yd. capacity buckets.
Size 200 - For use with 2 cu. yd. capacity bucket.
Size 350 - For use with 2 cu. yd. up to 3-1/2 cu. yd. capacity buckets.

General. Taglines shall be a commercial product and the latest model of the manufacturer's standard product that has been manufactured, marketed, and accepted commercially for a period of one year prior to invitation for bid or request for proposal. The manufacturer's latest product improvements incorporated in their current production taglines are acceptable. When specific requirements are not stated herein, all items listed as standard equipment in the manufacturer's published specifications, brochures, and catalogs which are normally furnished to the commercial customer as standard equipment shall be furnished. In addition, the taglines shall be equipped with optional equipment and accessories as required to comply with the performance requirements specified herein. Optional equipment, for the purpose of this item description, may be defined as equipment not standard or normally furnished with the taglines but which is available to the commercial customer on an optional basis. Any additional equipment or accessories specified to satisfy military requirements shall also be considered optional and processed accordingly. The taglines shall be constructed, assembled, and equipped with all components, whether or not specified

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and other data which may improve this document should be sent by letter to: Commander, US Army Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

AMSC N/A FSC 3815

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

herein, necessary to enable the item to function reliably and efficiently in sustained operation. The taglines shall conform to all Federal laws and regulations applicable for this type equipment which are in effect on the date of contract award.

Design. Taglines shall be of the independently operating, automatic reel type with an adjustable tension mechanism permitting desired tension to be attained by manually reversing the rotation of the tagline reel, or with desired tension preset durirg fabrication. The taglines shall consist essentially of a reel attached to one or more helical spring-loaded cylinders and a fairlead consisting of two sheaves, a bell cable guide, or a spiral spring-loaded reel and a fairlead consisting of two sheaves and two rollers. The taglines shall be capable of being mounted on either side of the crane boom, inside the crane boom, or on the gantry frame. Each tagline shall be complete and ready for operation with the reel filled with wire rope of proper size and length and with all parts necessary for installation.

Performance. Taglines, when properly installed, shall be capable of providing sufficient tension to keep the crane load from turning and fouling the crane hoisting and closing lines. Tension exerted shall be sufficient for efficient performance through all operating cycles with a crone equipped with a boom of a length as specified in table I, positioned at a 60 degree angle, and with a clamshell bucket or similar attachment operating in any position from maximum height to not less than 20 feet below ground level. Taglines shall be equipped with sufficient wire rope to permit conformance to the payout capabilities specified in table I, with not less than two full wraps remaining on the reel.

TABLE I. Performance requirements

Tagline Size	Bucket Capacity (cu. yd.)	Crane Boom Length (feet)	Approx. Maximum Tension Required (pounds)	Maximum Wire Rope Payout Capacity (feet)
50	1/2	30	190	60
75	3/4	60	195	70
150	1 and 1-1/2	80	180	90
200	2	100	275	125
350	2 to 3-1/2	80	350	90

Reel. The tagline reel shall be of sufficient size to accomodate all necessary wire rope as specified herein. Adequate means shall be provided to anchor on end of the rope to the reel.

Fairlead. The tagline fairlead shall consist of two sheaves, a bell cable guide, or two sheaves and two guide rollers connected to the tagline

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:04Z
Check the source to verify that this is the current version before use.

mechanism by a steel bracket. Fairlead sheaves shall be heat-treated hardened steel with smooth rope grooves. Groove diameters shall be not less than the diameter of the wire rope and the inside diameter of the bell cable guide shall be not less than the diameter of the wire rope specified herein.

wire rope. Wire rope furnished with the tagline shall be 6 by 19, filler wire construction, improved plow steel, uncoated, fiber core, right regular lay. The diameter of the wire rope shall be not less than 5/16 inch with a nominal breaking strength of not less than 8,400 pounds. The terminal (outside) end of the wire rope shall be properly seized, fitted with a thimble suitable for the wire rope specified herein, and secured by not less than two cable clamps.

Material. Taglines shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the taglines may be exposed.

Treatment and painting. Unless otherwise specified, the taglines shall be cleaned, treated and painted in accordance with the manufacturers normal method for the commercial market. When specified, the portions of the tagline normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified, the finish coat shall be the manufacturer's standard color provided the finished paint thickness required by MIL-T-704 is met. When specified, chemical agent resistant coating (CARC) conforming to MIL-C-46168 shall be required.

Transportability. The taglines shall be capable of highway, rail, and marine transport.

Lifting and tiedown attachments. When specified, the taglines shall have lifting and tiedown attachments. Instructions for the use of the attachments or procedures shall be included on plates permanently affixed to the tablines.

Preparation for delivery. Prior to delivery, the taglines shall be serviced as required with lubricants for all moving parts. Means to lubricate these parts as required shall also be provided. Pressure lubrication fittings shall not be used where normal lubricating pressure may damage grease or or other parts. The taglines lubrication shall include filling tagline barrels when required by design. The tagline shall be conspicuously tagged to identify the lubricants and their temperature range. When specified, the tagline shall be lubricated with military lubricants and required military lubricants shall be as specified by the procurring activity.

Regulatory requirements. The contractor is encouraged to use recovered materials in accordance with Publication 94-580 to the maximum extent practicable. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials as distinguished from virgin raw materials. The component pieces and parts incorporated in the taglines may be newly fabricated from recovered

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

materials to the maximum extent practicable, provided the taglines produced meet all other requirements of this item description. Used, rebuilt or remanufactured components, pieces, and parts shall not be incorporated in the taglines.

Packaging and marking. Military packaging shall be specified when shipments are to overseas Department of Defense (DOD) consignees. Commercial packaging may be specified for shipment to the DOD consignees within the continental United States and the non-DOD consignees worldwide. When a supplier's normal packaging will satisfy the requirement for military packaging, it may be used.

Military Packaging. Taglines shall be preserved and packed to protect against physical damage and deterioration in a logistic environment characterized by the following:

1. Multiple handling during transportation and in-transit storage.
2. Shock, vibration, and static loading during worldwide shipment by all " transport modes.
3. Uncontrolled warehouse storage for extended periods.
4. Weather exposure during shipment and in-transit storage.
5. Stacking loads during shipment and storage.

Commercial packaging. Each tagline shall be prepared and packaged as applicable in accordance with the supplier's normal method for retail distribution. Shipping containers, when used, shall comply with the Uniform Freight and National Motor Freight Classification rules as applicable.

Marking for shippinf and storage. Unit, intermediate, and exterior packs shall be marked with the item nomenclature, stock or part number, quantity per pack, and contract number as a minimum; additional marking shall be as specified in the contract or order. Exterior packs shall have the complete consignees address. All marking shall be applied in a legible manner, in contrasting color, of an appropriate size and with waterproof materials.

Quality assurance. Each tagline shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

1. Design not as specified.
2. Size not as specified.
3. Wire roper reel, and fairleads not as specified.
4. Materials not as specified.
5. Treatment and painting not as specified.
6. Transportability not as specified.
7. Lifting and tiedown attachments not as specified.
8. Packaging and marking not as specified.

Certification of commercial item. The contractor shall certify that the product offered to the Government meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, manufacturer's current product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:04Z
Check the source to verify that this is the current version before use.

Notes The procuring agency should specify the preferred options permitted herein and include the following information in procurement document:

1. Title, number, and date of this item description.
2. Classification (size) required.
3. When treatment, painting, and paint color other than the manufacturer's standard is required.
4. When CARC coating is required.
5. When lifting and tiedown attachments are required.
6. When military packaging is required and specification of those requirements.
7. Certification that the model offered meets all requirements of this item description.
8. When this commercial item description is used for procurement, the commercial item certification clause must appear in the solicitation.
9. When commercial manuals with installation and operating instructions and parts list are required.
10. When a PIN number is required.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

Part or identifying number (PIN) . The PIN to be used for taglines acquired to this commercial item description are created as follows:

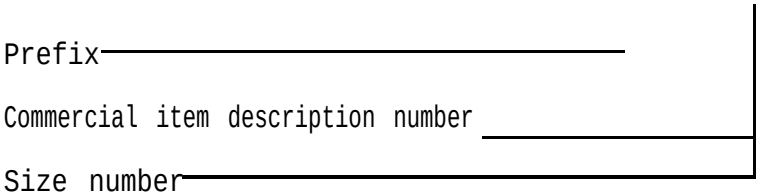

MIL-T-704, MIL-C-46168 and MIL-C-53039 are available from the Naval Publication and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

MILITARY INTERESTS:

Custodians:
Army-ME
Air Force - 99

Review Activities:
Army-AT
Air Force - 84
DIA-CS

User Activity:
Army-CE

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FCAE

PREPARING ACTIVITY:
Army-ME

Project 3815-0101

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T09:04Z
Check the source to verify that this is the current version before use.