INCH - POUND

A-A-52022B
04 December 2020
SUPERSEDING
A-A-52022A
02 December 2003

COMMERCIAL ITEM DESCRIPTION

REPAIR OUTFITS, COLLAPSIBLE TANKS AND DRUMS (ROCTAD)

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

1. SCOPE. This description covers a repair outfit used to repair cuts, abrasions, and punctures on collapsible fabric tanks, drums, and berm liners made of elastomer-coated fabrics.

2. CLASSIFICATION.

Type I - JP-8 & Diesel Fuel tank repair outfit
Type II - Type II has been deleted and incorporated into Type I
Type III - Water tank repair outfit

3. SALIENT CHARACTERISTICS.

3.1 General. Each repair outfit shall be equipped to repair two seven-inch cuts and four punctures up to one-half inch in diameter. The repair outfits shall form a repair that is resistant to JP-8 and diesel fuel for Type I and water for Type III. The repair outfit shall be capable of bonding to a coated fabric with any of the following coating materials: nitrile, polyester polyurethane, polyether polyurethane, and neoprene. The repair outfit shall be capable of repairing tank, drum and berm liner materials that have been unexposed and exposed to fuel (Type I) and water (Type III). Personnel wearing cold weather gloves or chemical protective gloves shall be capable of making a repair.

a. Type I: Cured repair shall not contaminate the JP-8 or diesel fuel stored in a repaired fuel container (see 7.2.3).

Comments, recommendations, additions, deletions, clarifications etc. and any data that may improve this document should be sent to U.S. Army Ground Vehicle System Center, ATTN: FCDD-GVS-SAT, MS #267, 6501 E. 11 Mile Road, Detroit Arsenal, MI 48397-5000 or emailed to usarmy.detroit.ccdc-gvsc.mbx.standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database at https://assist.dla.mil/.

AMSC N/A FSC 5430

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

b. Type III: Contractor shall certify that any substance released by a cured repair to 50 gallons of potable water to be below the EPA Maximum Contaminate Level when tested in accordance with National Sanitation Foundation (NSF) Standard 61 or equivalent (see 7.2.4).

3.2 Materials. If a two component adhesive is provided, it shall be delivered in pre-measured containers. The pre-measured containers shall enable the user to mix the proper proportions of each component to form the appropriate adhesive compound for Type I and Type III repair outfits.

3.3 Adhesive properties.

3.3.1 Cured repair patch for Type I repair outfit (JP-8 or Jet A). The peel adhesion between a cured repair patch and an aged coated fabric sample shall be 20 lbs/in. (9.1 kg/25 mm) minimum when tested in accordance with ASTM D413 (machine method, 180 degrees). A set of coated fabric samples shall be prepared for each of the four coating materials listed in 3.1. The coated fabric shall be a virgin sample that is aged by soaking in JP-8 conforming to MIL-DTL-83133 (see 7.2.3) or Jet A-1 for 14 days at 160 degrees Fahrenheit (°F) (71.1 degrees Celsius (°C)). The coated fabric surface shall then be cleaned and prepared according to the contractor's set of instructions before applying the repair patch. All four exposed edges of the test sample shall be protected from the fuel during soaking.

3.3.2 Cured repair patch for Type I repair outfit (diesel). The peel adhesion between a cured repair patch and an aged coated fabric sample shall be 20 lbs/in. (9.1 kg/25mm) minimum when tested in accordance with ASTM D413 (machine method, 180 degrees). A set of coated fabric samples shall be prepared for each of the four coating materials listed in 3.1. The coated fabric shall be a virgin sample which is contaminated by soaking in diesel fuel conforming to A-A-52557 (see 7.2.3) for 14 days at 160 °F (71.1 °C) and wiping dry. The coated fabric surface shall then be cleaned and prepared according to the contractor's set of instructions before applying the repair patch. All four exposed edges of the test sample shall be protected from the diesel fuel during soaking.

3.3.3 Cured repair patch for Type III repair outfit (water) The peel adhesion between a cured repair patch and an aged coated fabric sample shall be 20 lbs/in. (9.1 kg/25 mm) minimum when tested in accordance with ASTM D413 (machine method, 180 degrees). A set of coated fabric samples shall be prepared for each of the four coating materials listed in 3.1. The coated fabric shall be a virgin sample that is aged by soaking in distilled water for 14 days at 160 °F (71.1 °C). The coated fabric surface shall then be cleaned and prepared according to the contractor's set of instructions before applying the repair patch. All four exposed edges of the test sample shall be protected from the water during soaking.

3.4 Operating conditions. The repair outfit shall be capable of making a repair outdoors in dry weather between 40 °F (4.4 °C) and 80 °F (26.7 °C). A cured repair shall not leak when exposed to the following conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

a. Operational use of the tank, drum or berm liner at ambient temperatures from -25 °F (-31.7 °C) to +125 °F (+51.7 °C).
b. Folded storage of the equipment at ambient temperatures from -30 °F (-34.4 °C) to +160 °F (+71.1 °C).
c. Continuous contact with rainwater and ground water.

3.5 Components. Each repair outfit, Type I and III, shall be equipped with all the tools and materials required to make a repair. As a minimum, the repair outfit shall consist of the following:

a.	Patch - large (to repair a cut up to seven inches long)	2 each
b.	Patch - small (for puncture up to .5 in. diameter)	4 each
c.	Surface roughing tool	1 each
d.	Hand-held roller	1 each
e.	Adhesive (adequate supply for 6 patches)	6 each
f.	Stirring stick or spatula	2 each
g.	Protective gloves, disposable, large size	4 pair
h.	Adhesive applicator	2 each
i.	Resealable water resistant carrying case	1 each
j.	Set of instructions	1 each
k.	Degreaser/solvent cleaner with applicator	not less than 4 fl oz. (118.3 milliliters)
l.	Mixing bowl	2 each
m.	Razor knife	1 each

Note: Patches shall be compatible for use with fuel or water, as appropriate.

3.6 Set of instructions. Instructions shall be provided on a weather resistant card or in a weather resistant pouch. In addition to the manufacturer's set of instructions, the pot life of the adhesive compound shall be listed at 45 °F (7.2 °C), 72 °F (22.2 °C), and 90 °F (32.2 °C). Also, the cure time of a repair at 45 °F, 72 °F, and 90 °F shall be listed. Additionally, all safety warnings and Personal Protective Equipment (PPE) required to conduct the repair shall be included in the set of instructions.

3.7 Carrying case. All contents of each repair outfit shall fit into one resealable water-resistant carrying case. Color of the carrying case shall be non-reflective tan, black or other if approved by the contract officer. In addition to any special marking, each carrying case shall be permanently marked with the following information:

a. Repair Outfit for Collapsible Tanks and Drums, Type I or III
b. NSN: (or CAGE)
c. MFR/PN: (manufacturers reference/part number)
d. Contract No.:
e. Date of Manufacture:
f. Expiration Date:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

3.8 Shelf life. The entire contents of the kit will have a designated shelf life based on the lowest time period shelf life item included in the kit, which may include adhesive components. Storage conditions shall be specified in the MSDS. Minimum shelf life and storage conditions shall be specified in the contract or order.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).


5. PRODUCT CONFORMANCE PROVISIONS. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace (see 7.3). The Government reserves the right to require proof of such conformance.

5.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3).

7. NOTES.

7.1 Part or Identification Number (PIN). The following PIN (see 7.3) procedure is for Government purposes and does not constitute a requirement for the contractor. The PINs to be used for Repair Outfit Types, Collapsible Tanks and Drums (ROCTAD) acquired to this CID are created as follows: Example of reference part number: AA52022-1

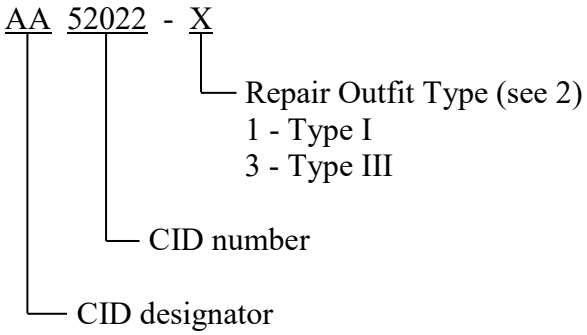

7.2 Source of documents.

7.2.1 Copies of the Code of Federal Regulations (CFR) are available online from www.gpoaccess.gov/cfr/index.html.

7.2.2 ASTM D413, "Standard Test Methods for Rubber Property - Adhesion to Flexible Substrate" is available online from www.astm.org.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

7.2.3 ASTM D975, “Standard Specification for Diesel Fuel” is available online from www.astm.org.

7.2.4 MIL-DTL-83133 “Turbine Fuel, Aviation, Kerosene Type, JP-8 (NATO F-34), NATO F-35, and JP-8+100 (NATO F-37)” are available from online at https://quicksearch.dla.mil.

7.2.5 NSF/ANSI Standard 61, “Drinking Water System Components – Health Effects”, is available online from www.nsf.org.

7.3 Ordering data. The contract or order should specify the following:

a. Title, number and date of this CID.
b. Product performance provisions (see 5).
c. Packaging requirements (see 6).
d. Date of manufacture and expiration date. (see 6 and 3.8)
e. Part or identification number (PIN) required (see 7.1).

7.4 Material safety data sheets (MSDS). Contracting officers should identify those activities requiring copies of MSDS’s prepared in accordance with FED-STD-313. The pertinent Government mailing addresses for submission of data are listed in FED-STD-313; and 29 CFR 1910.1200 requires that the MSDS for each hazardous chemical used in an operation must be readily available to personnel using the material. Contracting officers should identify the activities requiring copies of the MSDS.

7.5 Key words.

Cuts
Elastomers
Patches
Punctures

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - MC
Air Force - 184

Review Activities:
Army - MI
Air Force - 03
DLA - CC, GS, IS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 5430-2021-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.