PPP-P-0015D(GSA-FSS)
June 29, 1970
SUPERSEDING
Int. Fed. Spec. PPP-P-0015C(GSA-FSS)
March 4, 1968

INTERIM FEDERAL SPECIFICATION
PACKAGING AND PACKING OF STORAGE CABINETS, WARDROBES AND CLOTHING LOCKERS, METAL

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently avaiable technical information. It is recommended that Federal agencies use it for procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the packaging, packing, and marking requirements (see 6.1) for storage cabinets, storage and wardrobe cabinets, clothing lockers and wardrobe cabinets as covered by AA-C-0031 and AA-L-486.

1.2 Classification. This specification covers the packaging, packing and marking for levels A, B, and C for both "set-up" and "knocked-down" cabinets, lockers and wardrobes (see 6.2).

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-378	-	Plastic Sheet and Strip (Polyolefin).
AA-C-0031	-	Cabinets, Storage, Metal.
AA-L-486	-	Lockers, Clothing, Steel.
FF-N-105	-	Nails, Wire, Brads and Staples
QQ-S-781	-	Steel Strapping, Flat.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
PPP-B-20	-	Bags, Cotton, Mailing.
PPP-B-576	-	Boxes, Wood, Cleated, Veneer, Paper Overlaid.
PPP-B-585	-	Boxes, Wood, Wirebound.
PPP-B-591	-	Boxes, Fiberboard, Wood-Cleated.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Box, Fiberboard.
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-C-843	-	Cushioning, Material, Cellulosic.
PPP-F-320	-	Fiberboard Sheet Stock and Cut Shapes
PPP-P-291	-	Paperboard, Wrapping and Cushioning.
PPP-S-760	-	Strapping, Nonmetallic, (and Connectors).
PPP-T-42	-	Tape, Pressure-Sensitive Adhesive: (General Packaging Applications).
PPP-T-97	-	Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies)
Fed. Test Method Std. No. 101 - Preservation, Packaging and Packing Materials; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specification, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-731 - Quality of Wood Members for Containers and Pallets.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing, with Appropriate Test Methods.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part os this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606)

National Classification Board:

National Motor Freight Classification.

(Application for copies shall be addressed to the American Trucking Association, Inc., Attention: Tariff Order Section, 1616 P Street N. W., Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 General. All finished surfaces of the cabinet, locker, or wardrobe,which will be, or may come in contact with any part of the container in which it is being shipped, shall be protected from abrasion by cushioning material conforming to PPP-C-843 or PPP-P-291.

3.1.1 Material. Material used in the preservation, packaging, and packing shall be as specified herein and the applicable specifications. The material shall be free from all defects and imperfections which may affect the serviceability of the preservation, packaging, and packing.

3.1.2 Preservation (civil agencies). No further preservation is required. Metal surface treatments and finishes are covered in the commodity specification.

3.1.3 Preservation (military requirements).

3.1.3.1 Cleaning and drying. Each cabinet, locker, or wardrobe shall be cleaned process C-1 and thoroughly dried in accordance with MIL-P-116.

3.1.3.2 Application of preservative. Immediately after cleaning and drying, latches and other operational surface shall be preserved with type P-7 preservative. All other unprimed, unpainted, metal surfaces shall be coated with P-1 preservative. Preservatives used and methods of application shall be in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

3.1.4 Nails. All nails used in the construction of the wood assemblies described herein shall conform to FF-N-105, type II, style 7 (cement coated) or style 10 (helical design). The nails shall be 6 penny minimum and where applicable shall be clinched a minimum of 1/4 inch.

3.1.5 Staples. All staples used in the construction of the wood assemblies described herein shall conform to FF-N-105, type III, style 3, 16 gage (.0598 inch) and shall be 1-3/4 inches long with a 1/2 inch crown, or 1-1/2 inches long with a 7/16 inch crown. The staples shall be cement coated or chemically etched in accordance with the specification.

3.1.6 Lumber. All lumber used in the construction of the wood assemblies described herein shall conform to MIL-STD-731, class 2, using group I, II or III woods.

3.1.7 Strapping. The strapping specified herein shall conform to QQ-S-781, type I, class B, grade 2, not less than 5/8-inch by .015 inch or 1/2 inch by .020. At the option of the manufacturer, strapping conforming to PPP-S-760 may be used, providing that it meets the minimum strength requirements of the metal strapping specified herein.

3.1.8 Instruction Sheet. One set of assembly instructions, shall be placed in each individual unit package or sectional unit container (see 3.2).

3.2 Component Packaging (Knocked Down). The instruction sheet (see 3.1.8) shall be packaged in a kraft envelope. The assembly hardware (nuts, bolts, washers, clips, etc) shall be packaged in cotton draw-string bags conforming to PPP-B-20 or heat-sealed bags manufactured from material conforming to L-P-378, type I, grade A, finish 1, a minimum of 2 mils thick. The hardware (hooks, handles, hanger rods, etc.) shall be individually wrapped in kraft paper conforming to UU-P-268, grade B, with a basis weight of 40 pounds. The keys (and padlocks when furnished) shall be packaged in cotton draw-string bags or heat sealed bags manufactured from material conforming to L-P-378, type I, grade A, finish I, a minimum of 2 mils thick. The individual packages of hardware listed above shall subsequently be packaged in a single heat sealed bag manufactured from material conforming to L-P-378, type I, grade A, finish I, a minimum of 3 mils thick. The sealed bag shall then be placed in the center of a sheet of fiberboard conforming to PPP-F-320, class-domestic. This sheet shall be folded to form an envelope and placed in the shipping container. The cabinet, locker or wardrobe component parts (doors, sides, backs, tops, bottoms, shelves, etc.) shall be wrapped, or separated in a manner that will prevent parts from making contact with one another, utilizing kraft paper conforming to UU-P-268, grade B, with a basis weight of 40 pounds.

3.3 Packaging. Packaging shall be level A, B or C, knocked down (see 3.3.1) or set up (see 3.3.2), as specified (see 6.2).

3.3.1 Knocked down.

3.3.1.1 Level A. Individual cabinets, lockers or wardrobes. One complete knocked down cabinet, locker or wardrobe prepared as specified in 3.2 shall be packaged in a close-fitting box, conforming to PPP-B-636, style FPF, class weather-resistant, grade V3c, except that the weight and dimensional limitations of the box specification shall be waived. Close and seal boxes in accordance with the appendix to PPP-B-636. See 3.4.1.1.2 for method of packing wardrobe drawers and hardware.

3.3.1.2 Level B. Individual cabinets, lockers or wardrobes. One complete cabinet, locker, or wardrobe, prepared as specified in 3.2 shall be packaged as specified in 3.3.1.1 except that the fiberboard box shall conform to PPP-B-636, style FPF or FTC, type CF, class domestic, grade 275. When the FTC box is used each box shall be secured by one of the following methods: 4 straps conforming to the requirements of paragraph 3.1.7 or 4 strips of filament tape conforming to PPP-T-97, type II encompasing the entire periphery of the box. The outer straps or tape bands shall be positioned approximately 4 inches from each end. The 2 inner straps or tape bands shall be positioned in a manner that will divide the remaining container into 3 equidistant parts. When the tape option is exercised, each strip of tape shall be overlapped on itself a minimum of six inches.

3.3.1.3 Level C. Individual cabinets, lockers or wardrobes. One complete knocked down cabinet, locker or wardrobe shall be packaged in accordance with the manufacturers standard practice, providing it insures protection of the cabinet, locker or wardrobe during shipment and safe delivery to its destination.

3.3.2 Set up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

3.3.2.1 Levels A and B. Each set up cabinet, locker or wardrobe shall be completely assembled, ready for use. All shelves, coat rods, hooks, etc., shall be secured by suitably designed interior forms, retaining clips or bolts to prevent movement during shipment, storage and reshipment. The keys (and padlocks when furnished) shall be packaged in cotton draw string bags or heat sealed bags manufactured from material conforming to L-P-378, type I, grade A, finish 1, a minimum of 3 mils thick. The key package shall then be secured to the inside of one of the doors, utilizing adhesive tape, conforming to PPP-T-42. If doors are secured in a closed position by means of metal clips or if doors are secured in a closed position by locking, the key package shall be secured to, or adjacent to the door handle. Alternatively the shelves for the wardrobe may be packaged separately in a fiberboard box, constructed from material conforming to PPP-F-320, type CF, class-domestic, grade 275. Close and seal box in accordance with the appendix to PPP-B-636,. This box shall be suitably secured within the shipping container, where space permits.

3.3.2.2 Level C. Each set up cabinet, locker, or wardrobe shall be packaged in accordance with the manufacturers standard practice, providing it insures protection of the cabinet, locker or wardrobe and delivery to its destination.

3.4 Packing. Packing shall be level A, B, or C, knocked-down (see 3.4.1) or set-up (see 3.4.2), as specified (see 6.2). The complete pack shall meet the test requirements specified in section 4 of this specification.

3.4.1 Knocked down.

3.4.1.1 Level A.

3.4.1.1.1 Cabinets and lockers. One complete knocked-down cabinet or locker, including instruction sheet and hardware, packaged as specified in 3.3.1.1 shall be packed in a close-fitting box conforming to PPP-B-576, style A or B, class 2, type 3 load; PPP-B-585, style 1, class 3, type 3 load; PPP-B-591, class II, style 3 load; PPP-B-601, overseas type, style A or B; PPP-B-621, class 2, style 2 or 4, type 3 load; PPP-B-636, style FTC, class weather-resistant, grade V3s; or PPP-B-640, class 2, style optional. Alternatively, each knocked-down unit, packaged as specified in 3.4.2 shall be packed in a crate designed and constructed as shown in Figure 1. The lumber shall conform to 3.1.6 and shall be a minimum of one inch thick (nominal), by the height of the closed package for the longitudinal and end members and 1/2 by 6 inch thick (nominal) for the top and bottom cross members. The longitudinal members shall be on the outside and secured to the end members with a minimum of 3 nails (see 3.1.4) at each of the 4 corners of the skid. At the option of the manufacturer, two staples (see 3.1.5) may be used at each corner in lieu of the nails. Staples shall be driven perpendicular to the wood grain except where side nailing the cross-members to the end members. The cross members shall be nailed or stapled to the longitodinal members with a minimum of 3 nails or staples (see 3.1.4 or 3.1.5 as applicable). The end cross members shall be nailed or stapled (see 3.1.4 or 3.1.5 as applicable) to the end members with a minimum of 3 nails or staples equally spaced along the end members. In all cases the nails or staples shall not visibly split the wood members. The fiberboard containers shall be closed and waterproof sealed in accordance with the appendix to PPP-B-636. All containers shall be strapped with a minimum of 3 straps (see 3.1.7) located approximately as shown in Figure 1.

3.4.1.1.2 Wardrobes. Wardrobes packaged as specified in 3.3.1 shall be packed in two close-fitting boxes as follows: The container for the drawers and hardware shall conform to PPP-B-636, type CF, class weather-resistant, variety SW, grade W5c, style FOL. The container for packing the various panels and other components shall be fabricated in accordance with Figure 2, except that the material for the body and part "A" shall conform to PPP-F-320, type CF, class weather-resistant, variety SW, grade W5c. The drawers and panel components shall be assembled and packed as illustrated in Figure 2A. Double-doors shall be assembled to the door frame. Panels, doors, shelves, drawers, etc., shall be completely separated from each other by the use of sheets of nonabrasive paper or fiberboard to prevent abrasion to the finished metal surfaces. All voids within the container shall be filled with die-cut or scored and folded pads specifically designed for the purpose. The material shall conform to PPP-F-320, type CF, class domestic, varieyt SW, grade 200 minimum. The two-piece container for the packed panel components shall be closed by folding the two sides of the body up and over the top pad (part "A") and the two end flaps are then folded up and over part "A". Alternatively, the assembled panels and components may be packed in a close-fitting box conforming to PPP-B-636, style FTC, type CF, class weather-resistant, variety SW, grade W5c, except that the contents weight limitation is waived. When the FTC box is utilized, part "A" may be omitted. Close and seal the container in accordance with the appendix to PPP-B-636. The closed and sealed container (either option) shall be further reinforced with a wood frame as shown in Figure 1. All lumber used shall conform to paragraph 3.1.6, the lumber for the longitudinal and end members shall be one-inch thick nominal, dressed on one side, with the width equal to the height of the closed and sealed container. The longitudinal members shall be fastened to the end members as shown, using nails as specified in 3.1.4 or staples as specified in 3.1.5. The nails shall be 8 penny minimum size. The top and bottom cross members shall be nominal 1/2 inch by 6 inch boards and shall be nailed or stapled to the longitudinal members, as shown, using a minimum of 3 eight penny nails or 2 staples at each board. Additionally, the end cross-members shall be attached to the end members with a minimum of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

3 nails or 2 staples equally spaced along the long dimension (4 places). The completed package shall be reinforced with 3 straps located as shown in Figure 1. The strapping shall conform to the requirements of 3.1.7.

3.4.1.2 Level B.

3.4.1.2.1 Cabinets and lockers. Each knocked down cabinet or locker packaged as specified in 3.3.1.2 shall be further reinforced and protected with an exterior wood frame designed as illustrated in Figure 1 and described in paragraph 3.4.1.1.1.

3.4.1.2.2 Wardrobes. Wardrobes, packaged as specified in 3.2.1 shall be packed as specified in 3.3.1.2, except that the material for the fiberboard boxes used shall conform to PPP-B-636, type CF, class domestic, variety SW, grade 275 (minimum).

3.4.1.3 Level C. Cabinets, lockers and wardrobes packaged as specified in 3.3.1.3 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification or the National Motor Freight Classification.

3.4.2 Set up.

3.4.2.1 Level A. Each set-up cabinet, locker or wardrobe packaged as specified in 3.3.2.1 shall be packed in a close-fitting box conforming to PPP-B-576, style A or B, class 2, type 3 load; PPP-B-585, class 2, style 1, 2 or 2A, type 2 load; PPP-B-591, class II, style optional; PPP-B-601, overseas type, style optional or PPP-B-640, class 2, style optional. The contents of each shipping container shall be cushioned, blocked, braced and waterproofed with a full-height shroud, in accordance with MIL-STD-1186. Additionally, units with legs shall be provided with a minimum of 3/4 inch clearance between the bottom of the legs and the interior surface of the bottom of the shipping container. Each shipping container shall be closed, sealed when applicable, and strapped in accordance with the appendix to the applicable box specification.

3.4.2.2 Level B. Each set up cabinet, locker or wardrobe packaged as specified in paragraph 3.3.2.1 shall be enclosed in a close-fitting fiberboard wrap around container constructed as shown in Figure 6. The wrap around container shall be secured in place by means of top and bottom caps designed as shown in Figure 5. The inside dimensions of these caps shall be such as to provide a close fit over the ends of the wrap around. The wrap around container and top and bottom caps shall be constructed from material conforming to PPP-F-320, type CF, class-domestic, variety SW, grade 275. The edges of the cabinet, locker or wardrobe shall be protected by the use of clearance pads fabricated from built up fiberboard or other material acceptable to the Government for this purpose. These pads shall be secured to the inner surfaces of the wrap-around container. Any protrusions such as handles shall be cushioned to prevent damage to the container or the contents. Units equipped with legs shall be provided with a wood-base platform fabricated from nominal 1 by 3 inch lumber (see paragraph 3.1.6), to immobilize and protect the legs. The two longer boards shall be placed under the legs, while two short members shall fit snugly against the inner edges of the legs. The cabinet, locker or wardrobe shall be further protected by an open wood crate constructed in accordance with Figure 4. All wood members (see paragraph 3.1.6) shall be nominal 1 by 4 inch, except the cross members, which shall be nominal 1 by 6 inch pieces. All boards shall be secured in their proper positions using nails as described in 3.1.4 or staples as described in 3.1.5. Each container shall be further reinforced with strapping as specified in 3.1.7.

3.4.2.3 Level C. Each set up cabinet, locker or wardrobe, prepared as specified in 3.3.2.2 shall be packed in containers that will assure carrier acceptance and safe arrival of destination in compliance with the Uniform Freight Classification or the National Motor Freight Classification.

3.5 Marking. The marking shall be as specified in 3.5.1 or 3.5.2, as specified (see 6.2).

3.5.1 Civil agencies. In addition to the special markings required by paragraph 3.5.3, the shipping containers for the cabinets, lockers and wardrobes shall be marked in accordance with Fed. Std. No. 123.

3.5.2 Military agencies. In addition to the special markings required by paragraph 3.5.3, the shipping containers for the cabinets, lockers and wardrobes shall be marked in accordance with MIL-STD-129.

3.5.3 Special marking. In addition to the markings required by 3.5.1 or 3.5.2 each shipping container for the set-up cabinets, lockers or wardrobes shall be marked on at least one side panel in accordance with the carrier rules and regulations at the time of shipment, and at a point approximately 4 to 8 inches down from the top of the pack on all four sides, each container shall be marked in each corner, with the work "UP" and an arrow pointing to the top of the container. The words "UP" shall be in characters a minimum of 2 inches high. Additionally, the tops of all the containers (set up and knocked down) shall also be marked as follows in characters a minimum of 2 inches high:

FURNITURE
FRAGILE-HANDLE WITH CARE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

3.6 Palletization.

3.6.1 Knocked down cabinets, lockers, and wardrobes. Unless otherwise specified, ten shipping containers for the knocked down cabinets, lockers or wardrobes (less drawers) shall be placed on a pallet as shown in Figure 7. The design of the pallet shall be as shown in Figure 9. The containers shall be placed on the pallet in a single stack and secured with three straps located in the girthwise direction as follows: one strap shall be located approximately 12 inches from each end and the third shall be located approximately on center. The strapping shall be in accordance with paragraph 3.1.7. Preformed edge protectors, metal or plastic, shall be used at the top to prevent damage to the containers.

3.6.2 Wardrobe drawers. Unless otherwise specified, ten shipping containers for the drawers for the wardrobe shall be placed on a pallet as shown in Figure 8. The design of the pallet shall be as shown in Figure 10. The containers shall be placed on the pallet in two stacks of five each and secured with three straps located as follows: one strap shall be located approximately 18 inches from each end in the girthwise direction and the third strap shall be located approximately on center in the lengthwise direction. The strapping shall be in accordance with paragraph 3.1.7. Preformed edge protectors, metal or plastic, shall be used at the top to prevent damage to the containers.

3.7 Preproduction samples. When specified by the contract or purchase order, see 6.2,the contractor shall provide a complete pack with item completely assembled for shipment, for examination and determination of compliance with this specification by the Government representative.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsibile for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that packaging and packing materials were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with the specification.

4.2 Testing of end item.

4.2.1 Test report. The tests specified herein are intended to determine compliance with the requirement for level A, B, or C packing and shall be required on one model identical to the item being packed for each level of packing specified in the contract or order. A test reported, indicating no damage to the test item and no functional damage to the container and packing, will be accepted as proof of compliance for the level of packing specified in the contract or order when made available to the inspection service. The test results shall be obtained from tests conducted on an item of the identical model specified in the contract or order. Test reports, obtained as a result of tests conducted within 12 months prior to date of contract or order, shall contain a complete description of the packaging, packing, materials, and items packed, including drawings and pictures as needed. A packed item, tested after date of contract or order, shall be made available for identification by the Government representative and remain at the contractors plant until the last shipment on the contract is made. This unit shall be used as a guide in determining that packed items furnished on the contract conform to the sample unit tested and accepted. At the option of the Government the tests shall be witnessed by, or conducted under the supervision of a Government Inspector.

4.2.2 Testing costs. All products, or containers damaged in making these tests shall be at the expense of the contractor or manufacturer.

4.3 Examination after testing. After the specified tests, for levels A, B or C in paragraphs 3.4.1 or 3.4.2 have been accomplished, a visual examination shall be made of the shipping containers and its contents. Any damage to the contents or functional damage to the container or packing shall be cause for rejection. Structural damage to the container, which would result in either loss of the contents or failure of the container in subsequent handling, is cause for rejection. Substantial shifting of contents with the container, that would reated conditions likely to cause damage during shipment, storage, and reshipment, will also be cause for rejection. Minor container damage, such as chipping, abrasion, and superficial splitting of wood members and punctures of container panels, will not be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

4.4 Tests.

4.4.1 Weight. The following tests cover procedures for preshipment testing of packed cabinets, lockers or wardrobes weighing 100- to 500-pounds. A test cycle in the order herein specified shall consist of all the tests required for a specific shipment.

4.4.1.1 Vibration test. A packed cabinet, locker or wardrobe shall be tested in accordance with Method 5019 of Fed. Test Method Std. No. 101. The duration of the test shall be as follows for the level of pack specified

Level A Pack - 2 hours.
Level B Pack - 1 hour.
Level C Pack - Not required.

4.4.1.2 Incline-Impact Test. A packed cabinet, locker or wardrobe shall be tested in accordance with method 5023 of Fed. Test Method Std. No. 101. The optional timber shown in Figure 1 of the test method shall not be used. The impact velocity shall be 11.8 feet per second. An impact test cycle shall consist of one impact of each of the six faces of the pack and the number of cycles that constitute a complete test shall be as follows for the level of pack specified:

Level A Pack - 2 cycles.
Level B Pack - 1 cycle.
Level C Pack - Not required.

4.4.1.3 Compression tests. This test shall be used to determine the ability of the shipping container and inside packing material to provide sufficient protection to its contents when subjected to loads simulating those imposed by stacking.

4.4.1.3.1 Test equipment. The test may be performed on a standard compression machine; or by applying a superimposed load to the top of the specimen container.

4.4.1.3.2 Test procedures. The specimen packed cabinet, locker or wardrobe shall be placed in its shipping position, on a flat, level rigid floor; and the prescribed load applied, or on the center of the bottom platen of the testing machine and the prescribed load applied. The test shall last for one (1) hour and the cabinet, locker or wardrobe shall be capable of withstanding the prescribed load without damage as determined by paragraph 4.3. The compression load is determined by the following formula:

$$\text{Compression Load (Pounds)} = A \times \frac{B-C}{C} \times D$$

A - Weight of loaded container.
B - Allowed stacking height - 15 foot minimum.
C - Height of container.
D - Safety factor.
For level A pack, D = 3.50
For level B pack, D = 2.00
For level C pack, - Not required.

5. PREPARATION FOR DELIVERY.

5.1 Not applicable.


6. NOTES

6.1 Intended use. This specification covers the packaging, packing and marking requirements, and the preshipment performance type testing for cabinets, lockers and wardrobes. It is intended for application to assembly line mass produced products.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in the procurement documents:

(a) Title, number and date of this specification.
(b) If cabinets, lockers or wardrobes are to be set up or knocked down (see 3.3 and 3.4).
(c) When preproduction samples are required (see 3.7)
(d) Level of packaging (see 3.3).
(e) Level of packing (see 3.4).
(f) Marking requirements (see 3.5).
(g) Palletization requirements (see 3.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

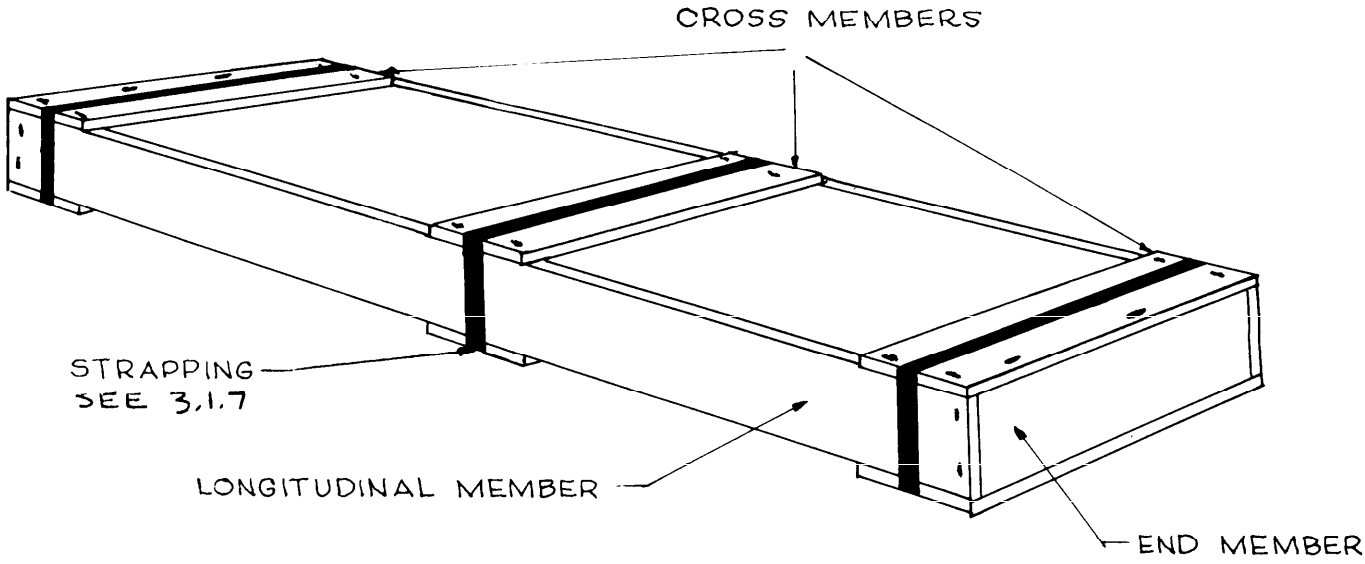

KNOCKED DOWN CABINET OR LOCKER PACK - SEE 3.4.1

FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.



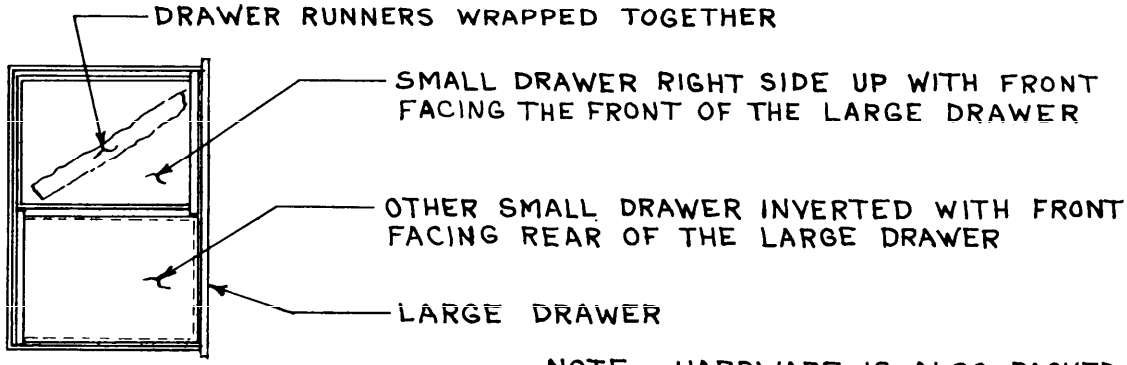


FIG. 2-A
METHOD OF PACKING DRAWERS

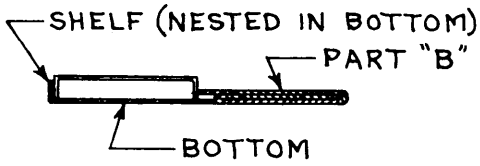

VIEW SHOWING LOCATION OF PART "B"

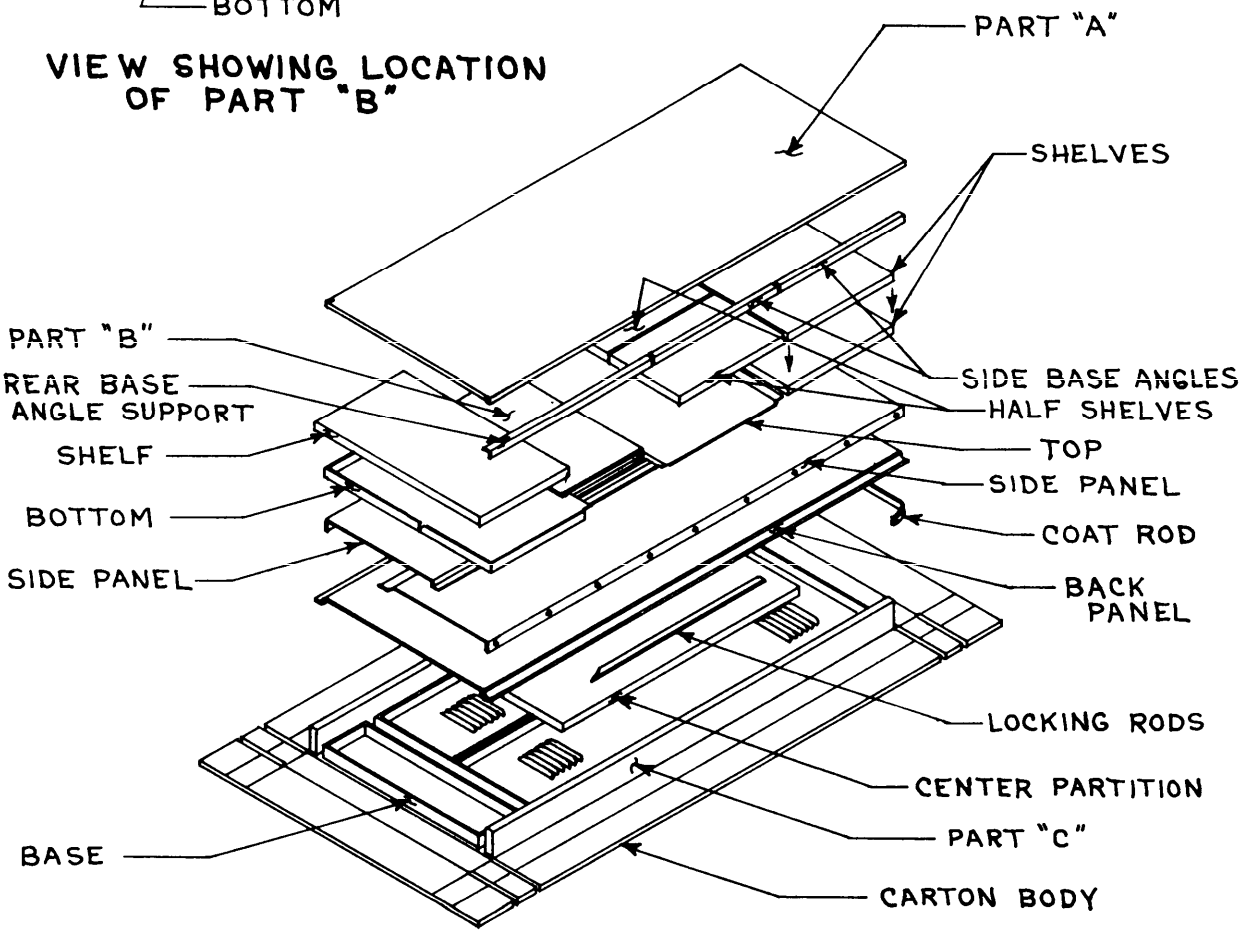

PACKING ASSEMBLY OF THE WARDROBE
(SEE FIG. 3 FOR DETAILS)

FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

NOT TO SCALE - ALL DIMENSIONS APPROX.

WARDROBE WIDTH	"A"	"B"	"C"
30"	46¼"	30½"	30"
36"	52¼"	36½"	36"

PART "A" - FIBERBOARD, TY CF, CL. DOMESTIC
VAR. SW, GR. 200 (1-REQ'D)


PART "C" - FIBERBOARD, TY CF, CL. DOMESTIC
VAR. TW, GR. 1100; OR NOM. 1"
THICK SOFTWOOD, (2 REQ'D)
(WIDTH TO EQUAL INSIDE DEPTH OF CONTAINER)

BODY - FIBERBOARD, TY CF, CL. DOMESTIC
VAR. SW, GR. 275. (1-REQ'D)

PART "B" - NON TEST D/W B/C FLUTE (1 REQ'D)

FIG. 3

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the currentversion before use.

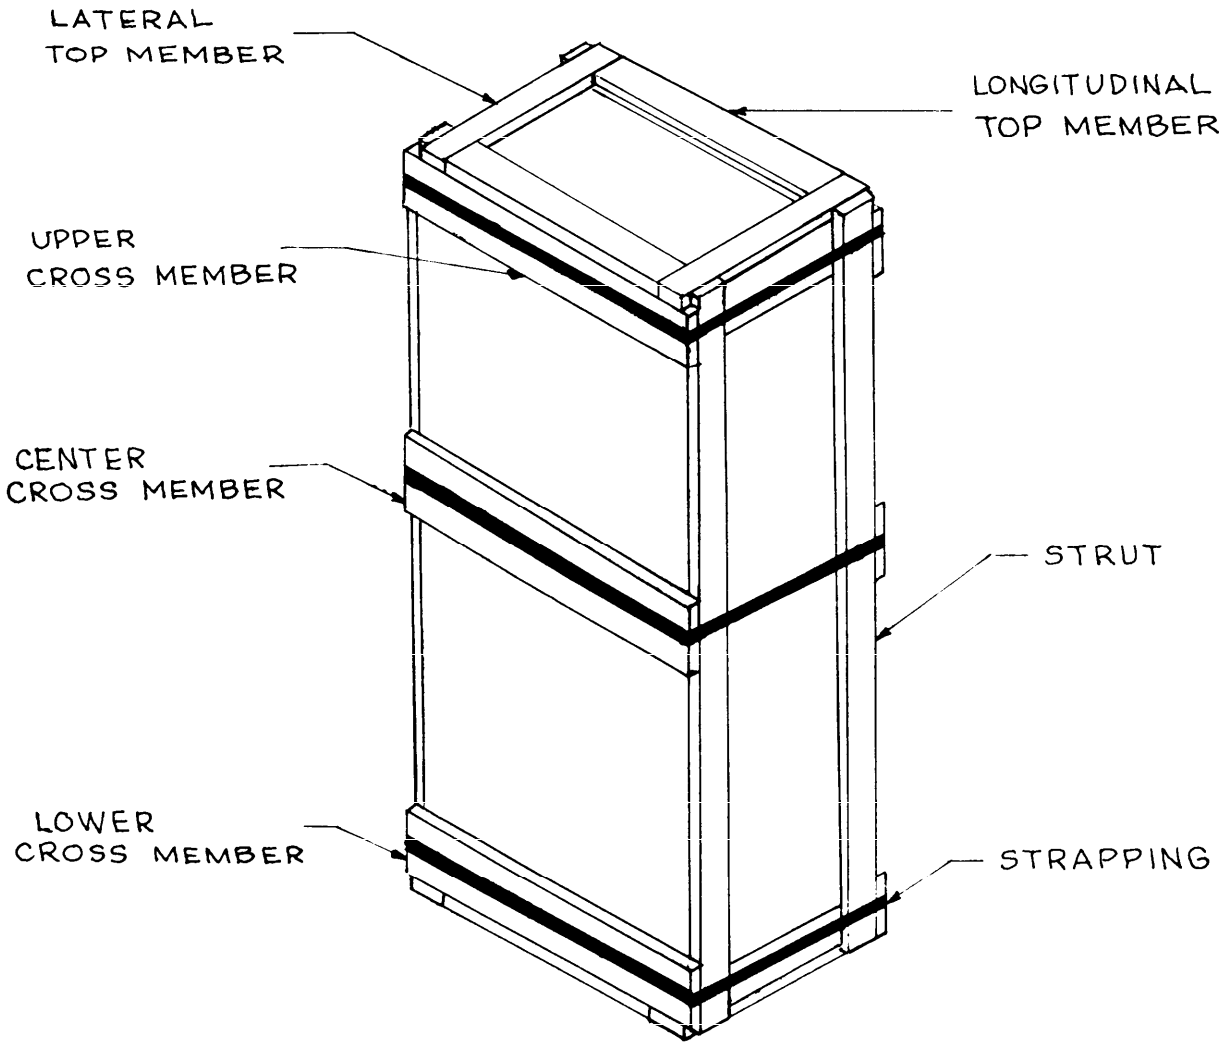

METHOD OF PACKING CABINETS LOCKERS & WARDROBES - SET-UP

FIG. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

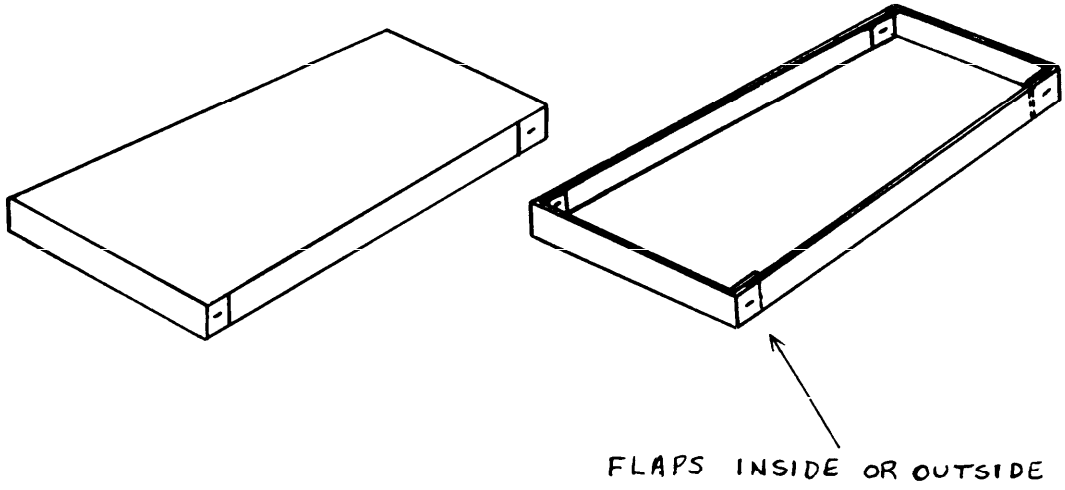


FIG. 5

TOP & BOTTOM CAPS
SEE 3.4.2.2

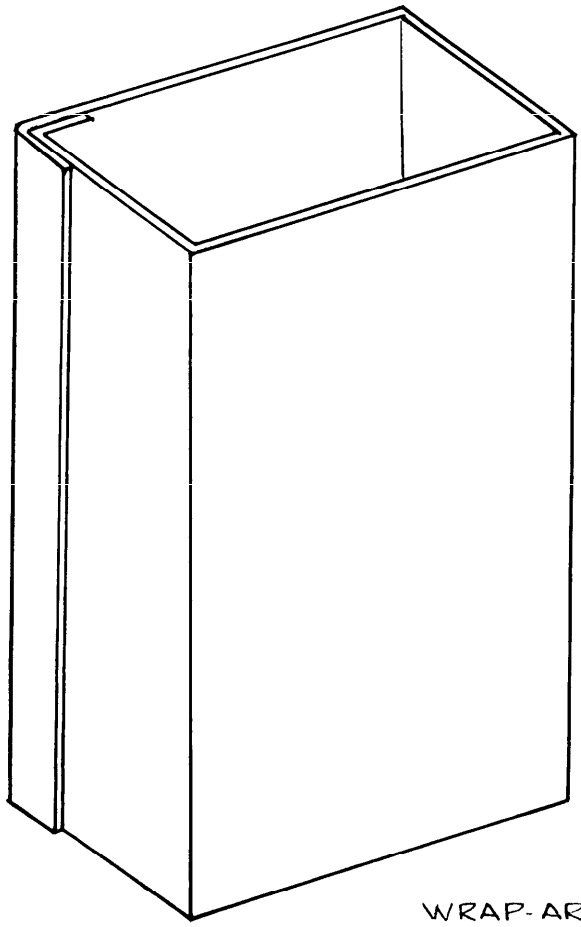


FIG. 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

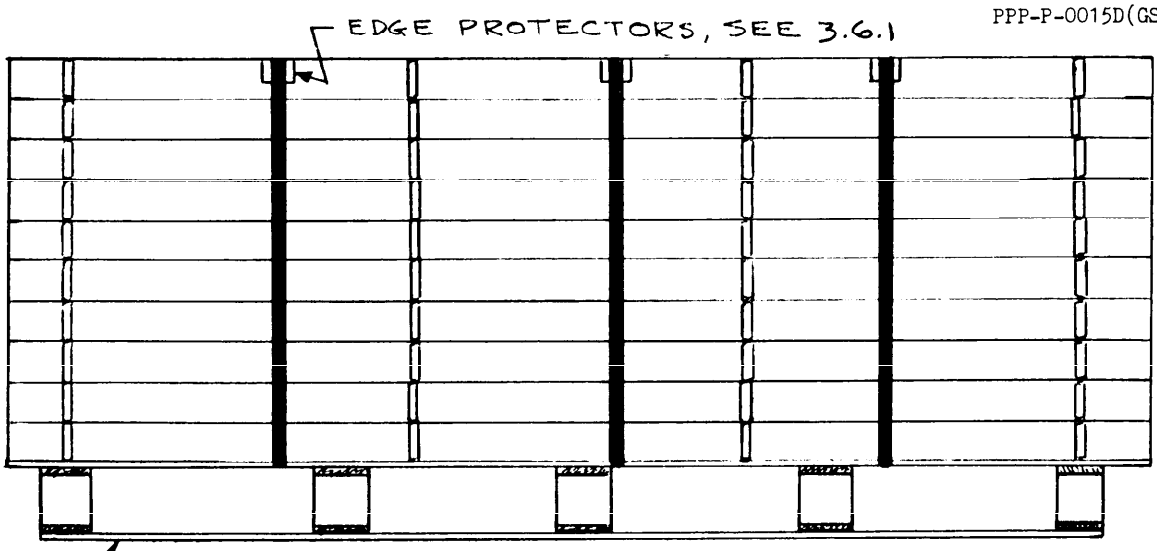


FIG. 7 - METHOD OF PALLETIZING KNOCKED-DOWN PACKS

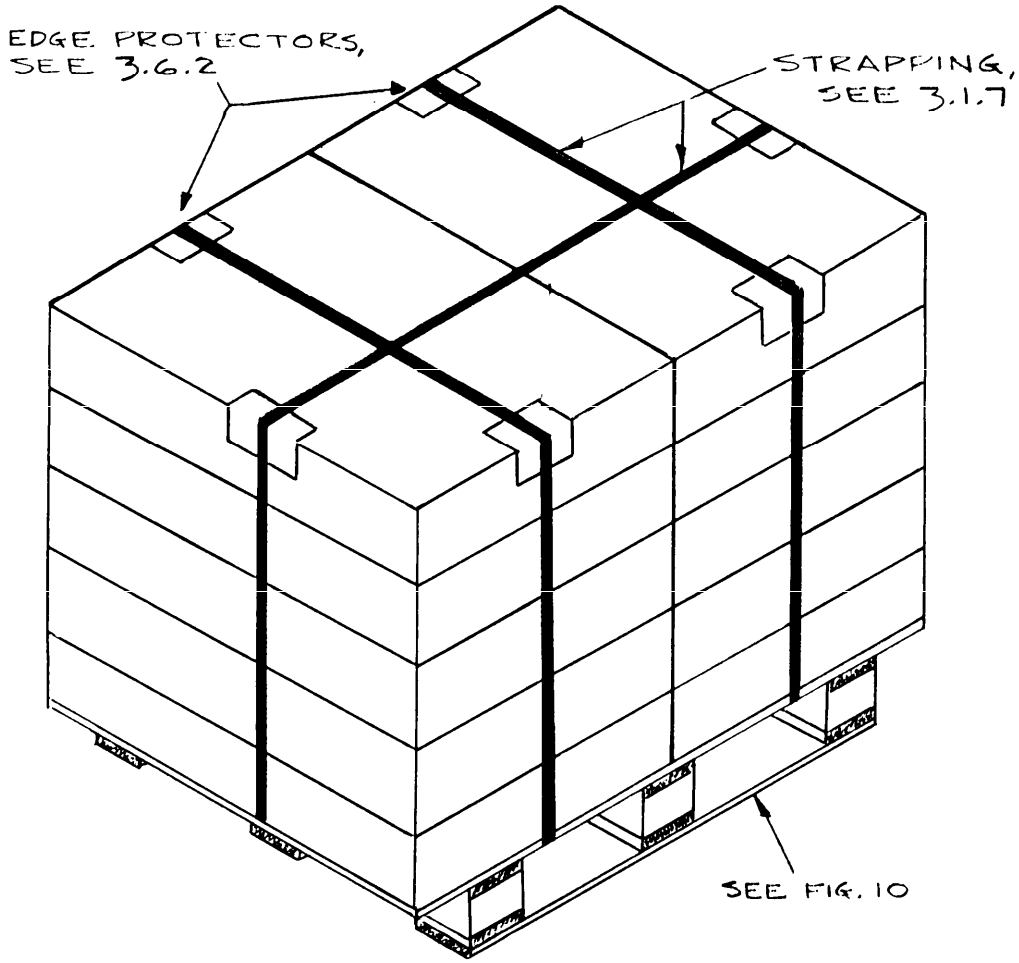


FIG. 8 - METHOD OF PALLETIZING WARDROBE DRAWER PACKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

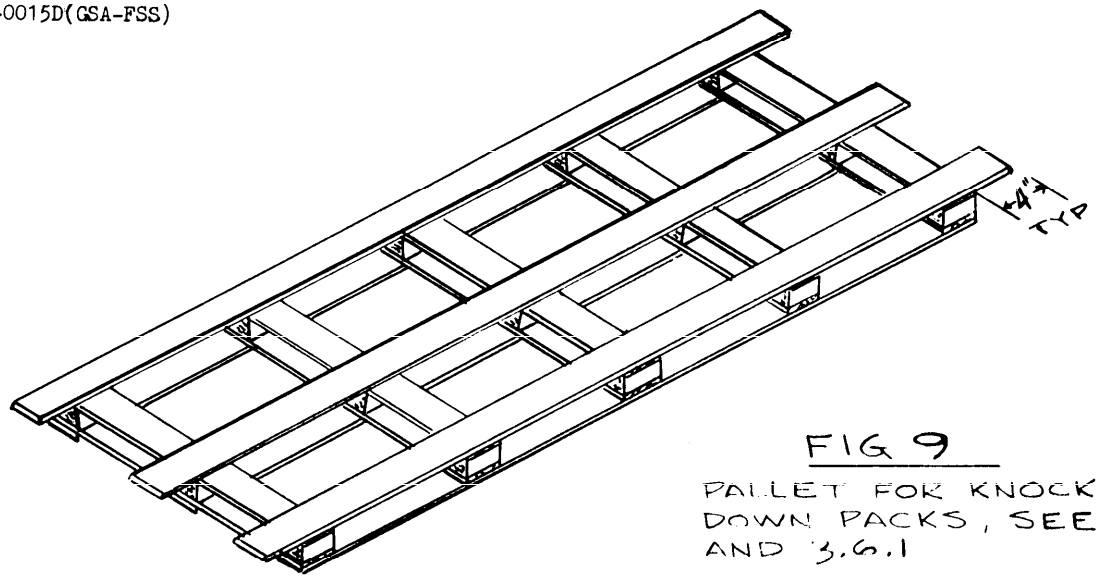
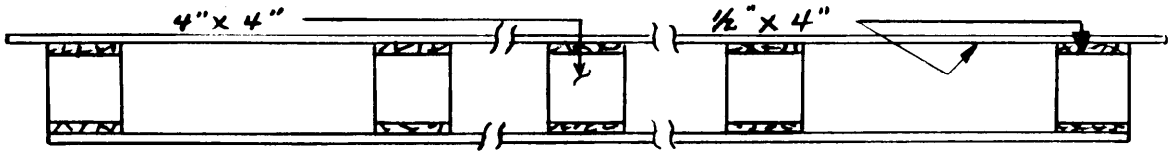


FIG 9

PALLET FOR KNOCKED-DOWN PACKS, SEE FIG.7 AND 3.6.1



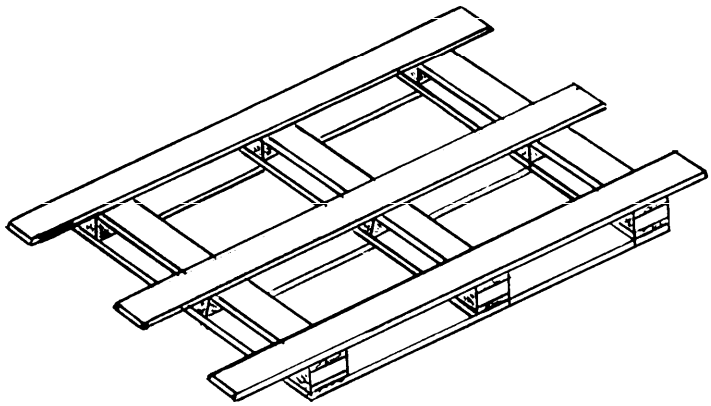


FIG. 10

PALLET FOR WARDROBE DRAWER PACKS, SEE FIG.8 AND 3.6.2

GSA DC 71-771

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:49Z
Check the source to verify that this is the currentversion before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSX), Washington, D.C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION PPP-P-0015D(GSA-FSS) Packaging and Packing of Storage Cabinets, Wardrobes and Clothing Lockers, Metal

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.