MILITARY SPECIFICATION

TRANSISTOR, PNP, GERMANIUM
TYPES 2N499 AND 2N499A

This amendment forms a part of Military Specification MIL-S-19500/72C(EL) 1/, dated 2 August 1967, and is approved for use by Army Electronics Research and Development Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* 1.4, h_{fe} Max limits column, 2N499A: Delete "80" and substitute "100".

PAGE 3

* 3.4, lines 2, 3, and 4: Delete "Tables I, II, and III" and substitute "Table I" (two places).

* 4.2, delete and substitute:

"4.2 Qualification and acceptance inspection. Qualification inspection is not required. Acceptance inspection shall consist of the examinations and tests specified in table I on a 100 percent basis."

* 4.2.1, 4.2.2, and 4.2.3: Delete in their entirety.

PAGE 4

* 4.2.4: Delete in its entirety.

PAGE 5

* TABLE I, LTPD column: Delete.

* TABLE I, Subgroup 3, Test method 3206, Max limits column, 2N499A: Delete "80" and substitute "100".

* TABLE I, Subgroup 3, Test method 3256, Conditions column, last line: Delete "Fig. 2 herein" and substitute "Fig. 2, or equivalent."

PAGE 6

* TABLE I, LTPD column: Delete.

PAGES 7, 8, 9, AND 10

* TABLES II and III: Delete in their entirety.

PAGE 11

FIGURE 1: Delete and substitute new figure 1 as printed on page 3 of this amendment.

1/ For FSC 5961, Army EL is now ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:07Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army - ER


Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5961-A819-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:07Z
Check the source to verify that this is the current version before use.

LTR	DIMENSIONS				NOTES
	INCHES		MILLIMETERS		
	MIN	MAX	MIN	MAX	
A	.200	.240	5.08	6.10	
B	.155	.180	3.94	4.57	
C	.375	.410	9.58	10.41	
D	1.500	1.750	38.10	44.45	
E	---	.105	---	2.67	2
F	.017	.019	.43	.48	3
G	.007	.025	.18	.64	4
H	.028	.048	.71	1.22	4
J	.028	.042	.71	1.07	4
K	45° NOM				
L	90° NOM				
M	.071 NOM		1.80 NOM		

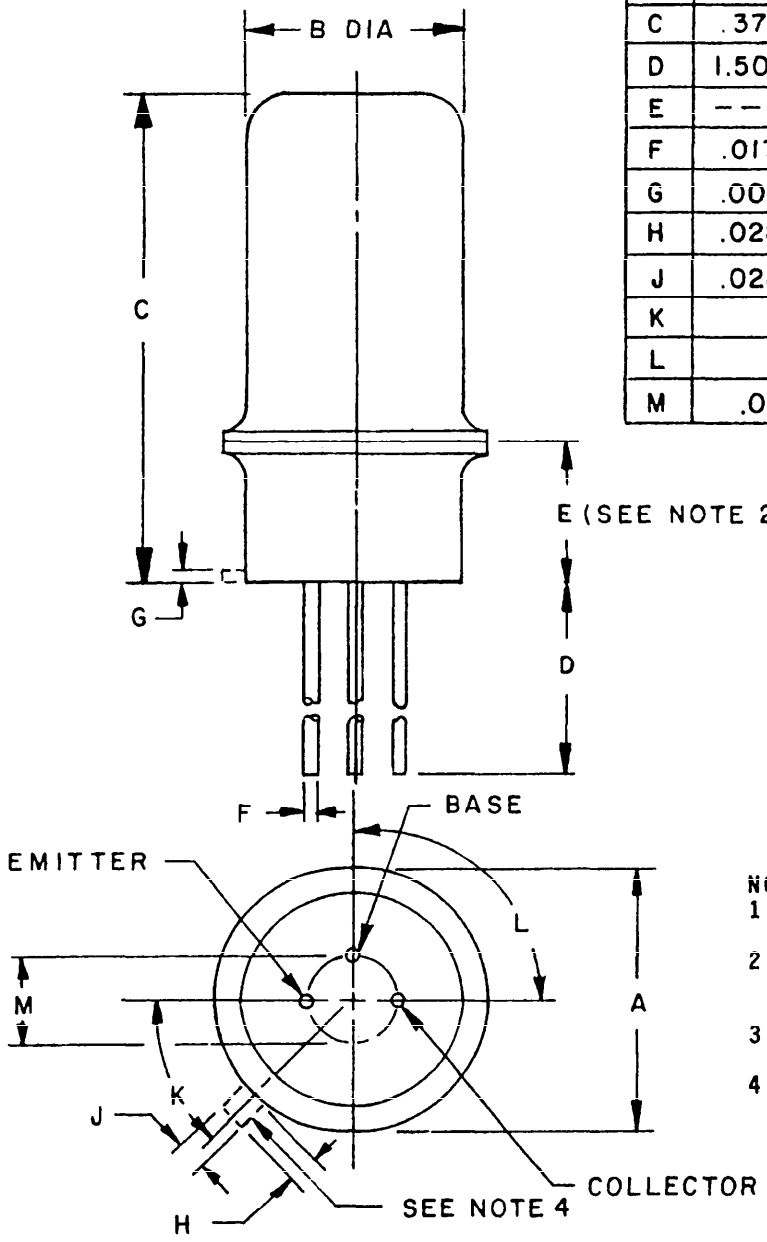

NOTES:
1. All dimensions in inches, unless otherwise specified.
2. Flange position not controlled within this range.
3. All leads electrically isolated from case.
4. Keyway tab optional.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:07Z
Check the source to verify that this is the current version before use.