[METRIC]

A-A-403C
November 03, 1994
SUPERSEDING
A-A-403B
September 20,1988

COMMERCIAL ITEM DESCRIPTION

BINDER CLIP

The General Services Administration has authorized the use of this Commercial Item Description, for all Federal agencies.

1. SCOPE:

This Commercial Item Description covers the requirements for three sizes of spring type binder clips.

2. Classification. Each Binder Clip shall be defined by size (See 7A).

Size	
Small	1.91cm (3/4 inch wide)
Medium	3.18cm (1-1/4 inches wide)
Large	5.08cm (2 inches wide)

1. Salient Characteristics

The clips shall have two wire handles attached to the spring clip body. The handles shall be designed for opening and hanging the clip. The handles shall have the following capabilities: To be placed flat against the paper surface, and to be movable to an upright position and securely stowed. The handles shall not become detached during normal use.

Beneficial comments, recommendations additions,deletions, clarification, ect. and any other data which may improve this document should be sent to: General Services Administration, Engineering Division (2FYEE), Rm. 20-130, 26 Federal Plaza NEW YORK , NY 10278

FSC 7510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

The spring clip body shall be made from uniform, cold-rolled spring steel of suitable quality to meet the opening pressure and one-sheet holding capacity of table II without fracture or permanent deformation. The clips shall be required to hold a quantity of paper of 0.127cm (0.005 inches) thickness up to and including the maximum capacity as stated in Table II. Each clip handle shall be made from suitable hard-drawn wire that will retain its original rigidity and shape while in use.

All surfaces of the clip shall have a protective finish in accordance with normal commercial practice. Dimensions and tolerances shall be as stated in Table I.

Workmanship. The finished binder clip shall exhibit no evidence of jagged or rough areas. The clips shall be free from burrs, sharp or rough edges, or other defects which may injure the user or damage paper. The binder clip shall be free from defects which may affect its serviceability, durability or appearance.

Performance testing.

A. Holding test. Clip shall be suspended by one handle. The top of a sheet of paper having a thickness of not more than 0.127 mm (0.005 inch) for small and medium clips and 0.254 mm (0.010 inch) for large clips shall be inserted between the jaws of the binder clip and shall not slip when holding a dead weight attached to the bottom of the sheet, as specified, in Table II.

B. Opening test. Pressure shall be applied to the ends of the handles until the jaws are opened to half of the maximum capacity specified. Clips shall be considered to have failed if pressures greater than or less than that specified in Table II are required.

3. Quality Assurance Provisions

A. Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the government. The Government reserves the right to perform any of the inspections set forth in the Commercial Item Description, where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

2.TABLES AND TESTS

TABLE I

SPRING CLIP BODY cm /(inches)

SIZE	METAL THICKNESS	LENGTH A	HEIGHT B	WIDTH C
Small	0.279 ± 0.025 mm 0.011 ± 0.001 IN.	1.91 ± 0.079 cm 3/4 ± 1/32 IN.	1.11 ± 0.079cm 7/16 ± 1/32 IN.	0.873 ± 0.079 cm 11/32 ± 1/32 IN.
Medium	0.0406 ± 0.025 mm 0.016 ± 0.001 IN.	3.18 ± 0.160 cm 1-1/4 ± 1/16 IN.	1.91 ± 0.079 cm 3/4 ± 1/32 IN.	1.59 ± 0.160 cm 5/8 ± 1/16 IN.
Large	0.533 ± 0.051 mm 0.021 ± 0.002 IN.	5.08 ± 0.160 cm 2 ± 1/16 IN.	3.18 ± 0.079 cm 1-1/4 ± 1/32 IN.	2.70 ± 0.160 cm 1-1/16 ± 1/16 IN.

CLIP HANDLES cm / (inches)

SIZE	L (minimum)	WIRE DIAMETER
Small	2.54 cm (1 IN.)	1.37 ± 0.051 mm (0.054 ± 0.002 IN.)
Medium	3.81 cm (1-1/2 IN.)	1.88 ± 0.051 mm (0.074 ± 0.002 IN.)
Large	6.35 cm (2-1/2IN.)	2.32 ± 0.051 mm (0.091 ± 0.002 IN.)

Note: Column headings A, B, C and L refer to dimensions in Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

TABLE II

CAPACITY-HOLDING AND OPENING VALUES

SIZE	Capacity MAXIMUM cm /(INCHES)	Weight gm / (OUNCES)	* Opening PRESSURE kg / (POUNDS)
Small	0.714 cm (9/32 IN.)	170.1 gm (6 ozs)	1.36 kg to 2.72 kg (3 lbs to 6 lbs.)
Medium	1.43 cm (9/16 IN.)	340.2 gm (12 ozs)	4.08 kg to 5.44 kg (9 lbs to 12 lbs)
Large	2.54 cm (1 IN.)	453.6 gm (16 ozs)	4.76 kg to 6.58 kg (10.5 lbs to 14.5 lbs)

* NOTE: These are maximum limiting values and shall not be exceeded.

TABLE III

Classification of defects

Examine	Defects
Dimensions	Not as specified
Design	Not as specific (See Figure I)
Workmanship	See Workmanship paragraph

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

B. Sampling. Sampling for inspection and tests shall be performed in accordance with MIL-STD-105, except where otherwise specified. For purposes of sampling, a lot shall consist of all clips of the same description manufactured under the same conditions at essentially the same time.

1) Sampling for visual inspection. A random sample shall be taken from each lot in accordance with inspection Level S-3. The AQL shall be 2.5 percent defective. Sample shall be examined for defects listed in Table III. The sample unit shall be one clip.

2) Sampling for dimensional inspection. A random sample shall be taken from each lot in accordance with inspection Level S-2. The AQL shall be 2.5 percent defective. Sample shall be examined for defects listed in Table III. The sample unit shall be one clip.

3) Sampling for tests. A random sample shall be taken from each lot in accordance with Inspection Level S-2. The AQL shall be 2.5 percent defective. The sample unit shall be one clip. The sample unit shall be performance tested as required by paragraphs 2A & B. Any unit not meeting the test criteria will be counted as a defective unit.

4) Packaging, Packing, and Marking - Inspection Level S-2 with an AQL of 4.0 percent defective. The sample unit shall be one fully prepared shipping container.

4. Recovered Materials

"The offeror/ contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR)."

5. Application for copies of technical documents referenced herein: The issue date in effect on date of invitation for bids or request for proposal shall apply.

MIL STD 105 is available from Naval Publications and Forms Center; 5801 Tabor Avenue; Philadelphia, PA 19120.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

6. Preparation for delivery

Packaging and packing of the binder clips shall be as specified in the contract or purchase order(See 7A).

7. Notes

A. Ordering Data:

Ordering activities should specify the following:

(1) Size
(2) Packaging, packing and marking.

B. Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

AA403-1 : This example describes a BINDER CLIP,Small

1 - Size - Small

2 - Size - Medium

3 - Size - Large

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

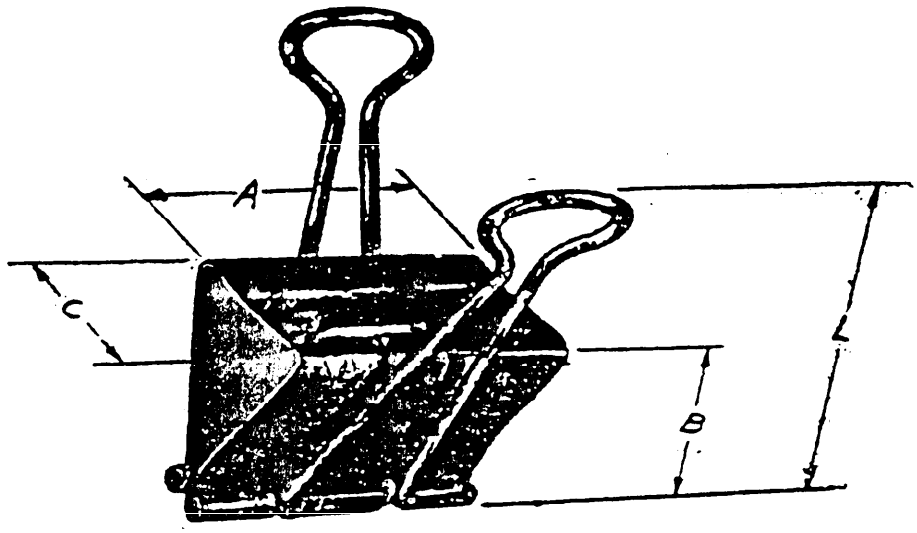


FIGURE 1

All dimensions listed above are outside dimensions.

MILITARY INTERESTS:
None Registered

PREPARING ACTIVITY
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.