INCH-POUND
A-A-50367A

16 December 1991
A-A-50367
1 March 1989

COMMERCIAL ITEM DESCRIPTION

COAT, MAN'S, ALL WEATHER, WITH REMOVABLE LINER

This Commercial Item Description is authorized for use in preference to MIL-C-24920.

Description. The coat shall be single breasted with front fly with four (4) buttons, a lapel button, and a throat tab with two buttons. The front facing shall have a storm tab with button. It shall have a front and back yoke lining made of basic material which is tacked at the side seams. It shall have split shoulder design (set-in front and raglan back) with shoulder epaulets. The epaulet points shall touch the finished collar seam and the epaulet shall be centered directly over the shoulder seam. The sleeve shall have buttoning sleeve tabs with two buttons for adjustment. The coat shall have welt pockets with pass-through slits. The back shall have a center back vent with button and buttonhole closure. The removable liner shall be made of pile material, with bound edges, raglan sleeves with buttons and loops for attaching to inner sleeve bottoms, bound pass-through pocket slits and a slide fastener to match inside slide fastener on coat (see Figure 1). Each coat shall have a hanger loop positioned in the center back at top collar stand. Topstitching shall be 3/8 inch.

Sizes. The coats shall be provided in sizes 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, and 52.

Lengths. The lengths shall be short, regular, long and extra-long.

Basic material. The basic material for the coat shall be a 65% polyester/35% cotton water repellent treated poplin fabric, shade Navy Blue 3346, conforming to MIL-C-29363. The piece number for the standard sample is 90094. The fabric shall meet the following requirements:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P. O. Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

ASMC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

Basic material. (continued)

Hydrostatic height - cm (min.)		FED Test Method 5514, 5556, and 5508 as applicable
Initial	35	
After 1 drycleaning	35	
Spray rating (equal to or better than)		FED Test Method 5526 and 5508 as applicable
Initial	100, 100, 90	
After 1 drycleaning	80, 80, 70	

Liner material. The material for the removable liner shall be acrylic fiber pile with acrylic, polyester or polypropylene backed cloth. The minimum weight of the fabric shall be 13.0 oz/sq yd, with a minimum shearable pile weight of 4.0 oz/sq yd. Shrinkage after dry cleaning shall be not more than 5.0%, when tested in accordance with TM 5580 of FED-STD-191. The color shall be black.

Sleeve linings and bindings. The material for the sleeve lining, for binding the back of the shell facings, and binding of the removable liner shall be a black nylon taffeta. The color shall be a good match to the basic material. The cloth shall weigh 1.75 to 2.3 oz/sq yd.

Liner sleeves. The material for the liner sleeves shall be a black satin cloth, rayon face and cotton back, weighing 8.2 oz/sq yd (minimum), or acetate face and rayon back weighing 6.5 oz/sq yd (minimum). The color shall be a good match to the liner material.

NOTE: Unless otherwise specified, all fabric components shall demonstrate commercially acceptable colorfastness properties. Fabric components used within the coat or liner shall demonstrate compatible dimensional stability properties, unless otherwise specified.

Buttons. The buttons shall be black and a good match to the basic material. The buttons shall be flat, four-hole plastic, glossy finish. The coat shall have 40 line buttons for the front fly, 30 line buttons for the lapel, epaulets and storm tab, and 24 line buttons for sleeve tabs, sleeve liner, throat tab, and back vent. The stay buttons shall be 18 line. The buttons shall be shank wrapped.

Slide fastener. The slide fastener shall be brass with a short pull tab and black tape. The length of the fastener shall be 68 inches for the Short and 70 inches for Regular, Long, and X-Long.

Thread. The thread for all seaming and stitching shall be black, 2 or 3 ply covered polyester thread, demonstrating commercially acceptable colorfastness properties.

Fusible interlining. The fusible interlining for the top collar, epaulets, pocket welts, front fly facings, top and bottom collar stands and for interlining sleeve bottoms shall be dark grey or black nonwoven, thermally bonded, mechanically entangled together and shall be binder free. The fusible cloth may be composed of 100% polyester or polyester and nylon with not more than 25% nylon by base weight. The fusible adhesive shall be applied to one side of the web in a uniform dot pattern in accordance with good commercial

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

Fusible interlining. (continued)
practice. The fusible material shall weigh a minimum of 1.5 oz/sq yd. The fusible interlining shall be fused to the basic material on a fusing press. All fusing of the fusible material shall be on a single ply basis (no stacking allowed). For optimum results with the particular fusible style and press used, specific settings should be obtained from the manufacturer of the fusible interlining.

Seam web tape. The tape used in topstitching the center back seam, side seams, armhole seams (optional), and top sleeve seams shall be a polyamide fusible web, 3/8 (± 1/16) inch in width and weighing 1.0 (± 0.2) ounces per square yard. The color shall be natural.

Labels. A commerical type label is acceptable in both the coat and liner provided that additional printed cloth labels containing the contractor's name, contract number, and NSN are caught in the stitching of the commercial label. The commercial label shall include fiber content information and the following care instructions:

For the coat:

Machine wash separately with warm or cold water.
Rinse three (3) times to remove all soap.
Do not spin or wring.
Hang to drip dry or complete the wash cycle and tumble dry at 140°F.
Touch up with a cool iron.

OR

Dry clean, thoroughly rinsing to remove all detergents.

For the liner:

Dry clean only - Do not press

Removable size ticket. Each coat shall have a commercial type size ticket attached at all four corners to the outside of the lower left sleeve. The ticket shall be 1 1/2 inches long and 2 inches high, made of a suitable plain white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (38R - Example) shall be printed or stamped on the upper left hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for length shall be S, R, L and XL, respectively. As an alternate, the removable size ticket may be attached to a plastic barb or string and secured to the sleeve tab button. The ticket shall be of sufficient thickness to prevent easy tearing.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides a seam allowance of 3/8 inch for safety stitched seams and joining seams. Commercial patterns may be used in lieu of Government patterns provided they conform to the cited design and finished measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

Sizes and measurements. The finished coats and liners shall conform to measurements shown in Tables I and II. Coats and liners shall be measured as indicated on Figure 1. Coat measurements shall be made with the garment fully buttoned, laid flat with the liner removed. All measurements are in inches.

Table I - Coat measurements

Size	Chest	Back length				Sleeve length
		Short	Regular	Long	X-long	
28	36	38	40	42-1/4	44-1/2	Sleeve length for all Shorts - 17
30	38	38-1/4	40-1/4	42-1/2	44-3/4	
32	40	38-1/2	40-1/2	42-3/4	45	
34	42	38-3/4	40-3/4	43	45-1/4	Sleeve length for all Regulars - 18
36	44	39	41	43-1/4	45-1/2	
38	46	39-1/4	41-1/4	43-1/2	45-3/4	
40	48	39-1/2	41-1/2	43-3/4	46	Sleeve length for all Longs - 19-1/4
42	50	39-3/4	41-3/4	44	46-1/4	
44	52	40	42	44-1/4	46-1/2	
46	54	40-1/4	42-1/4	44-1/2	46-3/4	Sleeve length for all X-longs - 20-1/4
48	56	40-1/2	42-1/2	44-3/4	47	
50	58	40-3/4	42-3/4	45	47-1/4	
52	60	41	43	45-1/4	47-1/2	
Tolerance:	± 1	± 3/4	± 3/4	± 3/4	± 3/4	± 1/2

Table II - Liner Measurements

Size	Chest	Back length				Sleeve length
		Short	Regular	Long	X-long	
28	29	29-3/8	31-3/8	33-5/8	35-3/4	Sleeve length for all Shorts - 16
30	31	29-5/8	31-5/8	33-7/8	36	
32	33	29-7/8	31-7/8	34-1/8	36-1/4	
34	35	30-1/8	32-1/8	34-3/8	36-1/2	Sleeve length for all Regulars - 17
36	37	30-3/8	32-3/8	34-5/8	36-3/4	
38	38-1/2	30-5/8	32-5/8	34-7/8	37	
40	40	30-7/8	32-7/8	35-1/8	37-1/4	Sleeve length for all Longs - 18-1/4
42	42	31-1/8	33-1/8	35-3/8	37-1/2	
44	44	31-3/8	33-3/8	35-5/8	37-3/4	
46	46	31-5/8	33-5/8	35-7/8	38	Sleeve length for all X-longs - 19-1/4
48	48	31-7/8	33-7/8	36-1/8	38-1/4	
50	50	32-1/8	34-1/8	36-3/8	38-1/2	
52	52	32-3/8	34-3/8	36-5/8	38-3/4	
Tolerance:	± 1	± 1	± 1	± 1	± 1	± 1/2

NOTE: For location of measurements, refer to Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

Workmanship. After completion, the coats and liners shall be thoroughly cleaned and all loose thread, lint and foreign matter removed. The liners shall be matched with the proper size coats and assembled together. The items shall be uniform in quality and free from irregularities or defects which adversely affect appearance, performance, reliability, or durability.

Product demonstration models. When specified, offerers are required to submit two coats of their intended production and style. Product Demonstration Models will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the Government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Responsibility for inspection. The supplier is responsible for assuring the product conforms to the requirments. Coat lots will be inspected to determine conformance with the Commercial Item Description and the successful offerer's technical proposal as negotiated. Acceptability of coat lots will be determined by the use of "Sampling Procedures and Tables for Inspection by Attributes", ANSI Z1.4, published by the American Society for Quality Control. Sampling procedures will be designated by the Government at the time of award. The sample unit is one assembled coat. The coat will be examined for commercial type defects only.

Defects. Coats shall be examined for the following defects: component part full, tight, omitted, improper, or twisted; open or puckered seam; any size hole, cut, tear, smash, misweave; missing yarn or broken yarn; loose yarn; visible mend; pleat or crease; needle chew; irregular stitching; shade bar, dye streak, or area of no dye penetration; shaded parts on the outside; any part noticeably shaded from the other parts or variation in shade within a part; thread color not a good match to basic material; any spot or stain clearly noticeable; five or more thread ends on outside not trimmed to 3/8 inch or less; buttonhole or button misplaced, omitted, with broken stitches, with ragged edges, broken or defective; button not aligned with corresponding buttonhole causing gap or tightness; pockets out of alignment; pocket welt not uniform in size and shape; pocket opening not smooth and flat; epaulet or sleeve tab not uniform in size or shape or does not lay flat; slide fastener not functioning properly, pull detaches, slider binds or sticks, chain unmeshes; binding omitted, twisted, or not securely caught; any evidence of fusible bleed through, bubbling, delamination, or color change; label missing, incorrect, or illegible; wrinkles, creases, or pressing impressions not removed; scorched area; any measurement not within tolerance specified; any variation not otherwise classified herein but at variance with the approved product demonstration model.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

Packaging. Each coat shall be buttoned at the top. The fronts shall be overlapped for an even width down the length of the coat, with the arms folded across the chest. The top front shall be folded down 1/3 and the bottom front folded up to measure approximately 23 by 15 inches. The folded coat shall be inserted into a close fitting, flat style, clear polyethylene film bag.

Packing. Six coats of one length and size only, packaged as specified above, shall be packed in a fiberboard shipping container, assembled, closed and reinforced according to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Marking. The unit package, intermediate and outer container and the palletized load, as applicable, shall be marked in accordance with MIL-STD-129.

Palletization. When specified, coats packed as specified above, shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded in accordance with means C and D, or film bonding F or G. Pallet patterns shall be in accordance with appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood group I, II, III, IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review:
DLA-CT

Project Number:
8405-N162

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

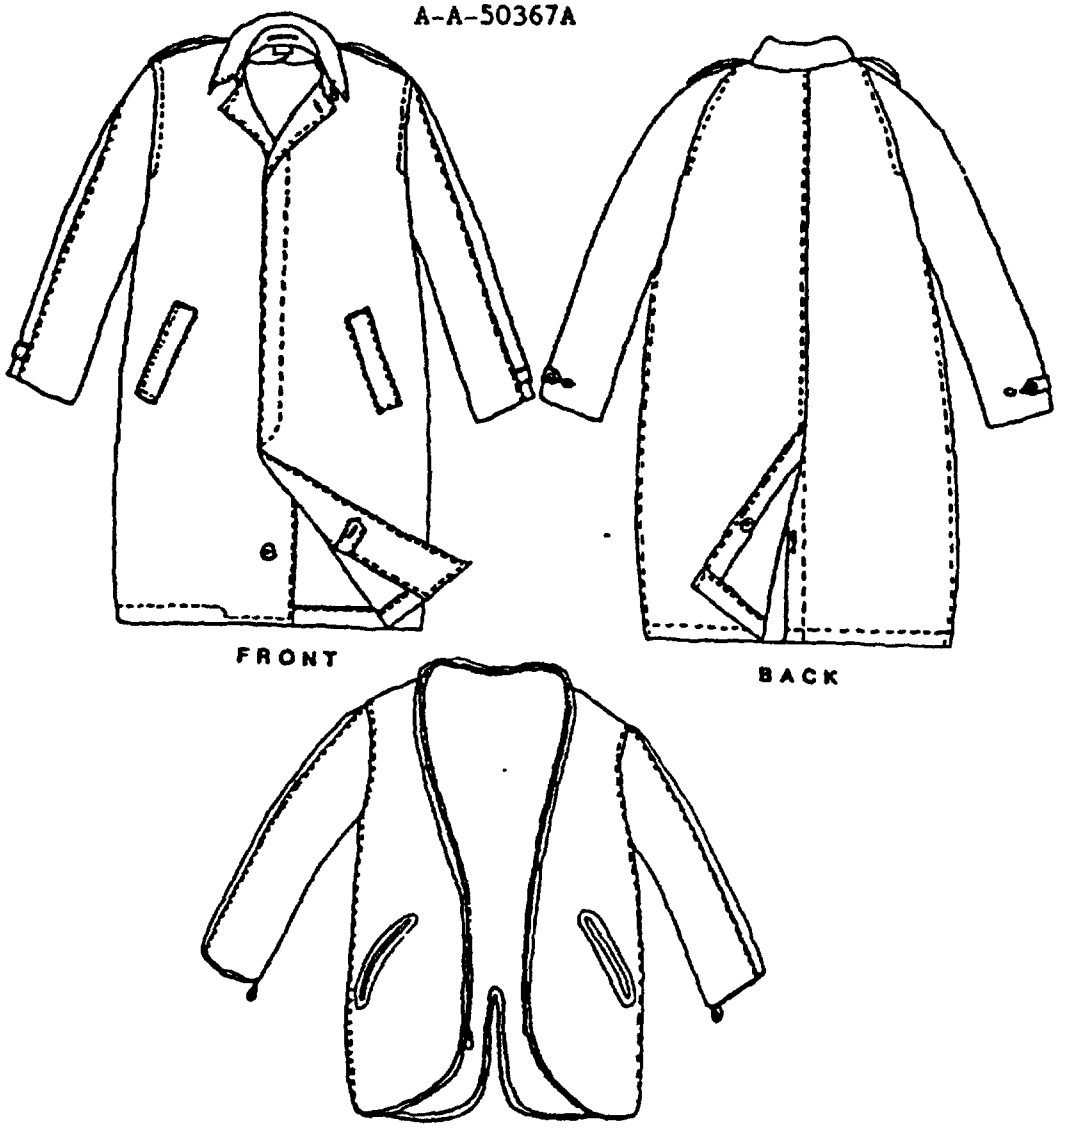

Coat:

Chest:	Double the measurement taken from folded edge to folded edge at base of armhole.
Back length:	Measurement taken from neckline seam to bottom hem along centerback.
Sleeve length:	Measurement taken from base of armhole to sleeve hem along underarm seam.

Liner:

Chest:	Fold liner in half along centerback. Double the measurement from aligned front edges to back folded edge at base of armhole.
Back length:	Measure from neck edge to bottom of liner.
Sleeve length:	Measurement taken from base of armhole to sleeve hem along underarm seam.

FIGURE 1 - COAT, MAN'S, ALL WEATHER, WITH REMOVABLE LINER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-50367A	COAT, MAN'S, ALL WEATHER, WITH REMOVABLE LINER

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil/online/start/ 2025-10-26T08:41Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
P.O. Box 59 (Code 50)
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.