INCH-POUND

A-A-50380

24 September 1990

COMMERCIAL ITEM DESCRIPTION

COAT, FOOD HANDLER'S (STEWARD)

This Commercial Item Description is authorized for use in preference to MIL-C-15096.

1. ABSTRACT

1.1 Scope. This commercial item description covers the requirements for a food handler's coat to be worn by stewards when performing duty in the wardroom.

1.2 Sizes. The coat shall be of one type only in the following sizes as specified (see 5.1).

Sizes: 32, 34, 36, 38, 40, 42, 44, 46, 48, and 50

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The coat shall be single breasted with a bodkin button closure (supplied without buttons) with a neck dart in each front, semi-fitted with set-in sleeves, and shall have a fly front with five buttonholes on the left front and five eyelets on the right front. It shall have a standing collar with ends rounded and closed at the base with metal hook and eye. The stitch type for seaming the coat, the seam type, stitch gauge and stitch length shall produce adequately durable seams throughout the garment.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

2.2 Sizes and measurements. Sizes and measurements of the finished coats are listed below. All measurements and tolerances are expressed in inches.

Size	A Chest	B Length	C Sleeve Length	D Collar Length
32	35	28-5/8	17-1/2	14-1/2
34	37	28-7/8	17-1/2	15
36	39	29-1/8	17-1/2	15-1/2
38	41	29-1/4	17-1/2	16
40	43	29-3/8	17-1/2	16-1/2
42	45	29-5/8	17-1/2	17
44	47	29-7/8	17-1/2	17-1/2
46	49	30	17-1/2	18
48	51	30-1/8	17-1/2	18-1/2
50	53	30-1/4	17-1/2	19
Tolerances:	± 1	± 1/4	± 1/4	± 1/4

NOTE: A, B, C, and D refer to Figure 1. Measurements shall be taken with the coat laid flat and smooth.

A. Chest - Twice the measurement taken across the front at the base of the armholes from folded edge to folded edge; with buttonhole eyelets on left front superimposed to coincide with eyelets on right front.

B. Length - Measurement taken along back center seam from undercollar neck seam to bottom edge of coat.

C. Sleeve length - Measurement taken along inseam from armhole seam to bottom edge of sleeve.

D. Collar length - Measurement taken from end to end of collar along base of neck with collar in open position.

2.3 Material.

2.3.1 Basic material. The basic material shall be polyester/cotton twill conforming to class 2 of MIL-C-29127, white shade 3053, piece no. 82314 or cotton twill conforming to CCC-C-461 (any type), white shade 3035, piece no. 89244.

2.3.2 Cloth, sheeting. The cotton or polyester/cotton sheeting used for the topcollar interlining, fly front, and eyelet reinforcement shall be bleached white, conforming to type II, class 2, style A or F of CCC-C-430.

2.3.3 Buttonholes. The buttonholes shall be 7/8 inch long, taper bar style, eyelet end and worked over gimp with purling on the inside of facing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

2.3.4 Eyelets. The eyelets shall have 1/8 to 3/16 inch diameter and shall be through the right front and sheeting interfacing spaced to correspond with the buttonholes and placed 1-1/4 (± 1/8) inch from front edge. The eyelets shall not go through the facing.

2.3.5 Thread. The thread used for stitching shall be of any commercial type suitable for the purpose intended. The color of the thread shall be white.

2.3.6 Hooks and eyes. The hooks and eyes shall be sew-on type, Greenberg & Hammer, Inc., style number T4/0-97 or equal, steel, with a nickel plated finish (see 5.3 and 5.4).

2.4 Labels. A commercial type label is acceptable provided that additional printed cloth labels containing the information in 2.4.1 and 2.4.2 are included.

2.4.1 Contract #, NSN, and size label. The coats shall have a label containing the contract number, NSN, and size, caught in the stitching of the commercial label.

2.4.2 Instruction label. The coats shall have an instruction label containing the information listed below. The label shall be stitched on the right front facing approximately 2 inches from the bottom.

LAUNDERING INSTRUCTIONS

MACHINE WASH - HOT WATER, TUMBLE DRY
OR
Follow NAVEDTRA Manual 414-01-45-81, Formula I

2.5 Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides a seam allowance of 3/8 inch for safety stitched seams and 1/2 inch for double needle, double lapped seams.

2.6 Product demonstration model. During the solicitation phase, interested firms shall provide the Procuring Agency with two product demonstration models of the item they propose to furnish for evaluation. The two samples provided by the successful offerer shall be tagged and sealed. One shall be retained by the Procuring Agency and the other furnished the assigned Quality Assurance Representative (QAR) for use as a reference in performing the examination in paragraph 3.2, and the scoring of defects in design, material and workmanship not otherwise classified herein.

2.7 Workmanship. After completion, the item shall be thoroughly cleaned and all loose thread, lint, and foreign matter removed. The items shall be uniform in quality and shall be free from irregularities or defects which adversely affect appearance, performance, reliability, or durability.

3. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

3.1 Certification. When requested by the contracting officer, the contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description (CID), and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Examination of the end item. The coats shall be inspected in accordance with MIL-STD-105. The defects found during the examination of the end item shall be classified in 3.2.1 and 3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 3.3. The lot size shall be expressed in units of coats. Sample unit shall be one finished coat.

3.2.1 Visual examination. The coats shall be examined for defects classified in accordance with the following list:

Defect		Classification Major	Minor
I.	MATERIAL DEFECTS AND DAMAGES		
	a. Any size hole, cut, tear, needle chew, smash, or multiple float	X	
	b. Color not as specified		X
II.	CLEANNESS		
	a. Any spot or stain		X
	b. Thread ends not trimmed		X
III.	DESIGN AND ASSEMBLY		
	a. Improper function of hook and eye closure	X	
	b. Any open seams or runoffs	X	
	c. Any raw edge on inside or outside	X	
	d. Stitch tension too tight or too loose		X
	e. Part of garment caught in any unrelated stitching operation	X	
	f. Seams puckered, twisted, or pleated		X
	g. Not cut or fabricated in accordance with the product demonstration model	X	
	NOTE: One or more broken stitiches or two or more continuous skipped or runoff stitches constitutes an open seam.		
IV.	BUTTONHOLES AND EYELETS		
	a. Omitted or added	X	
	b. Improper size		X
	c. Not located as specified	X	
V.	LABEL		
	a. Label missing, incorrect, or illegible		X
VI.	GENERAL		
	A. Any defect not otherwise classified herein but at variance with the product demonstration model		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

3.2.2 Dimension defects. The coat shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in 2.2, shall be scored as a measurement defect.
b. Sleeve lengths unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

3.3 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units, for the visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For visual examination in 3.2.1		
Major	2.5	II
Total (Major and Minor combined)	15.0	II
For dimensional examination in 3.2.2		
One class	4.0	S-3

4. PACKAGING

4.1 Preservation. Each coat shall be laid flat with front edges abutting and the back facing upward. The sleeves shall be flattened and placed alone the length of the coat. Fold the coat in half lengthwise, keeping the edges of the fronts together. The coat shall then be folded in half along the length. The completely folded coat shall measure approximately 15 inches by 11 inches. Each folded coat shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (+ 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape.

4.2 Packing. Ten coats of one size only, preserved as specified in 4.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety SW, grade 275, size 1A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Packages conforming to 4.1 shall be packed flat, reversed end for end, one in length, one in width, and ten in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

4.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

4.4 Palletization. When specified (see 5.1), item, packed as specified in 4.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

5.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this document
b. Size required (see 1.2)
c. When palletization is required (see 4.4)

5.2 Source of government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.3 Hook and eye source. A suggested source for the hooks and eyes (see 2.3.6) is Greenberg & Hammer, Inc., 24 West 57th Street, New York, NY 10019 under their style number T4/0-97.

5.4 Equal item. Prior to the use of an "or equal" item, (see 2.3.6), the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible military agency.

Custodians:
Navy - NU
Air Force - 99

Review activities:
Air Force - 82
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Navy - NU

Project 8415-0791

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

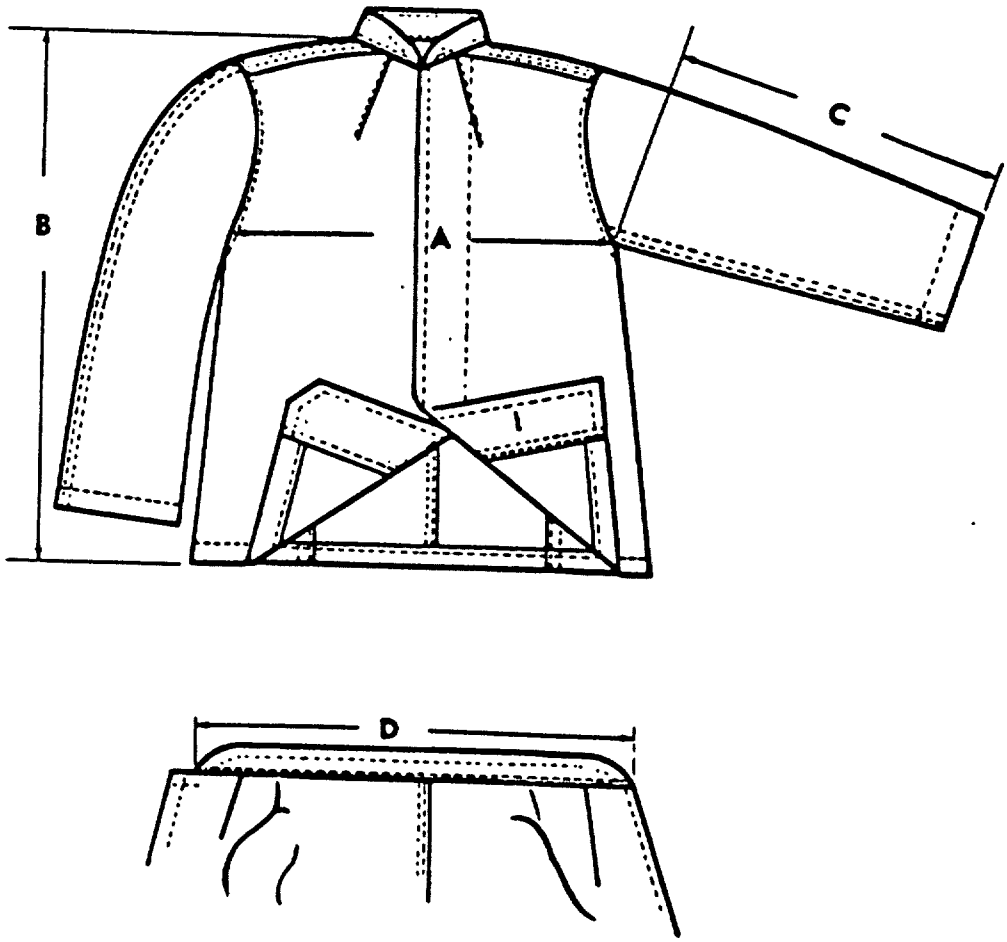


FIGURE 1

COAT, FOOD HANDLER'S (STEWARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-50380	COAT, FOOD HANDLER'S (STEWARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.