INCH-POUND

A-A-52121
March 15, 1993

COMMERCIAL ITEM DESCRIPTION

CABINET, DOUGH-PROOFING, (18 PAN CAPACITY)

The General Services Administration has authorized the use of this commercial item description in preference to W-C-20.

1. ABSTRACT

1.1 Abstract. This commercial item description covers a mobile dough-proofing cabinet of one type and size with an electrically heated humidifier.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The dough-proofing cabinet shall be fabricated of aluminum alloy or 300 series stainless steel. The cabinet shall accommodate a minimum of 18 pastry pans having nominal overall dimensions of 18-inches by 26-inches. The ledges or guides which support the pans shall be spaced a minimum 3-inches apart. The cabinet shall be equipped with a removable electrically heated humidifier located in the bottom of the cabinet. The humidifier shall be capable of maintaining 85 to 100 percent relative humidity with a cabinet temperature of 95° to 120°F. An automatic thermostat shall control the temperature of the water. An 18-hour timer graduated in 1-hour intervals shall be furnished with the unit. The cabinet shall be provided with four 5-inch diameter (minimum) removable casters. Two of the casters shall be equipped with foot brakes. The door must be able to open a minimum 180 degrees and shall have a thermometer mounted on the outside to indicate the air temperature inside the proofing cabinet without opening the door. The door shall be kept closed by means of a gravity door latch or similar. Two handles, one on each side of the cabinet, shall be mounted at a convenient height for moving and lifting of the cabinet. The proofing cabinet shall be equipped with corner bumpers.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

2.2 Electrical characteristics. Unless otherwise specified, the refrigeration unit shall operate on 120-volt, 60-Hz, 1-phase electrical system. When 50-Hz frequency is specified, the motor and wiring shall be specifically designed for operation on that frequency.

2.3 Codes and Standards. The dough-proofing cabinet shall comply with Underwriters Laboratories Inc. Standard No. 197, Commercial Cooking Appliance, and National Sanitaton Foundation Standard No. 4, Gas and Electric Commercial Cooking and Warming Equipment.

2.4 Data name plate ("Government unique" requirement). The dough-proofing cabinet shall be furnished with a data name plate. The data plate shall be made of a 20-gauge (minimum) corrosion-resistant metal and shall be attached to the cabinet by rivets, screws, or welding in such a manner as to meet the applicable National Sanitation Foundation sanitary requirements for this equipment. The plate shall be stamped, engraved or applied by photosensitive means and shall contain the following information:

National Stock Number
Procurement Contract Number
CID Number
Manufacturers Name, Address and Telephone Number
Suppliers Name, Address, and Telephone Number (list only if different from manufacturer)
Manufacturer's Model Number
Government Approved Manual Number (when specified)

Each name plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the dough-proofing cabinet.

2.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376 and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.6 Regulatory requirements In accordance with section 23.403 of the Federal Acquisition regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition, without adversely affecting performance requirements, or exposing supplier's employees to undue hazards from the recovered materials in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

Public Law 94-580, to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.7 Workmanship. All components and assemblies shall conform to NSF standards for workmanship including but not limited to the following:

No burrs, slivers, sharp edges, rough die, tool, gauge, trim or grind marks
No component fractures, buckles, dents, punctures, or malformations
Welding shall be smooth and free of cracks, burn holes, or undercuts
No fastening devices missing, broken, stripped or not drawn tightly
No finish discoloration or stains
No kinks, unspecified bends, or twists on metals

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of the Commercial Item Description and except for any "Government unique" requirements specified, conforms to the producer's own drawings, specifications, standards and quality assurance practices, and is the same product offered for sale in the commercial marketplace or is the same product that has successfully been delivered to the government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the described item conforms to the requirements of NSF, UL and ASSE standards, as applicable.

3.2.1 NSF. Acceptable evidence of meeting the requirements of NSF Standard No. 4 shall be a listing in the current edition of the NSF "Listing of Food Service Equipment" and display of the NSF seal on the finished product.

3.2.2 UL. Acceptable evidence of meeting the applicable requirements of UL shall be the UL listing mark, or a certified test report from a recognized independent testing laboratory acceptable to the Government indicating compliance with applicable requirements of UL Standard No. 197.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

4.2 Commercial packaging and packing. Each cabinet shall be preserved, packaged and packed in accordance with ASTM 3951.

4.3 Export packaging. Each cabinet shall be preserved and cushioned to protect against corrosion, deterioration and physical damage during shipment and storage. The removable casters shall be packaged in a snug-fitting fiberboard box. The box shall be securely closed and secured within the cabinet.

4.3.1 Export packing. Each cabinet shall be packed in a cleated plywood box conforming to PPP-B-601. Each box shall be closed and strapped in accordance with PPP-601.

4.4. Marking (commercial and export). Marking of unit pack and shipping container shall be in accordance with MIL-STD-129.


5. NOTES

5.1 Intended use. The dough-proofing cabinets are intended for use in bakeries, central pastry kitchens, and dining facilities kitchens for pannery proofing of yeast raised molded dough pieces prior to being loaded into the oven for baking.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Electrical characteristics of humidifier, if other than specified (see 2.2).
c. Type of packaging and packing required (see 4.1).

5.3 CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor:

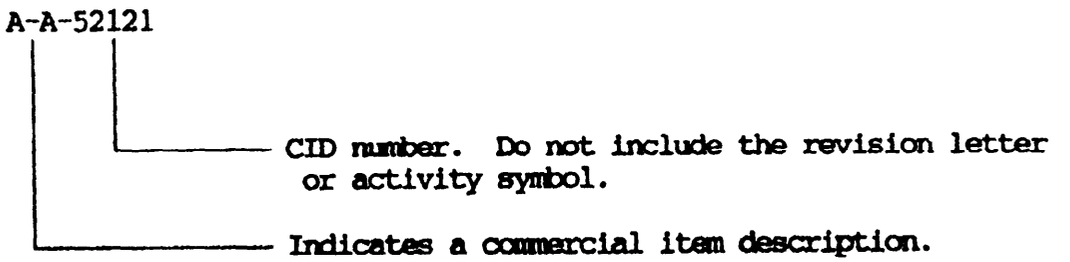

5.4 Supersession data. The 18 pan dough-proofing cabinet was previously available from Federal Specification W-C-20.

5.5 Sources of documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

5.5.1 Sources of nongovernment association documents.

UL Standard No. 197 is available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

NSF Standard No. 4 is available from:

National Sanitation Foundation (NSF)
3475 Plymouth Road
P.O. Box 1468
Ann Arbor, MI 48106

ASTM D 3951 - Standard Practice for Commercial Packaging, is available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

5.5.2 Sources of Governmental documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.6 "Government unique" requirements. The phrase "Government unique" requirement means that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force 99

Review Activities

Army - MD
Navy - MC, MS, SA

CIVAL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
VA - DMS

PREPARING ACTIVITY:

Army - GL

Project 7320-0874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.