
INCH-POUND
MIL-W-12133/1C
17 JUNE 1994
SUPERSEDING
MIL-W-12133/1B
25 APRIL 1986

MILITARY SPECIFICATION SHEET

WASHER, SPRING TENSION, BELLEVILLE SPRING, SPRING STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense
The complete requirements for acquiring the washers described herein shall consist of this specification and the latest issue of MIL-W-12133

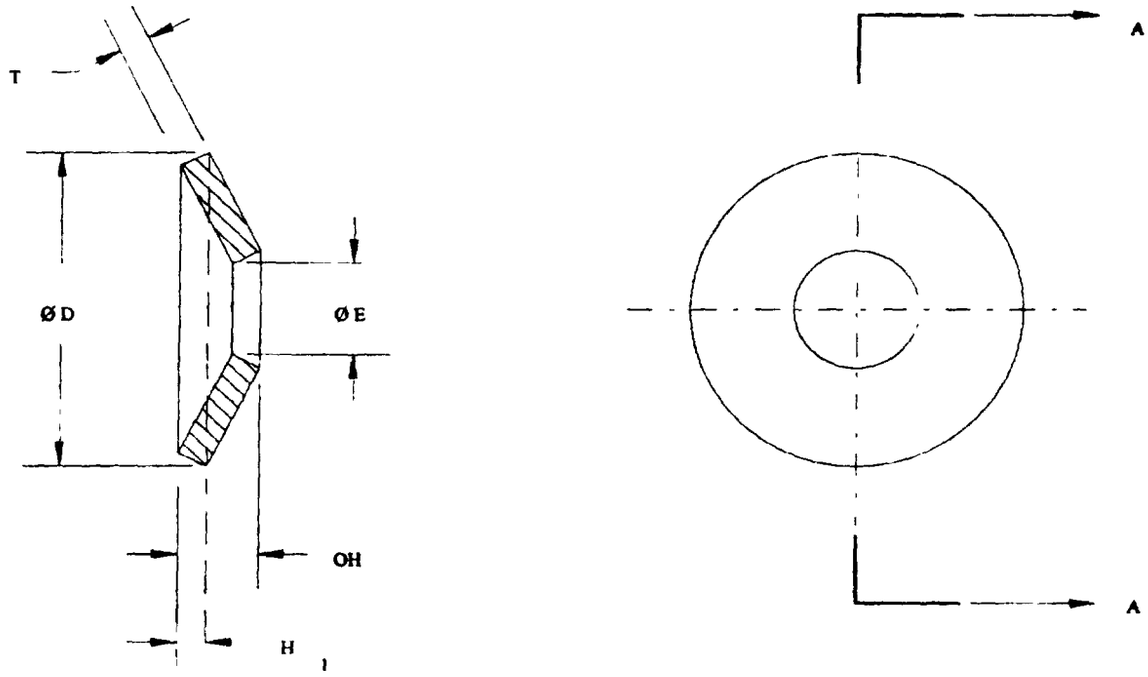

SECTION A-A

NOTES

1 All dimensions are in inches See Table I herein for tabulated data

FIGURE 1 WASHER, SPRING TENSION, BELLEVILLE SPRING, SPRING STEEL.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:25Z
Check the source to verify that this is the current version before use.

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NO	Ø D OD	Ø D TOL + 000	Ø E ID	Ø E TOL - 000	T THICKNESS NOM	T THICKNESS TOL	OH FREE HEIGHT NOM	OH FREE HEIGHT TOL	H 1 TEST DEFLECTION (REF)	LOAD AT H 1 (LBS) +/- 10%	BOLT DIAMETER (REF)
62	250	- 015	125	+ 015	009	+/- 001	017	+/- 003	006	14	112
1	250	- 015	125	+ 015	013	+/- 001	020	+/- 003	.005	37	112
69	315	- 015	125	+.010	.012	+/- 001	022	+/- 003	0072	26	.112
60	281	- 015	138	+.015	.015	+/-.001	023	+/- 003	.006	53	138
2	312	- 015	156	+ 015	017	+/- 001	025	+/-.003	006	63	.138
61	343	- 015	164	+.015	.016	+/- 001	.023	+/- 003	005	35	.164
63	375	- 015	195	+ 015	.020	+/- 001	030	+/- 003	008	96	190
3	375	- 015	195	+ 015	015	+/- 001	.027	+/- 003	009	49	190
4	500	- 020	258	+ 020	020	+/- 001	035	+/- 003	.011	78	250
64	500	- 020	258	+ 020	018	+/- 001	.034	+/- 003	012	64	.250
5	625	- 020	.317	+.020	032	+/- 002	051	+/- 005	014	252	.313
65	750	- 020	382	+ 020	.028	+/-.002	.050	+/- 005	.017	144	.375
6	750	-.025	.382	+ 020	.032	+/- 002	.054	+/- 005	.016	203	.375
66	750	- 025	382	+ 020	.040	+/- 002	.059	+/- 005	014	334	.438
68	875	- 020	442	+.010	.045	+/-.002	.067	+/- 005	011	286	438
7	1.000	- 025	445	+.025	.035	+/- 002	.067	+/- 005	024	218	438
67	1 000	- 025	505	+.025	.050	+/-.002	075	+/- 005	019	493	500
8	1 000	-.025	.512	+.025	039	+/-.002	.075	+/- 005	027	369	500
9	1 102	- 025	512	+.025	.049	+/- 002	083	+/- 005	025	503	500
10	1.375	-.030	637	+ 025	.059	+/- 002	102	+/- 008	032	724	.625
11	1.500	- 030	761	+ 030	.059	+/- 002	.114	+/- 008	041	861	.750
12	1.500	- 030	761	+ 030	.078	+/-.002	121	+/- 008	032	1431	750
13	1 750	- 030	880	+ 030	.085	+/-.003	.128	+/-.008	032	1333	.875
14	2 000	- 040	1 016	+.030	.079	+/- 003	138	+/-.008	044	1184	1.000
15	2 375	- 040	1.016	+ 030	098	+/- 003	177	+/- 008	059	2020	1.000

1 All dimensions are in inches See Table I herein for tabulated data

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 Material. Spring steel, Grades 1070 thru 1095, (UNS G10700 thru G10950) as specified in ASTM A684/A684M

2 Protective coating and surface treatment Cadmium plate, mechanically or electrodeposited, mechanically deposited zinc, or plain, as applicable (See requirement 3 herein) in accordance with MIL-W-12133

3 Part number. The part number consists of the letter "M", the basic number of this specification, followed by a dash number taken from Table I and a finish code letter, "P" for Cadmium plate (electrodeposited), "M" for Cadmium plate (mechanically deposited), "Z" for Zinc (mechanically deposited), or No Code for Plain

EXAMPLE M12133/1-1 P

- M12133/1 — Specification sheet number
- -1 — Dash letter
- P — Finish code letter
  - "P" - Cadmium plate, electrodeposited

M12133/1-1P - Indicates - Washer, Spring Tension, Belleville Spring, Spring Steel, 250 OD, 125 ID, 013 thick, .020 free height; Cadmium plate, electrodeposited

Custodians
Army - AR
Navy - OS
Air Force - 99

Review Activities
Army - ER, MI, CR
Navy - AS, MC, YD
Air Force - 11, 82

Preparing Activity
DLA - IS

(Project 5310-1891)

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:25Z
Check the source to verify that this is the currentversion before use.