
MILITARY SPECIFICATION SHEET

WASHER, SPRING TENSION, WAVE, CRES 302

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the washers described herein shall consist of this specification and the latest issue of MIL-W-12133.

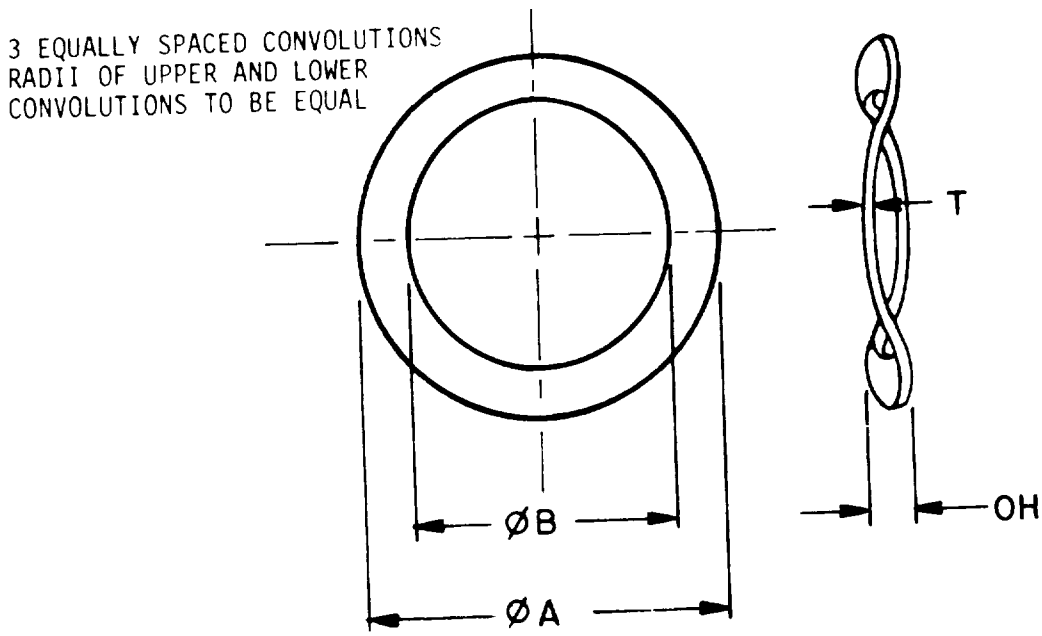

NOTES:
1. All dimensions are in inches.
2. The dimensions of the finished washers in the unplated condition shall be in accordance with Table I.

FIGURE 1. WASHER, SPRING TENSION, WAVE, CRES 302.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-17T22:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: CRES (austenitic), Type 302 (UNS S30200), Temper 1/2H as specified in MIL-S-5059.

2. Protective coating and surface treatment: Corrosion resistant steel washers (austenitic) shall be cadmium plated or cleaned, descaled and passivated in accordance with ANSI/ASTM A380, as required.

3. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from Table I and a finish code letter, "P" for Cadmium plate. No code indicates surface treatment (cleaned, descaled and passivated).

EXAMPLE: M12133/4-075P

- Finish code letter
  "P" - Cadmium plate
  No code - Cleaned, descaled and passivated
- Dash number
- Specification sheet number

M12133/4-075P Indicates - Washer, Spring Tension, Wave, CRES 302; (austenitic), Type 302 (UNS S30200); Temper 1/2H; .155 OD; .075 ID; .006 thick; .017 free height; Cadmium plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:25Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO	Ø A OUTSIDE DIAMETER		Ø B INSIDE DIAMETER		T THICKNESS		OH FREE HEIGHT		NOMINAL SIZE
	MAX	TOL	MIN	TOL	NOM	TOL	NOM	TOL	
075	.155	0 -.005	.075	+.005 0	.006	±.0015	.017	±.003	.060
083	.165		.083		.006		.018		.073
095	.211		.095		.006		.018		.086
106	.220		.106		.006		.018		.099
125	.255		.125		.006		.021		.112
134	.270		.134		.006		.021		.125
152	.305		.152		.008	±.002	.028		.138
176	.345		.176		.011		.030		.164
203	.380		.203		.012		.032		.190
367	.367		.266		.006	±.0015	.030		.250
266	.505		.266		.015	±.002	.042		.250
350	.492		.350		.007		.035		.312
332	.605		.332		.015		.052		.312
440	.618		.440		.008		.040		.438
406	.705		.406		.022	±.003	.064		.375
734	.734		.531		.009	±.002	.050		.438
469	.825		.469		.022	±.003	.070		
855	.855		.656		.010	±.002	.060		
531	.955		.531		.022	±.003	.076	±.005	.500
656	1.175		.656		.028	±.004	.090		.625
781	1.395		.781		.028		.095	±.010	.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:25Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AV, GL
Navy - AS, SH
Air Force - 11, 82
DLA - IS

User activities:
Army - AT, ME,
Navy - MC, YD

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1394)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:25Z
Check the source to verify that this is the current version before use.