MILITARY SPECIFICATION

PACKAGING OF MOUNT, TELESCOPE, M28, W/E

1. SCOPE

1.1 This specification covers the preservation, packaging, and marking for interplant shipment, domestic shipment and storage, and overseas shipment for Mount, Telescope, M28, W/E.

Nomenclature	Ord Dwg. No.	Stock No.
Mount, Telescope, M28, W/E		F002-6734472
Consisting of:		
1 Mount, Telescope, M28	90-85	F002-7578431
1 Light, Instrument, M36	D7690564	F205-7690564
2 Lamp	DLAX9 (193145-Part No.)	H104-0193145

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications and standard, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

FF-N-101 - Nails, Spikes, Staples and Tacks.
NN-B-621 - Boxes, Wood, Nailed and Lock-Corner.
QQ-S-781 - Strapping, Flat, Steel.
UU-T-111 - Tape, Paper, Gummed (Kraft).

Military

JAN-P-106 - Packaging and Packing for Overseas Shipment - Boxes; Wood, Nailed.
MIL-P-116 - Preservation, Methods of.
JAN-P-117 - Packaging and Packing for Overseas Shipment - Bags, Interior Packaging.
JAN-B-121 - Barrier-Materials, Greaseproof.
JAN-P-125 - Packaging and Packing for Overseas Shipment - Barrier-Materials, Waterproof, Flexible.
JAN-P-127 - Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
JAN-P-133 - Packaging and Packing for Overseas Shipment - Boxes, Set-Up, Paperboard.
MIL-A-140 - Adhesive, Water-Resistant, Waterproof Barrier-Material.
MIL-C-11796 - Compound, Corrosion Preventive, Petrolatum Type, Hot Application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

STANDARD
MIL-STD-129 - Marking of Shipments.

(Copies of specifications and standard required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Disassembly.- Bracket D35169 shall be removed from the mount.

3.2 Cleaning.- All exposed unpainted metal surfaces shall be thoroughly cleaned in accordance with methods C-4 and C-8 of Specification MIL-P-116. The cleaned surfaces shall be dried in accordance with method D-4 of Specification MIL-P-116. Surfaces of the instrument light and lamps such as rheostats, switches, wire insulation, electrical contact points, and other materials that will be damaged by the cleaning process shall not be cleaned.

3.3 Preservation.- (See figure 5.)

3.3.1 The cleaned and dried surfaces of the mount including the bracket and disassembled and mounting hardware, shall be coated with corrosion preventive compound conforming to class 2 of Specification MIL-C-11796.

3.3.2 The preserved surfaces shall be covered or wrapped with greaseproof barrier material conforming to type I or II, grade C, class 2 of Specification JAN-B-121.

3.4 Packaging.- (See figure 5.)

3.4.1 The spare lamps shall be individually wrapped with neutral tissue paper. The wrapped lamps shall be placed in a waterproof bag conforming to any type, grade A, class b or c of Specification JAN-P-117. The bag shall be closed by heat sealing after the excess entrapped air is removed.

3.4.2 The wire lead of the instrument light shall be coiled and the wire and lamp assembly shall be secured to the instrument light case with pressure-sensitive tape conforming to any type, any grade of Specification JAN-P-127. Each light shall be wrapped with sufficient flexible single faced corrugated fiberboard to cushion all sharp projections which would puncture the moisture vaporproof bag. The wrap shall be secured with gummed tape conforming to any grade of Specification UU-T-111. Each wrapped light shall be placed in a moisture vaporproof bag conforming to type I or II, grade A, class d of Specification JAN-P-117. The bag shall be closed by heat sealing after the excess entrapped air is removed. The instrument light package and spare lamp package shall be placed in a 10 x 3 x 3 set-up paperboard box conforming to type I or IV, any class, any style of Specification JAN-P-133. Sufficient flexible single faced corrugated fiberboard shall be used to immobilize the contents of the paperboard box. The box shall be closed by covering all seams with gummed tape conforming to any grade of Specification UU-T-111. The box shall be overwrapped with flexible waterproof barrier material conforming to type C-1 of Specification JAN-P-125. Water-resistant adhesive conforming to Specification MIL-A-140 shall be applied over all areas of contact on the seams and between the flaps on the ends. All seams shall be covered with pressure-sensitive tape conforming to any type, any grade of Specification JAN-P-127.

3.4.3 The preserved and wrapped disassembled and mounting hardware shall be wrapped with kraft paper and the wrap shall be secured with gummed tape conforming to any grade of Specification UU-T-111.

3.5 Packing.- (See figures 1 to 3 and 6 to 10 inclusive)

3.5.1 (See figures 1, 2, 3, and 6.-) A plywood base with runners, a support block, and two hold down blocks shall be constructed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

3.5.2 (See figure 7.) - The disassembled bracket shall be secured to the base. The exposed threads above the nuts shall be coated with unthinned paint or other sealer to prevent the nuts from backing off.

3.5.3 (See figure 8.) - The mount shall be secured on the blocks and base. The exposed threads above the nuts shall be coated with unthinned paint or other sealer to prevent the nuts from backing off.

3.5.4 See figure 9.) - The hardware package shall be secured to the instrument light and spare lamp package with 3 inch transparent pressure-sensitive tape conforming to any type, any grade of Specification JAN-P-127, and the packages shall then be secured to the mount with pressure-sensitive tape conforming to type I or II, any grade of Specification JAN-P-127.

3.5.5 (See figure 10.) - The base containing the telescope mount w/e, shall be immobilized by four wood cleats in a shipping container in which it shall fit snugly. The shipping container shall conform to style 2 or 4 of Specification JAN-P-106. There shall be at least 3/4 inch clearance between the contents of the shipping container and the interior surfaces of the container. When the shipment to be made is for domestic shipment and storage the container need not be strapped. When an interplant shipment is to be made, the shipping container shall conform to style 2 or 4 of Specification NN-B-621.

3.6 Marking

3.6.1 Except as noted in 6.2 and as specified herein, marking shall be in accordance with Standard MIL-STD-129.

3.6.2 The packages within the shipping container shall be identified by the nomenclature of their contents as follows:

DISASSEMBLED AND MOUNTING HARDWARE
SPARE LAMPS
LIGHT INSTRUMENT M36 AND SPARE LAMPS

3.6.3 The serial number of the mount shall be included in the permanent marking below the nomenclature and shall be indicated as shown in the following example: "SERIAL NO. 6995".

3.6.4 An official ordnance corps inspection seal (escutcheon) shall be placed on each shipping container adjacent to the permanent marking. The inspecting ordnance district's symbol, such as NYOD, BOD, etc., shall be added on or below each escutcheon.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Inspection.- Inspection of the entire packaging process shall be made. For each shipment of telescope mounts w/e, the contents of at least one shipping container shall be thoroughly examined to assure compliance with all of the details of this specification.

4.2 Test procedures.- At the discretion of the Government inspector, the rough handling tests specified in Specification MIL-P-116 may be required to assure compliance with the requirements and intent of this specification.

5. PREPARATION FOR DELIVERY

Not applicable

6. NOTES

6.1 Ordering data.- Procurement documents should specify the title, number and date of this specification and the type of shipment to be made.

6.2 Special marking.- The marking of overseas shipping containers by Army installations should be in accordance with Department of the Army and Air Force Manual SR 746-30-5, Marking of Oversea Supply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

TABLE I

Dimensions, Weight, and Bill of Material for One Shipping Container

	Dimensions in Inches			Weight in Pounds	
	Length	Width	Depth		
Inside	17-5/8	11-5/8	13	Mount, w/e	- 38
Outside	20-5/8	13-1/8	14-1/2	Tare	- 29
Displacement:	2.2 cubic feet			Gross	- 67

BILL OF MATERIAL

Nomenclature	Qty. Reqd.	Dimensions in Inches: Length	Width	Thickness	Reference
Sheathing (Top or Bottom)	2	19-1/8	13-1/8	3/4	
Sheathing (Side)	2	20-5/8	13	3/4	
Sheathing (End)	2	11-5/8	13	3/4	
Box Cleat	4	14-1/4	2-1/4	3/4	
Plywood Base	1	17-1/2	11-1/2	5/8	Figure 1
Base Runner	2	11-1/2	1-1/4	5/8	Figure 1
Hold Down Cleat	4	11-5/8	2	3/4	
Support Block	1	9-1/4	2-1/4	1-1/2	Figure 2
Hold Down Block	2	4-1/4	1-5/8	1-1/2	Figure 3
Strapping	2	58	3/8	0.020	Type I, class A or B of Spec. QQ-S-781 (or equiv. round wire)- required for overseas shipment.
1/10 lb. 6D Nails					Spec. FF-N-101
1/2 lb. 8D Nails					Spec. FF-N-101

Carriage bolt - 1/4 in. dia. by 5 in. long - with flat washer, lock washer, and nut - 2 required.
Carriage bolt - 3/8 in. dia. by 2 in. long - with flat washer, lock washer, and nut - 4 required.
Greaseproof barrier material - 3 sq. ft. - type I or II, grade C, class 2 of Spec. JAN-B-121.
Pressure-sensitive tape - 4 ft. by 1 in. - any type, any grade of Spec. JAN-P-127.
Transparent pressure-sensitive tape - 2 ft. by 3 in. - any type, any grade of Spec. JAN-P-127.
Pressure-sensitive tape - 5 ft. by 1-1/2 in. - type I or II, any grade of Spec. JAN-P-127.
Gummed tape - 3 ft. by 1-1/2 in. - any grade of Spec. UU-T-111.
Set-up paperboard box - 10 in. by 3 in. by 3 in. - type I or IV any class, any style of Spec. JAN-P-133.
Flexible single faced corrugated fiberboard - 3 sq. ft.
Neutral tissue paper - 1/10 sq. ft.
Waterproof bag - 2-1/2 in. by 3 in. - any type, grade A, class b or c of Spec. JAN-P-117.
Waterproof barrier material - 1-1/2 sq. ft. - type C-1 of Spec. JAN-P-125.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related hereto.

Custodian:
Army- Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

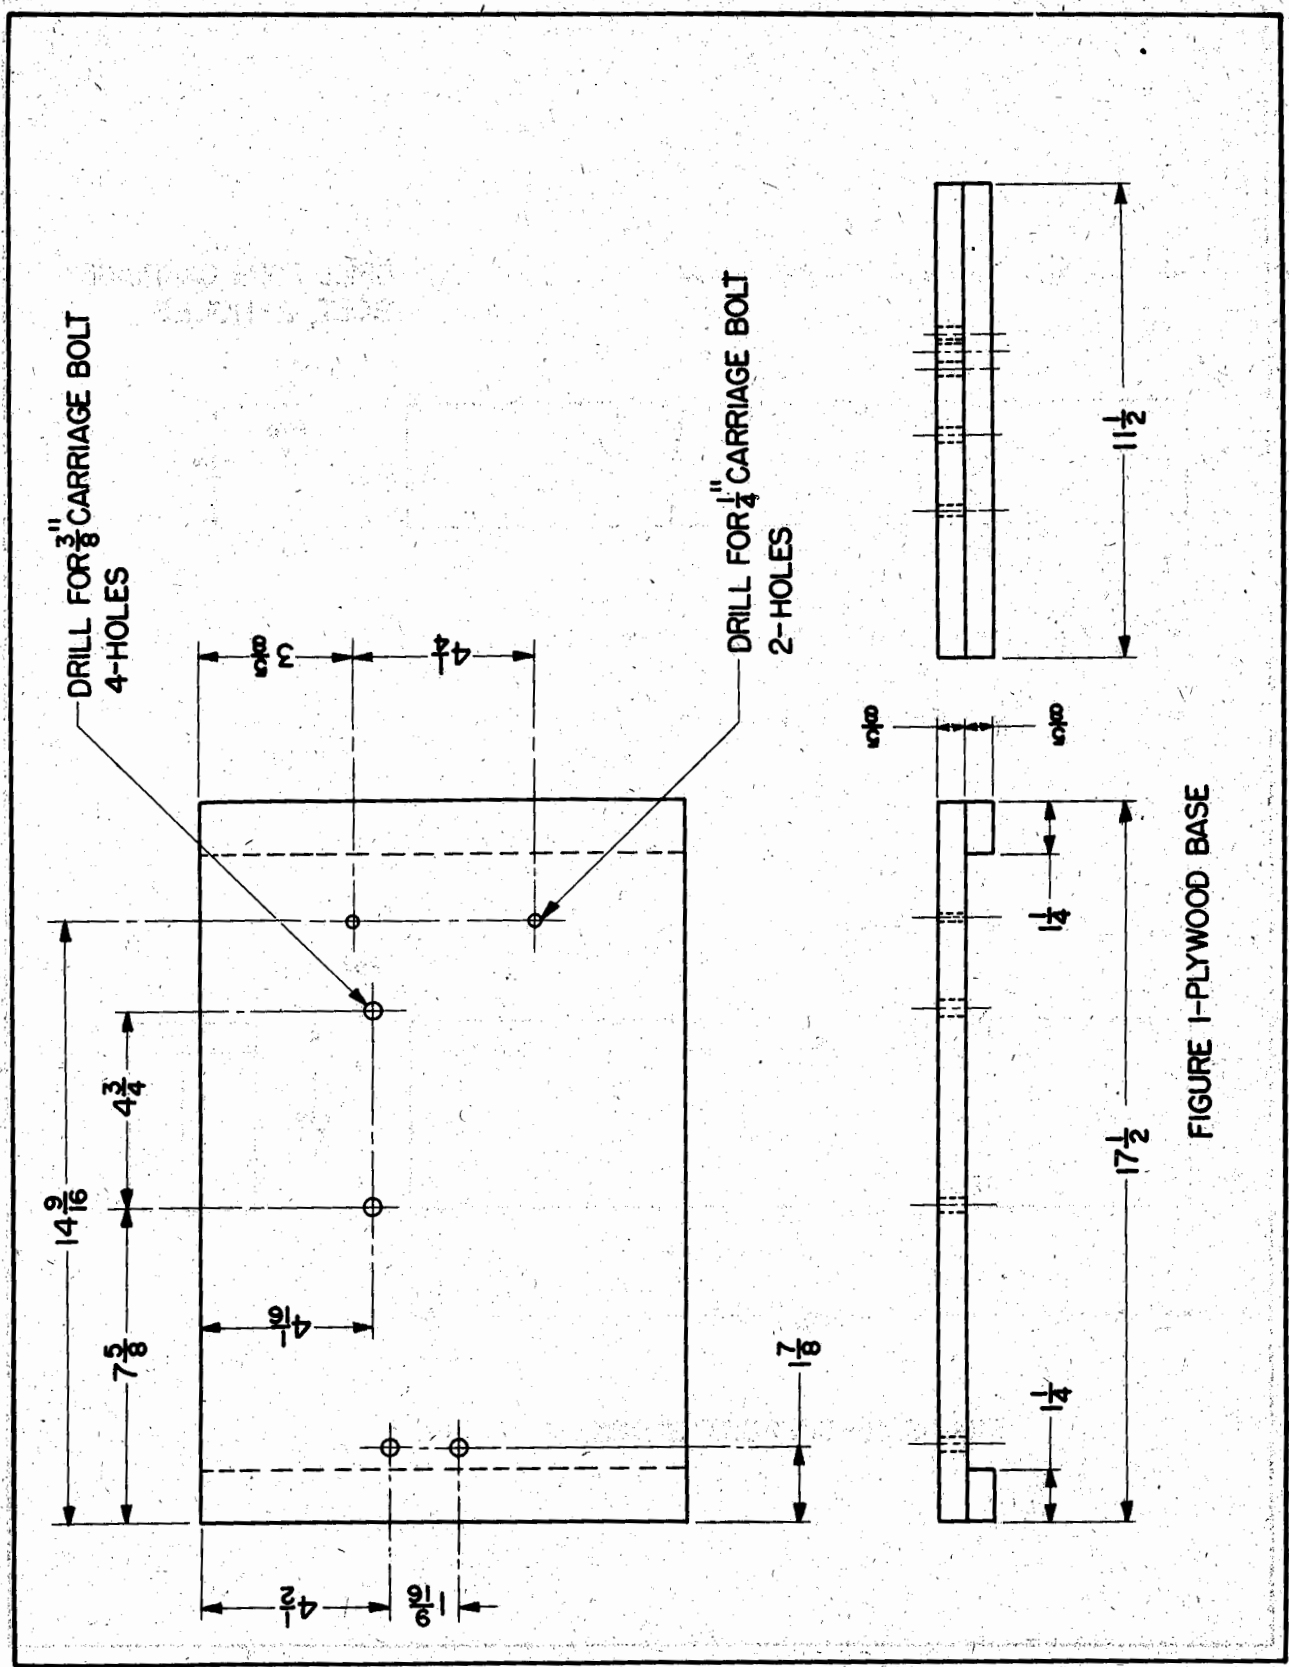


FIGURE 1-PLYWOOD BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

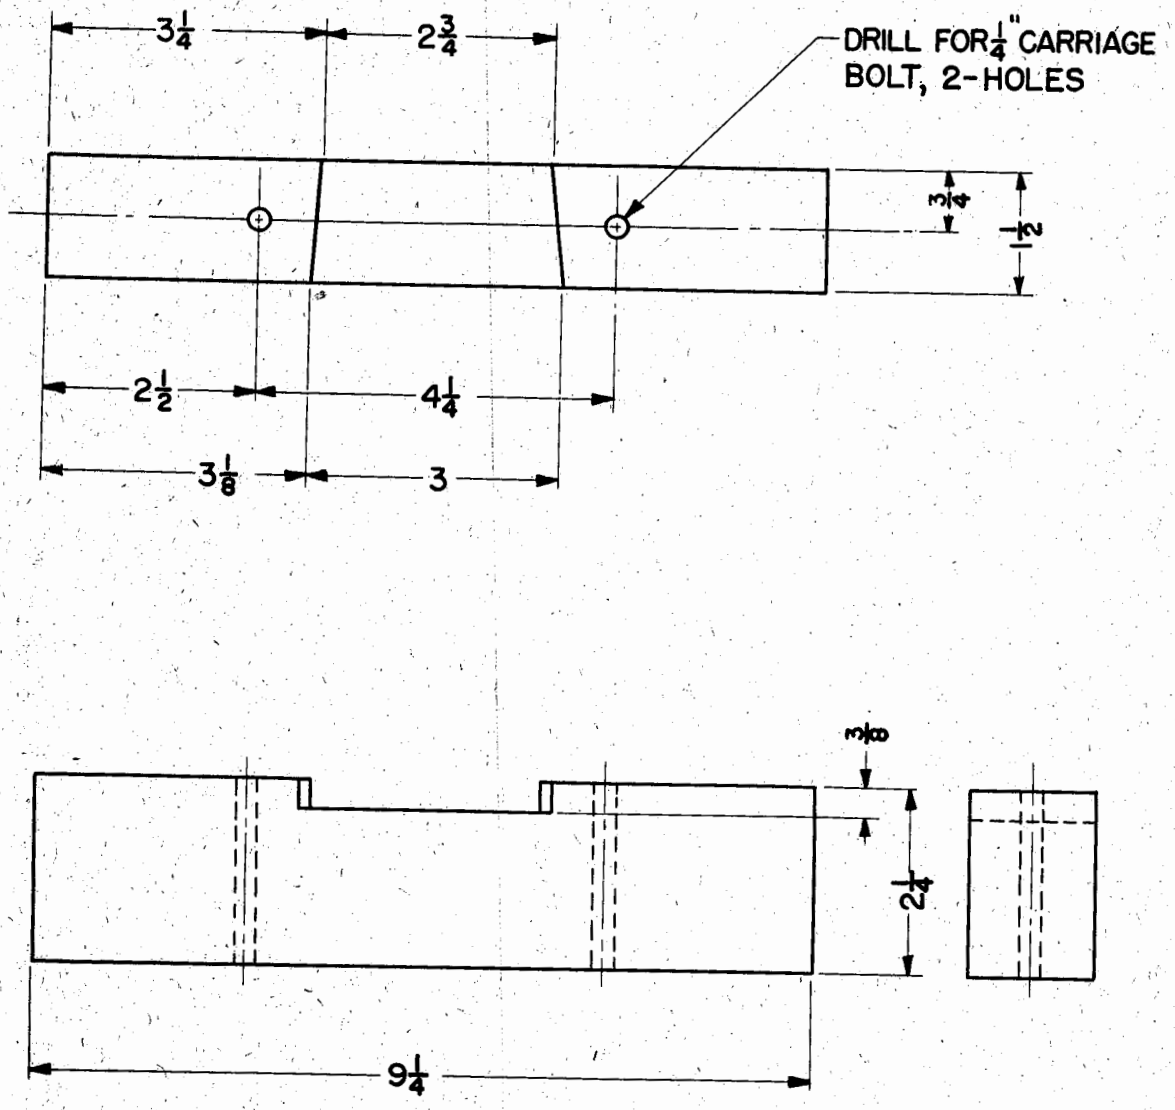


FIGURE 2—SUPPORT BLOCK

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

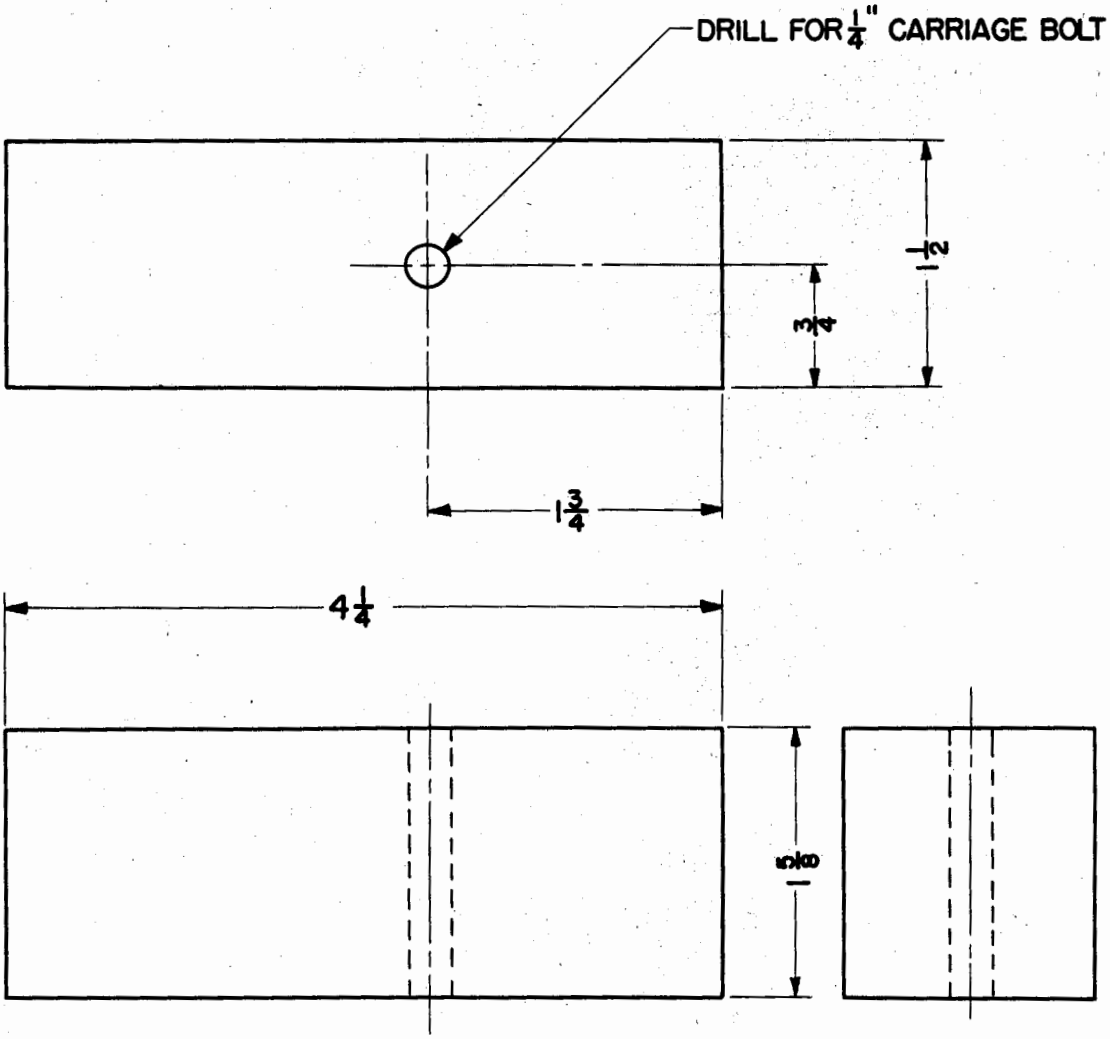


FIGURE 3-HOLD DOWN BLOCK

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

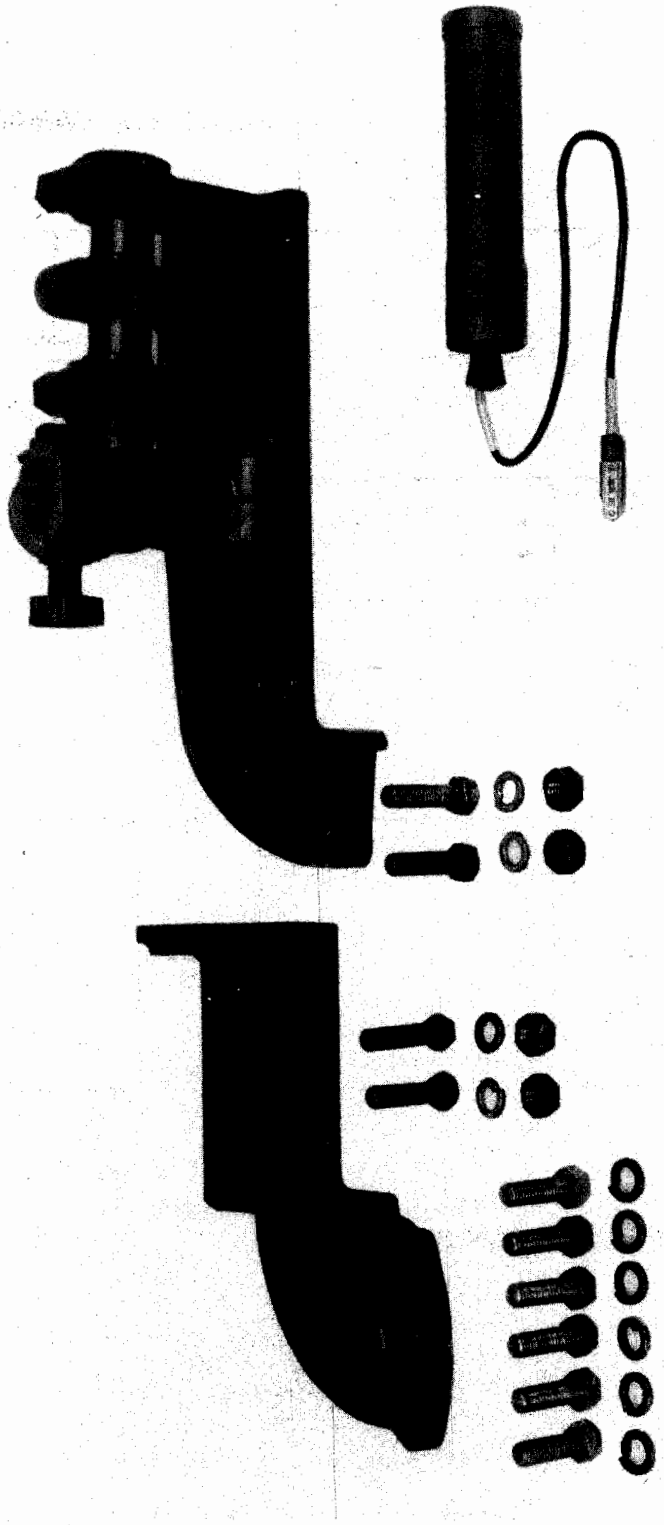


FIGURE 4
MOUNT, TELESCOPE, M28, W/E-ITEM WITH BRACKET, D35169 DISASSEMBLED FROM MOUNT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

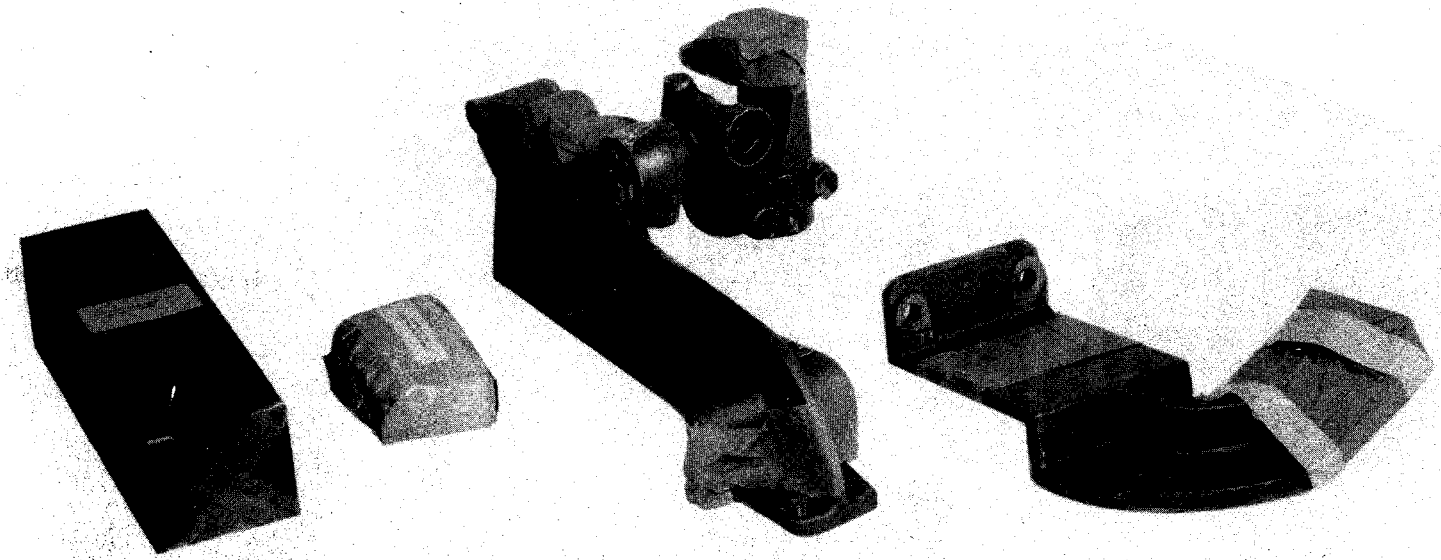


FIGURE 5
MOUNT, TELESCOPE, M28, W/E-ITEM PREPARED FOR PACKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

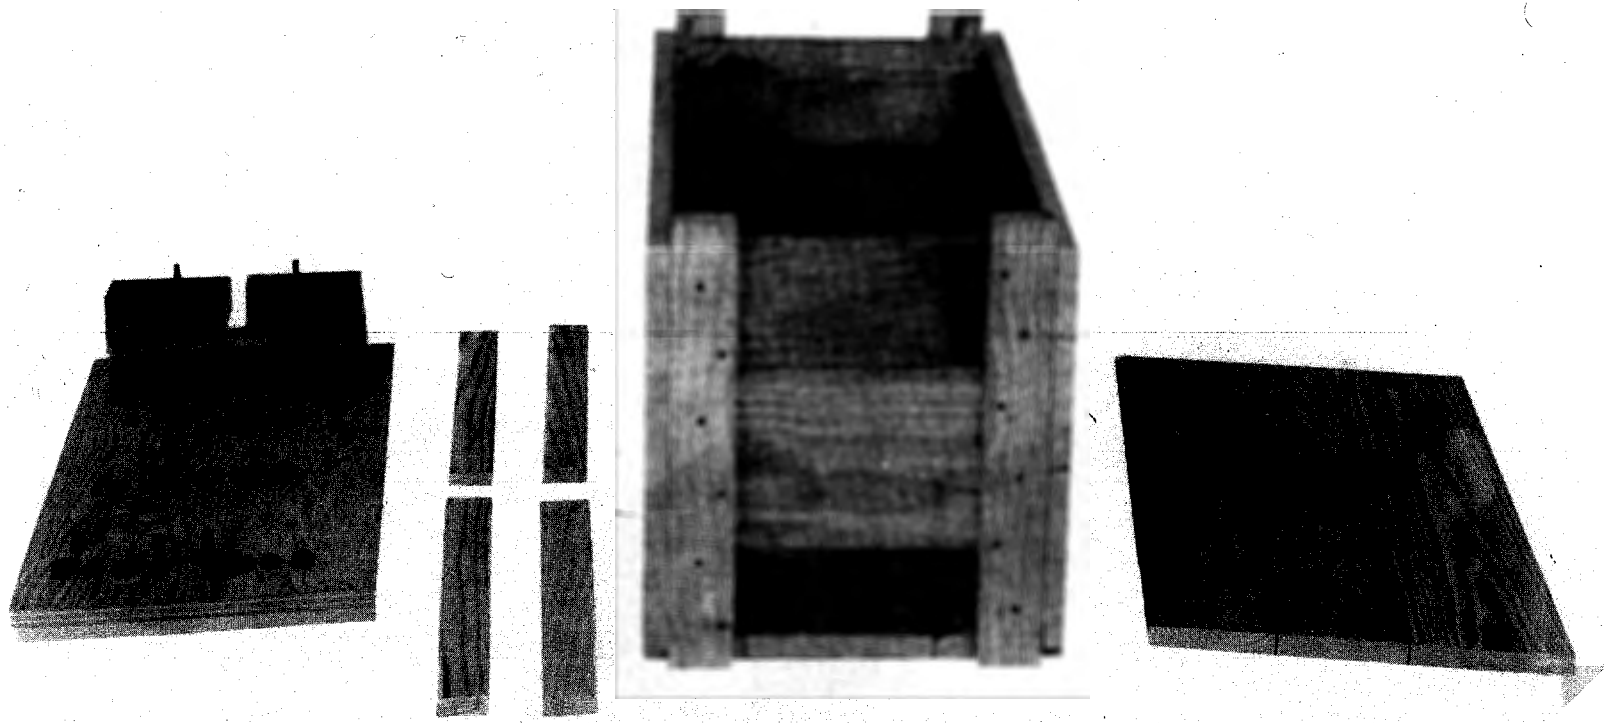


FIGURE 6
MOUNT, TELESCOPE, M28, W/E-BASE, BLOCKS. HARDWARE, BOX, AND CLEATS USED FOR PACKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

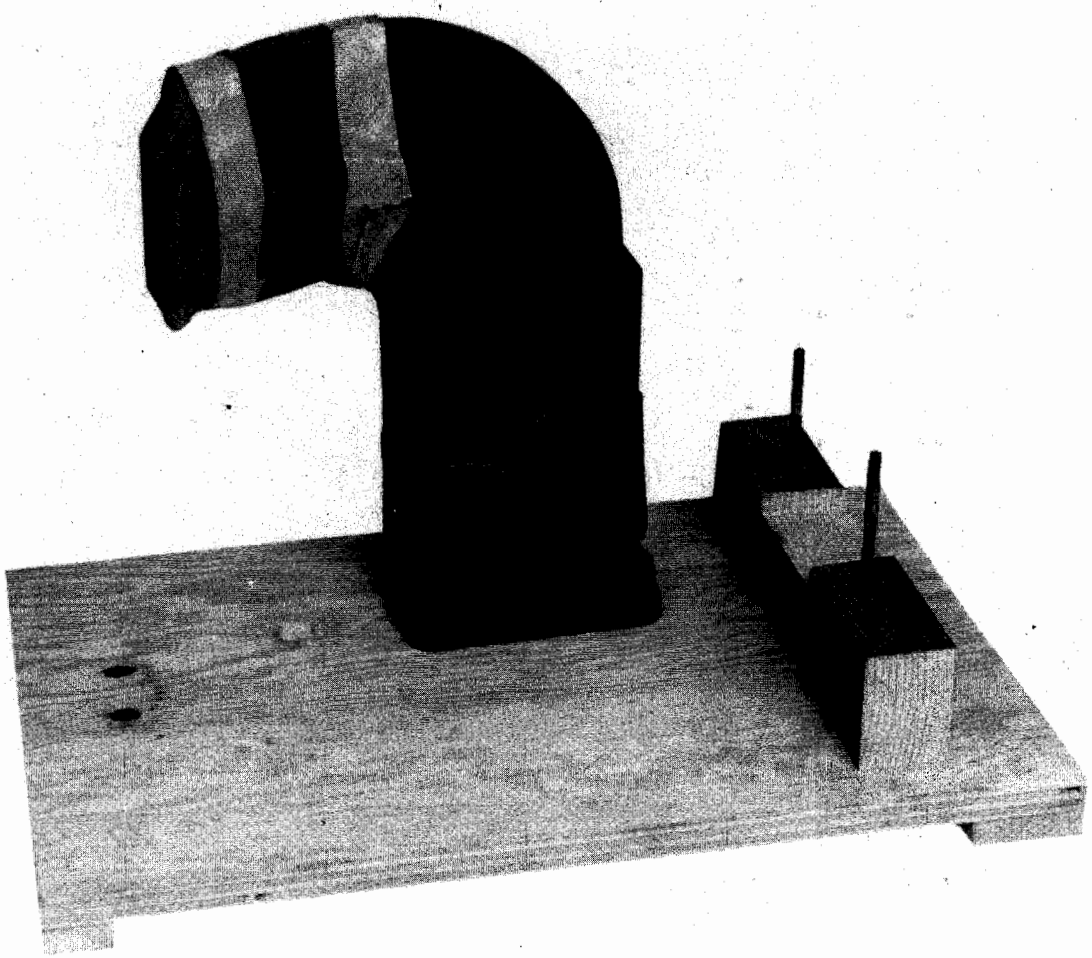


FIGURE 7
MOUNT, TELESCOPE, M28,W/E-BRACKET, D35169 AND SUPPORT BLOCK POSITIONED ON BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

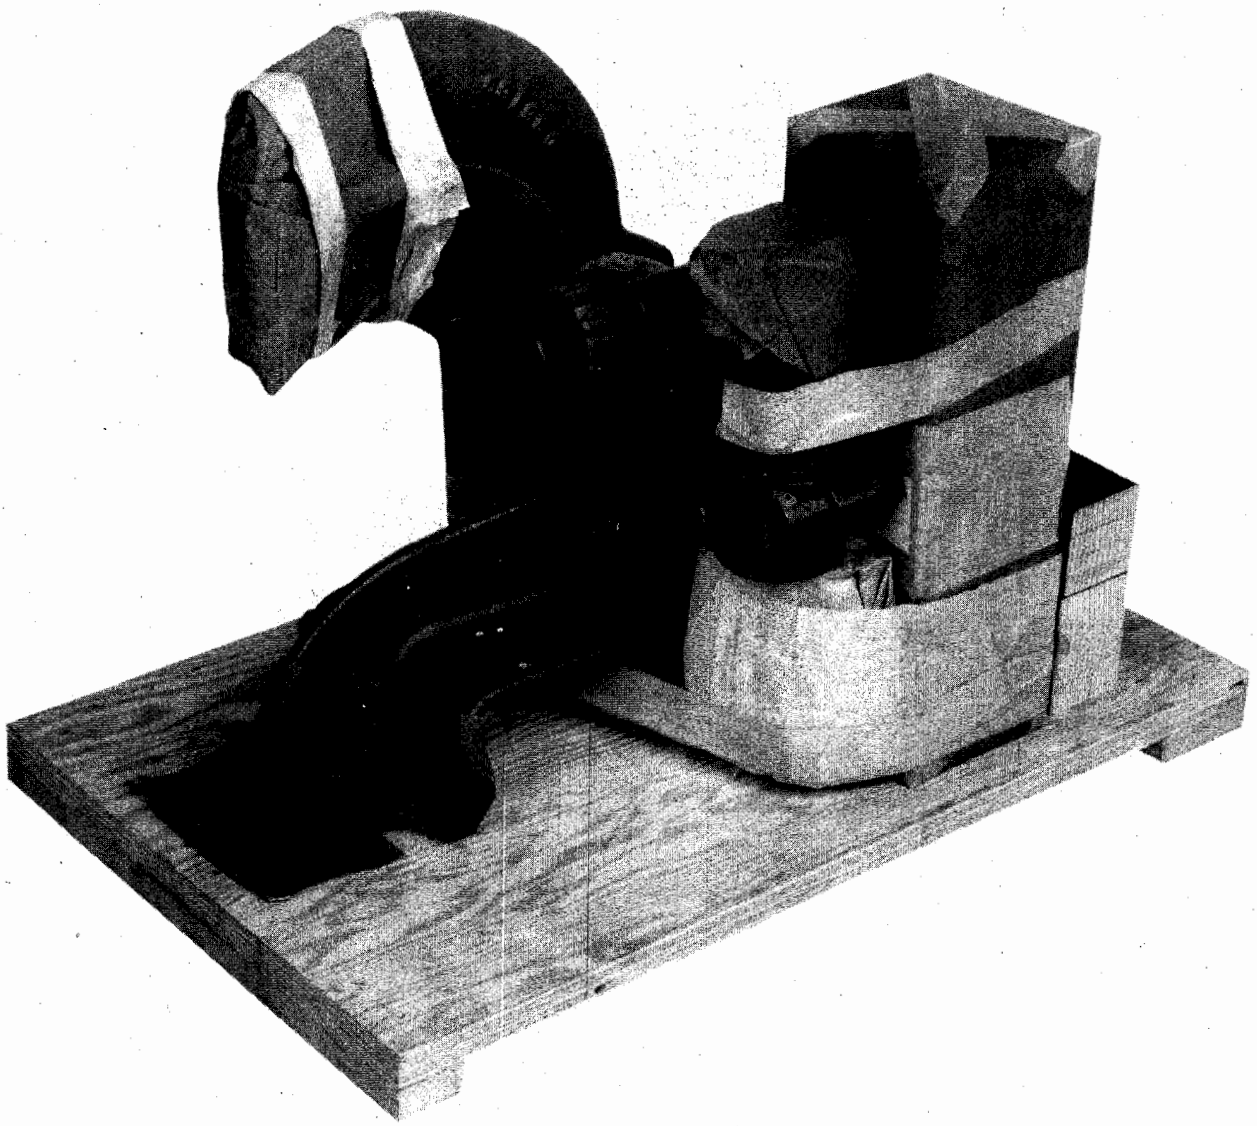


FIGURE 8
MOUNT, TELESCOPE, M28, W/E-ITEM SECURED TO BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.



FIGURE 9
MOUNT, TELESCOPE, M28, W/E-MOUNT SECURED TO BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.

FIGURE 10

MOUNT, TELESCOPE, M28, W/E-BASE WITH MOUNTED ITEM SECURED IN SHIPPING CONTAINER

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:24Z
Check the source to verify that this is the current version before use.