MIL-S-12109/16
22 November 1968

MILITARY SPECIFICATION SHEET
Solenoid, Electrical; Class 2 (Machine Gun)
Cal .30, 12 Volt DC, 8 AMP Max.

The complete requirements for procuring the Solenoid described herein shall consist of this document and the issue in effect of Specification MIL-S-12109.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

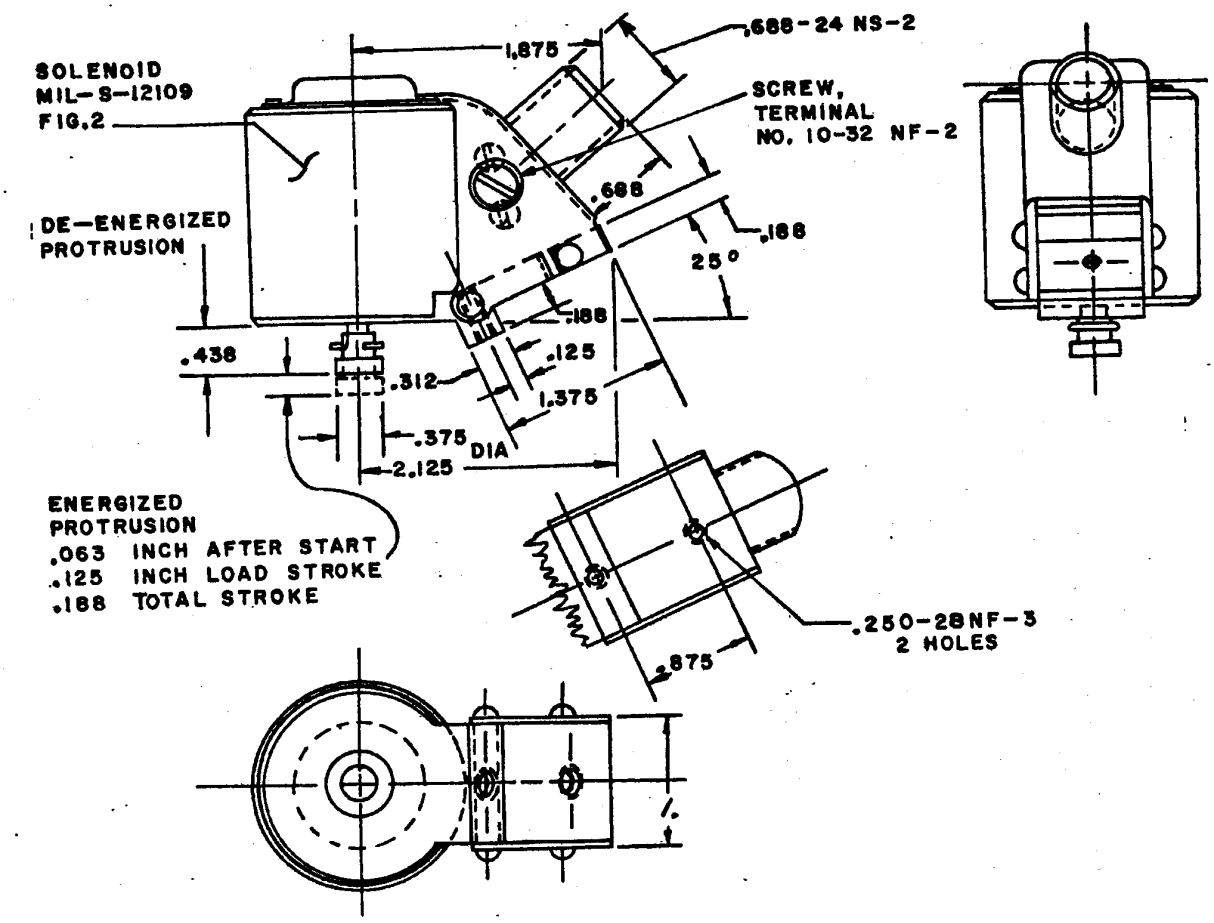

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:22Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimension are in inches. Unless otherwise specified, tolerances are $\pm$. 010 on decimals, $\pm$ 2° on angular dimensions.

2. Voltage range, 9 to 15 Volts DC.

Requirement: 12 lbs Minimum static force, over .125 load stroke after .063 running start over specified operating voltage range, (.188 total stroke).

Part Number: M12109/16-1

Former Army Part Number: 6146160 (Reference Magnavox Co. No. 14D4-G2.)

Custodians:
Army - AT
Navy - OS
Air Force - 85

Preparing activity:
Army - AT
Project No. 5945-0144-16

Review activities:
Army - MU, WC

User activities:
Army - AV
Navy - AS, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:22Z
Check the source to verify that this is the current version before use.