MIL-S-12109/19
22 November 1968

MILITARY SPECIFICATION SHEET
Solenoid, Electrical; Class 1 (Cannon),
90 MM, 24 Volt DC, 28 AMP Max.

The complete requirements for procuring the Solenoid described herein shall consist of this document and the issue in effect of Specification MIL-S-12109.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

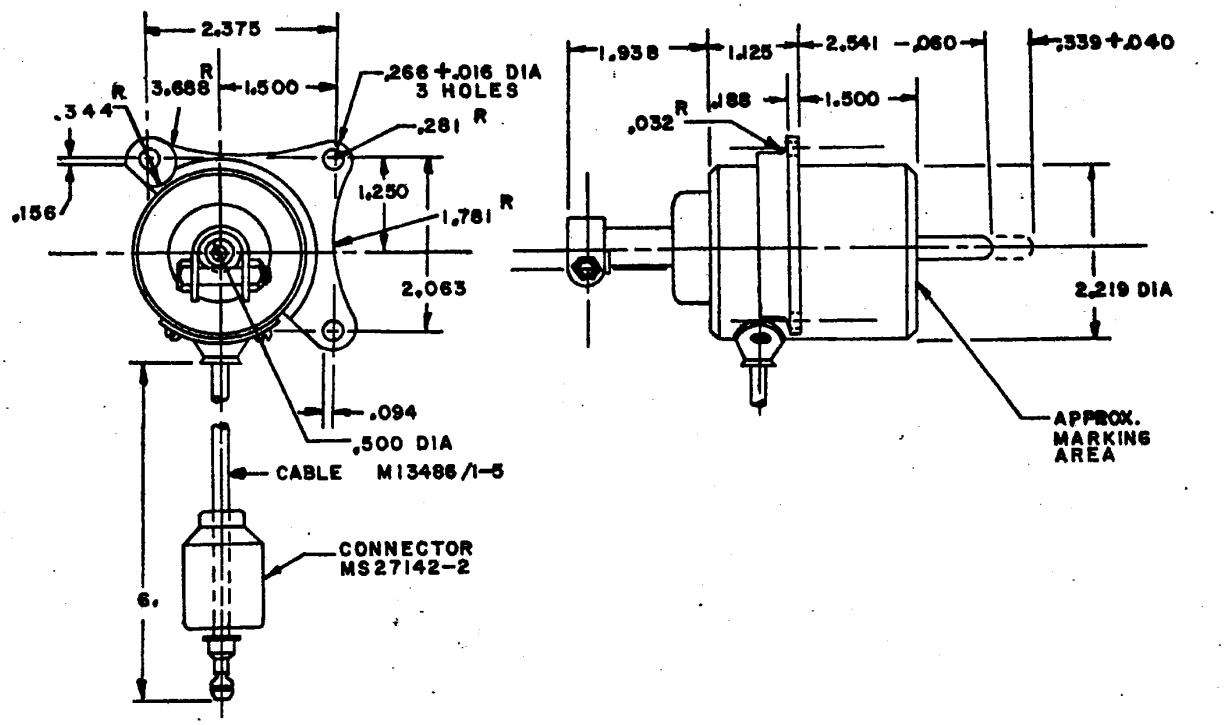

Note: Dimensions are in inches. Unless otherwise specified tolerances are ±.010 on decimals, $\pm 2^0$ on angular dimensions.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:22Z
Check the source to verify that this is the current version before use.

Requirement: 35 lbs Minimum static force over 0.339-inch stroke over specified operating voltage range.

Part Number: M12109/19-1

Former Army Part Number: 8734108, Field Service Note: For replacement parts order only base item Part No. M12109/8-1

Custodians:
Army - AT
Navy - OS
Air Force - 85

Preparing activity:
Army - AT
Project No. 5945-0144-20

Review activities:
Army – MU, WC

User activities:
Army – AV
Navy – AS, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:22Z
Check the source to verify that this is the current version before use.