MILITARY SPECIFICATION SHEET
Solenoid, Electrical; Class 1 (Cannon),
76 MM, 24 Volt DC, 28 AMP Max.

The complete requirements for procuring the Solenoid described herein shall consist of this document and the issue in effect of Specification MIL-S-12109.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

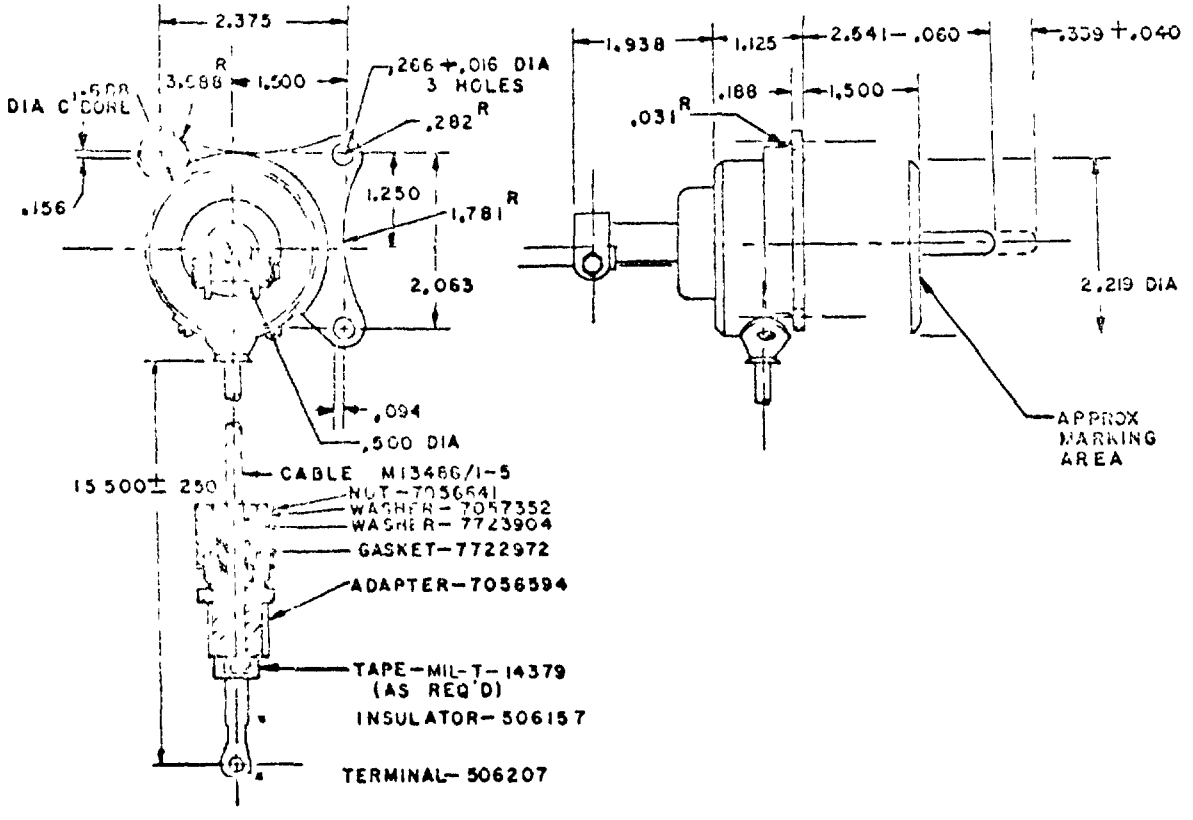


NOTE: Dimensions are in inches. Unless otherwise specified, tolerances are ± .010 on decimals, ± 2° on angular dimensions.



FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:23Z
Check the source to verify that this is the current version before use.

MIL-S-12109/20

Requirement: 35 lbs Minimum static force over 0.339-inch stroke over specified operating voltage range.

Part Number: M12109/20-1

Former Army Part Number: 7419599
For Field Service Replacement use Part No. M12109/8-1

Custodians:
Army - AT
Navy - OS
Air Force - 85

Preparing activity:
Army - AT
Project No. 5945-0144-21

Review activities:
Army - MU, WC

User activities:
Army - AV
Navy - AS, MC



☆ U S GOVERNMENT PRINTING OFFICE 1968-341-514/ A-3358

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:23Z
Check the source to verify that this is the current version before use.