
MILITARY SPECIFICATION SHEET

WASHER, SPRING TENSION, CURVED, SPRING STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the washers described herein shall consist of this specification and the latest issue of MIL-W-12133.

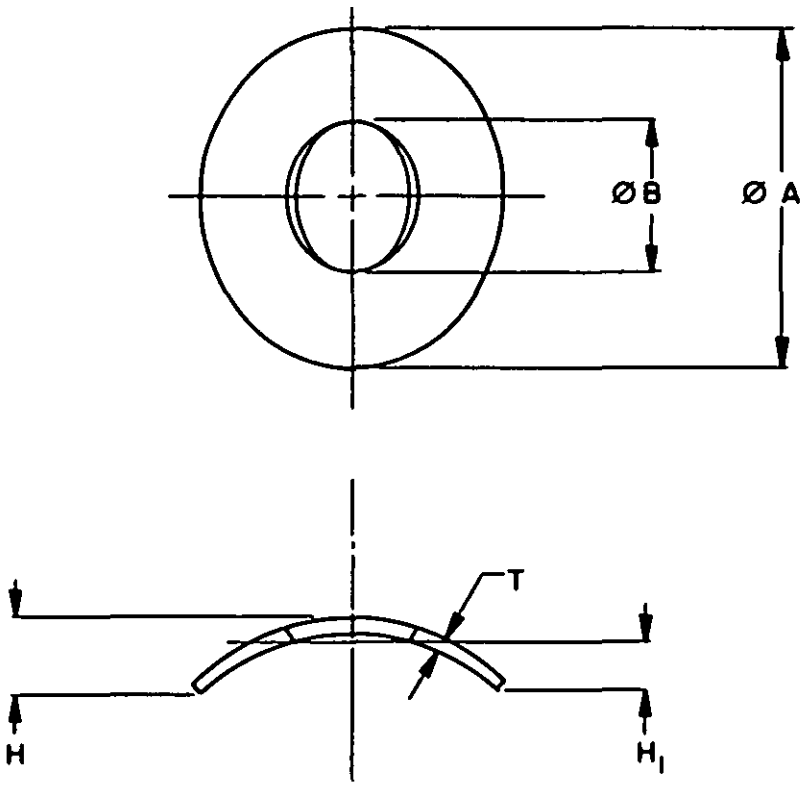

NOTES: 1. All dimensions are in inches.

FIGURE 1. WASHER, SPRING TENSION, CURVED, SPRING STEEL

(A) DENOTES CHANGES

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

1. Material: Spring steel, Grades 1070 thru 1095, as specified in ASTM A684/A684M.

(A) 2. Protective coating and surface treatment: Cadmimum or plain as applicable (see Requirement 3 herein) in accordance with MIL-W-12133.

(A) 3. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from Table I, and a finish code letter.

EXAMPLE: M12133/5-1P

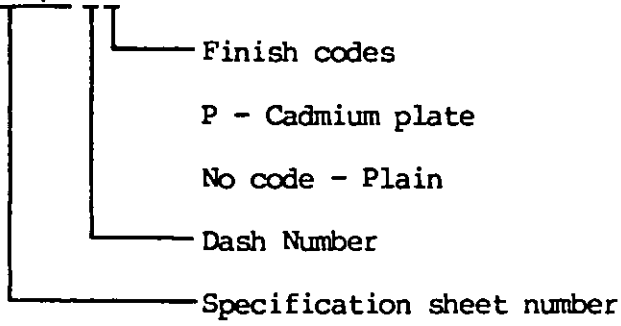

M12133/5-1P: Indicates - Washer, Spring Tension, Curved, Spring Steel; Grades 1070 thru 1095 ; .245 OD; .135 ID; .006 thick; .034 free height; Cadmium plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	FREE FIT SCREW OR ROD SIZE	ØA OD +.004 -.010	ØB ID +.010 -.000	H NOM	TOL	H_1 (REF DIM)	T THICKNESS ±.001	FREE FIT IN HOLE DIA	LOAD AT H_1 ±15% (LB)
1	.125	.245	.135	.034	±.008	.020	.006	.250	2.0
2	.138	.270	.148	.035		.022	.007	.281	2.5
3	.164	.322	.174	.042		.025	.008	.343	3.0
4	.190	.370	.200	.047		.028	.009	.375	4.5
15	.190	.370	.200	.069		.035	.006	.375	2.25
5	.216	.423	.231	.053		.032	.010	.437	5.0
6	.250	.490	.265	.063		.034	.011	.500	7.0
16	.250	.490	.265	.091		.046	.0075	.500	3.50
7	.281	.551	.296	.070	±.010	.038	.012	.562	8.0
8	.312	.612	.327	.077		.042	.013	.625	9.0
17	.312	.612	.327	.113		.060	.009	.625	4.50
9	.343	.672	.363	.081		.047	.015	.687	11.0
10	.375	.735	.395	.086		.050	.016	.750	12.0
18	.375	.735	.395	.079		.046	.015	.750	9.0
11	.437	.857	.462	.100		.057	.018	.875	15.0
12	.500	.980	.525	.110	±.015	.063	.021	1.000	20.0
13	.562	.857	.598	.110	±.010	.059	.018	.875	11.0
14	.625	.980	.663	.118	±.015	.067	.021	1.000	14.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - MI
Navy - AS
Air Force - 11, 82
DLA - IS

User activities:
Army - AT, ME
Navy - MC, YD

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1430)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.