MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, TWINAXIAL, DOUBLE SHIELD, DATA BUS, 77 OHMS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-17.

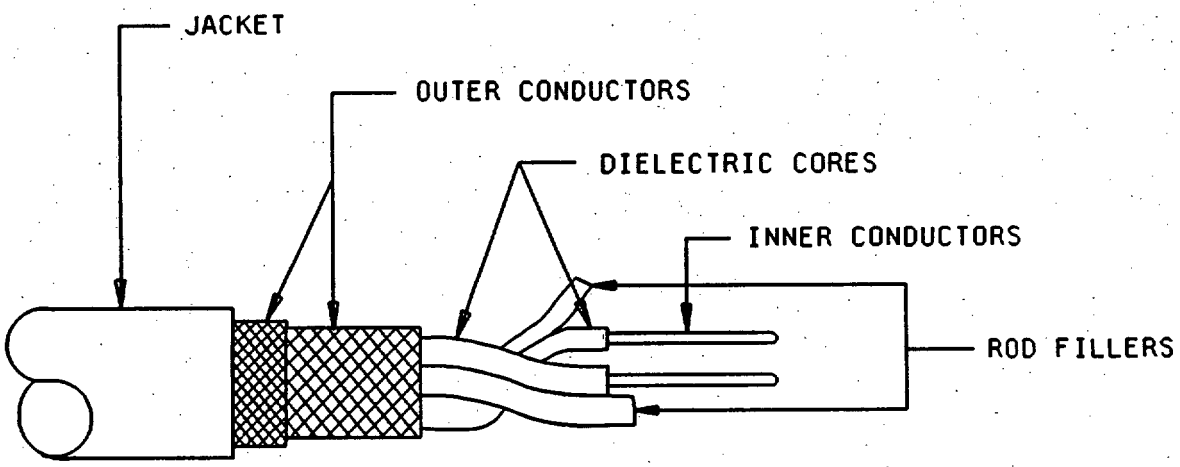


FIGURE 1. Configuration for M17/202-00001.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:31Z
Check the source to verify that this is the current version before use.

TABLE I. Description.

Components	Construction
	M17/202-00001
Inner conductors 1/	AWG 24. 19 strands AWG 36 silver-coated, high strength copper alloy. 2/
Dielectric	Radiation-crosslinked modified ETFE, one light blue, one white. Permitivity: 2.7 nominal. O.D.: .048 ±.002 inch each. 3/
Fillers	Radiation-crosslinked modified ETFE.
Braid	Inner braid: AWG 38 tin-coated copper. O.D.: .114 ±.006 inch. Outer braid: AWG 38 tin-coated copper (optimized coverage). O.D.: .131 ±.006 inch. 4/
Jacket	Radiation-crosslinked modified ETFE, white. O.D.: .147 ±.007 inch.

1/ Lay length shall be 1.00 ±.25 inch.

2/ High strength copper alloy in accordance with MIL-W-22759/35.

3/ Radiation-crosslinked modified ETFE copolymer in accordance with MIL-W-22759/35.

4/ Minimum coverage of 90% in accordance with MIL-C-27500 (shield type T).

ENGINEERING INFORMATION:

Continuous working voltage: 600 V rms maximum at sea level.

Operating frequency: 10 MHz maximum.

Velocity of propagation: 61% nominal.

Operating temperature range: -65°C to +150°C.

Inner conductor properties:

DC resistance (maximum at 20°C): 28.4 ohms/100 feet.

Elongation: 6% minimum.

Tensile strength: 22.4 pounds minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:31Z
Check the source to verify that this is the current version before use.

Jacket properties:

Elongation: 50% minimum.

Tensile strength: 5k lbf/inch^2, minimum.

Engineering note: Cables shall be suitable for use in MIL-STD-1553 data bus systems for use as main bus or stub cable.

REQUIREMENTS:

Dimensions, configuration, and description: See figure 1 and table I.

Environmental and mechanical:

Visual and mechanical examination:

Out-of-roundness: Applicable.

Eccentricity: 10% maximum.

Adhesion of conductors: Dielectrics shall be free stripping, using conventional stripping tools, without breakage of conductor strands and without bunching of the dielectric.

Electrical and mechanical:

Operational:

Continuity: Applicable.

Spark test: 1,000 V rms minimum.

Voltage withstanding: 1,000 V rms, +10%, -0%.

Insulation resistance: 5,000 megohms minimum per 1,000 feet.

Corona extinction voltage: Not applicable.

Characteristic impedance: 77 ±5 ohms at 1 MHz.

Surface transfer impedance: In accordance with MIL-C-85485; 10 milliohms/meter maximum at 1 MHz.

RF transmission loss (attenuation): 1.4 dB/100 feet maximum at 1 MHz.

Standing wave ratio (return loss): Not applicable.

Capacitance: 30 pF/foot maximum at 1 MHz.

Capacitance stability: Not applicable.

Capacitance unbalance: 5% maximum.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Aging stability: Not applicable.

Stress-crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:31Z
Check the source to verify that this is the current version before use.

Cold bend: -65°C (6-inch mandrel). Jacket shall pass spark test.

Dimensional stability: Not applicable.

Contamination: Not applicable.

Bendability: Not applicable.

Flammability: Cable shall be tested in accordance with the flammability procedure of MIL-W-22759/35 and shall meet the requirements specified therein.

Flame propagation: Not applicable.

Acid gas generation: Not applicable.

Halogen: Not applicable.

Fluid immersion: Cable shall be tested in accordance with MIL-W-22759/35 using a 6-inch diameter mandrel. There shall be no cracking of the jackets or evidence of breakdown. The increase in diameter shall be 5 percent maximum.

Smoke index: Not applicable.

Toxicity index: Not applicable.

Durometer hardness: Not applicable.

Weathering: Not applicable.

Abrasion resistance: Not applicable.

Tear strength: Not applicable.

Heat distortion: Not applicable.

Physical properties of insulation: Shall be in accordance with MIL-W-22759/35.

Hot oil immersion: Not applicable.

Accelerated aging: Shall be in accordance with MIL-W-22759/35 (.5-inch mandrel, .375-pound load).

Impulse dielectric: Shall be in accordance with MIL-W-22759/35 .

Marking: M17/202-00001.

Weight: 26.2 pounds/1,000 feet maximum.

Workmanship: Applicable.

Supersession: This specification sheet shall supersede Air Force drawing 8421527 when a QPL source becomes available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:31Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, MI, ME
Navy - AS, MC, OS, SH, TD
Air Force - 17, 19, 99

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6145-2007-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:31Z
Check the source to verify that this is the current version before use.