INTERIM FEDERAL SPECIFICATION

GLOVES, FLANNEL, COTTON, WORK

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C. 20405, based upon currently available technical information. It is recommended that Federal Agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers three styles of cotton canton flannel work gloves.

1.2 Classification.

1.2.1 Styles. Cotton work gloves covered by this specification shall be furnished in the following styles, as specified (see 6.2).

Style I - Knit wristlet, regular size.
Style II - Gauntlet Cuff, regular size.
Style III - Reversible palm, large size.

2. APPLICABLE SPECIFICATION AND STANDARDS

Federal Specifications:

V-T-276 - Thread, Cotton.
CCC-T-191 - Textile Test Methods.
DDD-L-20 - Label; for Clothing, Equipage, and Tentage (General use).
PPP-B-566 - Box, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-665 - Boxes, Paperboard, Metal Stayed.
PPP-B-676 - Boxes, Setup.

Federal Standards:

Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished by the Government, are solely for guidance and information to the supplier (see 6.2). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 Preproduction sample. When specified (see 6.1), before production is commenced, a sample brush covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorize the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Materials.

3.2.1 Canton flannel. The flannel used for the back, palm, and thumb shall be made from cleaned, unbleached cotton yarns. The fabric shall be cotton twill, napped on the back and shall conform to the minimum requirements of table I when tested as specified in 4.3.1.

3.2.1.1 The fabric for Style III shall be pre-shrunk and shall have not more than 2 percent shrinkage in the wrap and filling (see table V.).

TABLE I. Requirements for Canton Flannel (minimum)

Style	Weight per sq. yd.	Texture, yarns per inch		Breaking strength in pounds	
		warp	filling	warp	filling
I, II	10 oz.	60	34	100	50
III	8 oz.	60	34	100	70

3.2.2 Cuff Material.

3.2.2.1 Styles I and III. The fabric for the cuff shall be 1 by 1 rib knit, seamless, unbleached cotton tubing. The tubing shall conform to the requirements specified in table II.

TABLE II. Requirements for cuff tubing of Styles I and III.

Yards per pound		Knit construction		Flat width
minimum	maximum	minimum (per inch) Wales	Courses	minimum inches
12	14	14	20	2-¼

3.2.2.2 Style II. The material for the gauntlet cuff shall be composed of two thicknesses of cotton fabric securely laminated together with not less than 14 ounces per square yard of natural rubber, synthetic rubber, or synthetic resin. The face fabric shall be a cotton twill weighing 3.75 ounces per square yard and the back fabric shall be a cotton plain weave weighing 1.75 ounces per per square yard. The total weight of the finished fabric shall be 19.5 ounces per square yard ± 1 ounce.

3.2.3 Thread. The thread for seaming and stitching operations shall conform to type 1A1, minimum breaking strength of 2.1 pounds, 3 ply of V-T-276.

3.3 Color. The color of all fabric used in the gloves shall be natural, unbleached.

3.4 Labeling. The left glove of each pair shall be marked with an identification label conforming to type III or type IV, class 4 of DDD-L-20.

3.5 Design.

3.5.1 Styles I and II. The design of the gloves shall be a Clute pattern, with a sewn inseam and knitted wristlet or gauntlet cuff as applicable (see fig. 1).

3.5.2 Style III. The design of the gloves shall be a Gunn pattern, reversible palm with a sewn inseam and knitted wristlet as shown in fig. 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE III. Description of operations

No.	Description	Stitch type	Seam & Stitch	Stitches per inch
1.	Cutting. The gloves shall be cut in accordance with the patterns. a. The hand parts shall be cut in the direction of the warp from the fabric specified in 3.2.1 with the napped side of the flannel on the inside of the glove. They shall consist of the pieces as follows: Style I and II. 1. Palm, index finger, under part of the thumb, and under part of the 2nd, 3rd, and 4th fingers. 2. Upper part of the thumb. 3. Upper part of the 2nd finger. 4. Upper part of the 3rd finger. 5. Upper part of the 4th finger. Style III. 1. Palm, index finger, palm side 4th finger, the back of the 2nd, 3rd, and 4th fingers. 2. The palm side of the 2nd and 3rd fingers. 3. The thumb. b. The knit cuff shall be cut from the fabric specified in 3.2.2.1 and turned inside itself so as to form a double thickness. c. The gauntlet cuff shall be cut from the material specified in 3.2.2.2. The cuff shall be cut in the wrap direction.			
2.	Join hand parts. Join hand parts by inseaming with one row of stitching; 1/8 to 3/16 inch from the cut edge.	301 or 401	SSa-1 SSa-1	10-14 10-14
3.	Attach cuff.			
	a. Join cut ends of double thickness wrist tubing to hand by inseaming with one row of stitching ¼ to 5/16 inch from the cut edge, completely around and continuing the stitching by at least 1 inch beyond the beginning and leaving ½ to 3/4 inch chain at point of run off.	301 or 401	SSa-1 SSa-1	8-12 8-12
	b. Join the gauntlet cuff, after having been overedged at the top and bottom, to the hand with one row of stitching ¼ to 5/16 inch from the bottom edge.	301 or 401	SSa-1 SSa-1	8-12 8-12
4.	Labeling. The identification marking shall be applied on the back of the left glove facing the top. There shall be a minimum distance of ½ inch between the last line of the marking and the knitted cuff.			
5.	Forming. The gloves shall be properly formed on heated forms and all seams worked out.			
6.	Cleaning. Remove all spots, stains, and loose ends. Trim thread ends.			
7.	Pairing. The finished gloves shall be matched, paired and tacked, or stapled together in accordance with the best commercial practice which will permit the gloves to be pulled apart without tearing the fabric.			

3.6 Figures. Figures 1 and 2 are furnished for illustration purposes only.

3.7 Patterns. The dies or patterns for cutting all parts of the gloves shall be furnished by the supplier and shall be of proper proportions to provide gloves ~~conforming to finished measurements in~~ table IV

3.8 Construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.8.1 Manufacturing operations requirements. The gloves shall be manufactured by and with the use of all operations specified in table III. The supplier is not required to follow the exact sequence of operations.

3.8.1.1 Stitches, Seams, and Stitching. The stitch, seams, and stitching types specified in table III shall conform to Fed. Std. No. 751. When two or more methods, seams, or stitch types are given for the same part of an operation, any method cited may be used. Where stitch type 401 is specified, the looper shall be on the inside of the glove.

3.8.1.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

3.8.1.3 Thread breaks and ends of seams. Ends of 301 stitch type seams and stitching not caught in other seams or stitching, shall be backtracked not less than 1/2 inch. Both ends of 401 stitch type seams and stitching not caught in other seams or stitching, shall have 1/2 to 3/4 inch chain extending beyond each end. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.9 Measurements. The finished glove shall conform to the measurements shown in table IV. All measurements shall be made with the glove laid out flat under no tension.

TABLE IV. Measurements of men's finished gloves (inches)

Location	Clute Pattern Regular			Gunn Pattern Large Size Reversible Palm	
	Knit Wrist	Gauntlet	Tolerance + or −	Knit Wrist	Tolerance + or −
A. O/A length, tip 2nd finger to top of cuff	10-1/2	12-3/4	± 1/4	10-3/8	± 1/4
B. Hand length, tip 2nd finger to wrist seam	7-1/2	7-1/2	± 1/4	7-5/8	± 1/4
C. Length of thumb, crotch to tip	2-5/8	2-5/8	± 1/4	2-7/8	± 1/4
D. Reach, base of thumb to tip of 2nd finger	5-1/2	5-1/2	± 1/4	5-1/2	± 1/4
E. Length of 2nd finger, crotch to tip (length of other finger in proportion)	3-1/4	3-1/4	± 1/4	3-1/2	± 1/4
F. Length of cuff, top to wrist seam	2-3/4	4-1/2	± 1/4	2-3/4	± 1/4
G. Width across palm at base of thumb	5-3/8	5-3/8	± 1/4	5-3/8	± 1/4
H. Width of cuff, top opening	2-1/2	6-3/4	± 1/4	2-1/2	± 1/4
I. Width across glove $\frac{1}{2}$ in. $\pm \frac{1}{4}$ below wrist seam (palm side)	5	5-1/8	± 1/4	5	± 1/4

3.10 Workmanship. The finished gloves shall conform to the quality of product established by this specification and shall be free from defects which may effect durability, serviceability and appearance. The occurance of defects shall not exceed the acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless specified in the contract or purchase order, the supplier is responsible for all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for defects in table VI and specified dimensions. The preproduction sample shall be tested in accordance with 4.3.1.1 except weight and shrinkage.

4.3 Inspection. Inspection shall be in accordance with MIL-STD-105.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.3.1.1 Fabric testing. The fabric shall be tested for the characteristic in table V and tests shall be in accordance with CCC-T-191, wherever applicable. Testing for all requirements listed in table V are applicable to the sample unit. The sample size shall be as follows:

Lot size (yards)	Sample size
800 or less	2
801 up to including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any requirements specified.

TABLE V. Fabric components tests

Component	Characteristic	Requirement reference	Test Method
Cotton rib knit (cuff fabric) for style I and III	Material identification	3.2.2.1	1200 A/
	Type of knit	3.2.2.1	Visual A/
	Weight (yds. per lb.)	Table II	5041
	Wales per in.	Table II	5070 A/
	Courses per in.	Table II	5070 A/
	Width (flat)	Table II	5020 2/
Laminated fabric (type II only) face fabric	Material identification	3.2.2.2	1200 A/
	Weight (oz. per sq. yd.)	3.2.2.2	5041 A/
	Weave	3.2.2.2	Visual
Backing fabric	Material identification	3.2.2.2	1200 A/
	Weight (oz. per sq. yds.)	3.2.2.2	5040 A/
	Weave	3.2.2.2	Visual
Finished Laminated fabric Canton flannel	Total weight	3.2.2.2	5041
	Weave	3.2.1	Visual
	Weight (oz. per sq. yd.)	Table I	5041
	Yarns per inch:	Table I	5050
	Warp		
	Fill		
	Breaking strength:	Table I	
	Warp		5100 1/
	Fill		5100 1/
	Shrinkage (type III only)	3-2.1.1	5550 1/
	Material identification	3.2.1	1200 A/

A/ A supplier's certificate of compliance will be accepted for this characteristic .
1/ One determination shall be made from each sample and results reported as "pass or fail".
2/ Test results shall be reported to the nearest ½ inch.

4.3.2 Inspection of the end item.

4.3.2.1 Examination of the end item. The gloves shall be examined for defects listed in table VI. The sample unit shall be one glove and selection shall be pairs. The sample unit for pairing defects shall be classified as a single defect. The sample size shall be in accordance with inspection level II and the AQL shall be 4.0 major and 10.0 total (major and minor combined) defects per hundred units. The lot size shall be expressed in units of one glove each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Pairing	Not properly mated, e.g., not right and left of the same style	X	
	Not tacked together or not as specified		X
Cleanliness	Permanent spot, stain or foreign matter	X	
	Removable spot, stain or foreign matter clearly noticeable		X
Style	Not style glove specified	X	
Knitted cotton tubing (style I and III)	Any hole, cut, tear, dropped stitch, or run:		
	Seriously affecting serviceability	X	
	Not affecting serviceability seriously		X
	Slubby yarn		X
	Any thin area or mend		X
	Not seamless	X	
	Not double thickness of material	X	
Laminated fabric (style II)	Any cut, hole, tear burn:		
	Seriously affecting serviceability	X	
	Not seriously affecting serviceability		X
	Any evidence of delamination		X
	Any slub, or wrinkle		X
Canton flannel	Any cut, hole, tear, or rip:		
	Seriously affecting serviceability	X	
	Not seriously affecting serviceability		X
	Not napped	X	
Construction and workmanship	Any component omitted, misplaced, or operation omitted:		
	Seriously affecting serviceability, e.g., fingers badly twisted or distorted	X	
	Not seriously affecting serviceability		X
	Needle chew	X	
	Not assembled as specified:		
	Seriously affecting serviceability	X	
	Not seriously affecting serviceability		X
Seams and stitching	Any open seam (see note)	X	
	Note: One or more broken or two or more continuous skipped or runoff stiches on a seam constitute an open seam.		
	Looper thread exposed on outside of glove when 401 stitch type is used		X
	Not specified seam or stitch type	X	
	Loose stitch tension resulting in a loosely secured seam	X	
	Tight tension resulting in cutting of fabric or breaking of stitches when normal pull is applied	X	
	Any row stitching omitted	X	
	One or two stitches per inch less than specified		X
	Three or more stitches per inch less than specified	X	
	More than specified number of stitches per inch, but not damaging material		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE VI (continued)

Examined	Defect	Classification	
		Major	Minor
	More than specified number of stitches per inch damaging material	X	
	Gauge of stitching irregular or not as specified		X
	End of seam or stitching (stitch type 301) not caught in other seam or stitching, back tacked less than 1/2 inch		X
	End of seam produced with 401 stitch type not caught in other seam or stitching, having chain extending less than 1/2 inch or more than 3/4 inch beyond each end		X
	End of seam produced with 401 stitch type not caught in other seam or stitching, not having chain extend beyond each end	X	
Finishing	Loose threads not trimmed throughout glove		X
	Not neatly laid off, i.e., glove is wrinkled or does not otherwise present a neat appearance		X
Label	Missing, incomplete, incorrect, not legible, not specified type, not in specified location		X

4.3.2.2 **Dimensional examination. The gloves shall be examined for dimensional defects. Any dimension that is not within the tolerance specified in table IV shall be classified as a defect. The sample size shall be in accordance with inspection level S-3. The acceptable quality level (AQL) shall be 4.0 defects per hundred units. The sample unit shall be one glove. The lot size shall be expressed in terms of one glove.**

4.3.3 **Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking** comply with the requirements of section 5. Defects will be scored as listed in table VII. The lot shall be the number of containers offered for delivery at one time. The sample unit shall be one shipping container fully prepared for delivery except it need not be sealed. The inspection level shall be S-2 with an AQL of 2.5 defects per hundred units. Examination for closure and strapping shall be in accordance with applicable box specifications.

TABLE VII. Classification of preparation for delivery defects.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing
	Any component damaged, or otherwise defective
	Any component not as specified
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose taping or strapping, inadequate stapling
	Bulging or distortion of containers
Content	Number of bundles per container is more or less than required
	Number of gloves per bundle is more or less than required 1/

1/ For this defect, three (3) bundles shall be examined from each shipping container in the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.4 Certificate of compliance. The supplier shall submit a certificate of compliance to the contracting officer stating that the glove material characteristics have been tested and meet the indicated requirements in table V.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.1).

5.1.1 Level A and B. Each pair of gloves shall be fastened together in accordance with industry practice. Twelve pairs of gloves shall be packaged in a box conforming to PPP-B-566, PPP-B-665, PPP-B-676, or PPP-B-636. The box shall be closed in accordance with the appendix to the applicable specification.

5.1.2 Level C. Gloves shall be packaged in accordance with the suppliers commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.1).

5.2.1 Level A. Unit packages in quantities as specified (see 6.1) shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. The box shall be waterproofed, strapped, and closed in accordance with the appendix to the box specification.

5.2.2 Level B. Twelve unit packages shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. Unit packages shall be packed to insure carrier acceptance and safe delivery at destination at the lowest rates in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by contract or order, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to markings required by the contract or order, the unit packages shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Style required (see 1.2).
(c) Availability of sample (see 3.1).
(d) Whether preproduction sample is required (see 3.1.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) Quantity required in shipping container (see 5.2.1).

6.2 Samples. For access to guide sample, address the procuring activity issuing the invitation for bids (see 3.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

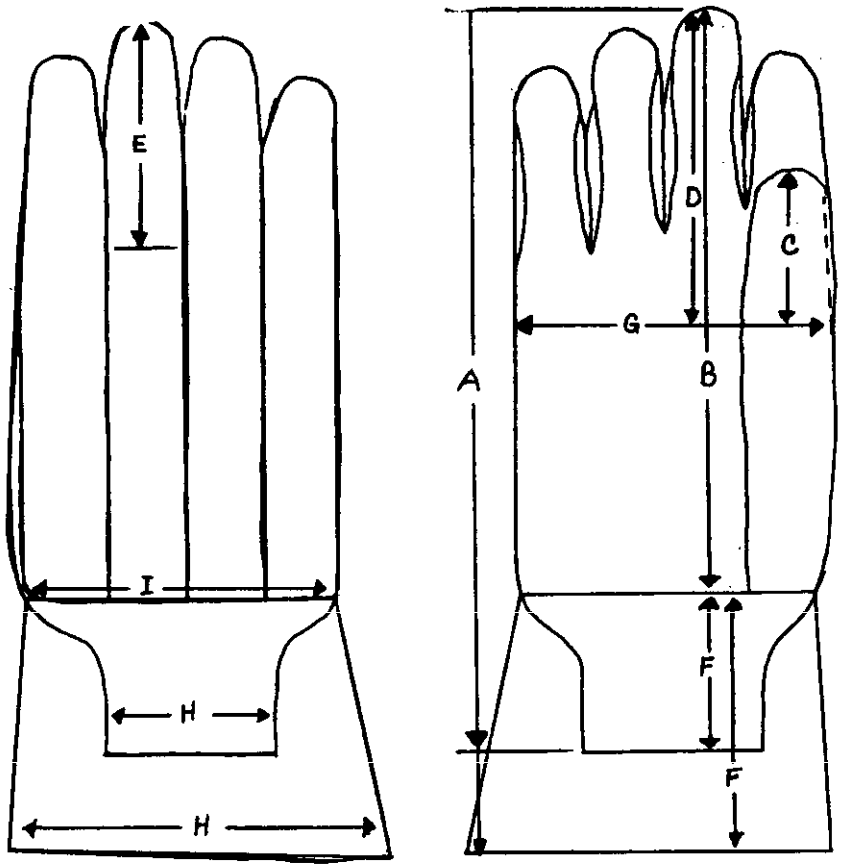


FIGURE 1 - GLUTE PATTERN

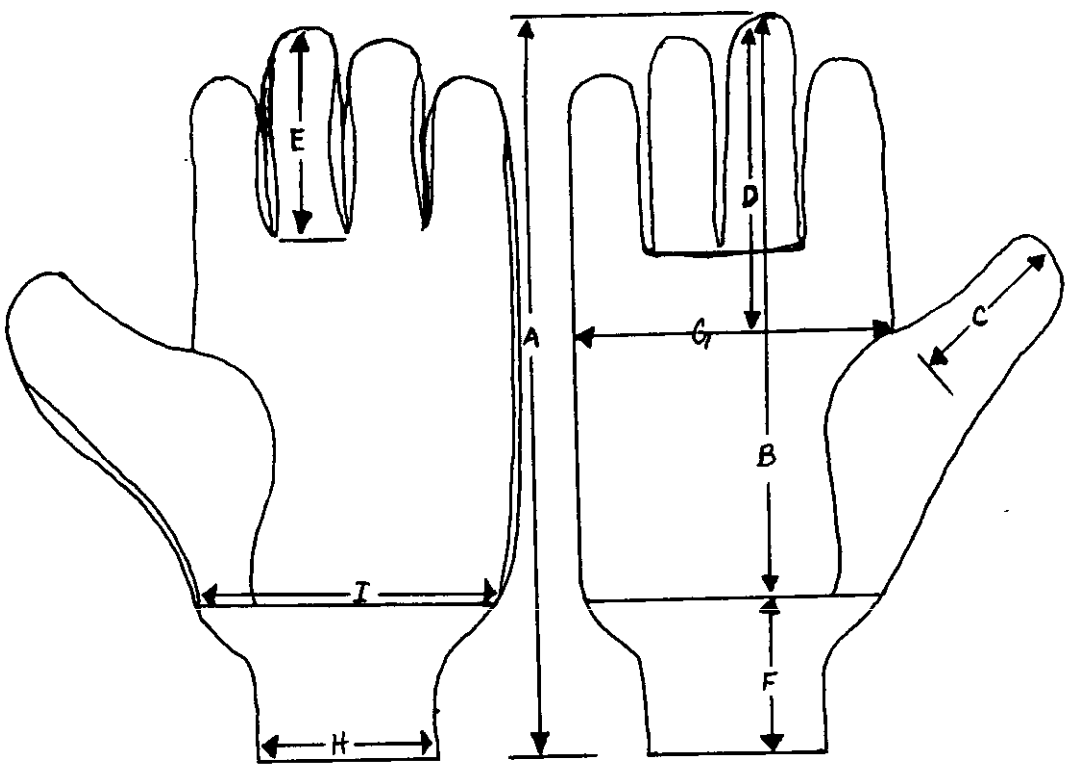


FIGURE 2 - GUNN PATTERN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.