JJ-G-451G
July 1, 1976
SUPERSEDING
Fed. Spec. JJ-G-451F
March 22, 1973

FEDERAL SPECIFICATION

GLOVES, CLOTH, LEATHER PALM

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers men's and women's cotton gloves with leather palms and having a gauntlet or knitted wristlet.

1.2 Classification.

1.2.1 Types, classes, and styles. The gloves shall be of the following types, classes, and styles, as specified (see 6.2).

Type I - Gauntlet.

Class 1 - Men's ("M" size).

Style A- 5-inch length gauntlet.
Style B- 2-1/2-inch length gauntlet.
Style C- 2-1/2-inch length gauntlet with knuckle reinforcement.
Style D- 5-inch length gauntlet with knuckle reinforcement.

Type II - Knitted wristlet.

Class 1 - Men's ("M" size).
Class 2 - Women's ("W" size).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

Federal Specifications:

V-T-276	-	Thread, Cotton.
KK-L-162	-	Leather, Cattlehide, Chrome Tanned for Gloves, Garments, and Equipage.
UU-P-268	-	Paper, Kraft, Wrapping.
CCC-C-458	-	Cloth, Flannel, Cotton.
DDD-B-1199	-	Binding Textile, Cotton, Bias-Cut.
DDD-L-20	-	Label; For Clothing, Equipage and Tentage (General Use).
PPP-B-636	-	Boxes, Shipping, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).
Fed. Test Method Std. No. 191 - Textile Test Methods.
Fed. Test Method Std. No. 311 - Leather, Methods of Sampling and Testing.
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to suppliers (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 Material.

3.2.1 Leather. The leather shall be cattlehide flesh splits conforming to type IV, of KK-L-162.

3.2.1.1 Thickness. The thickness of leather parts of the gloves shall be as follows, except that the thickness of the welting for both the men's and women's gloves shall be not less than 1-1/2 ounces nor more than 2 ounces (see 4.2.3.2). (Note: One ounce is equivalent to 1/64 inch.)

Men's gloves (class 1).

Minimum - 3 ounces.
Maximum - 3-1/2 ounces.

Women's gloves (class 2).

Minimum - 2-1/2 ounces.
Maximum - 3 ounces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.2.1.2 Color of leather. The color of all leather components shall be cream or light (pearl) gray. All leather components used in each pair of gloves shall be of the same color.

3.2.2 Cloth, cotton, flannel, canton. The flannel for the back of the gloves shall conform to the requirements of type IV class 5 cloth of CCC-C-458.

3.2.3 Flannel lining. The flannel lining for the palm, fingers, and thumb of types I and II gloves shall be a napped cotton flannel, conforming to the requirements of type IV, class 2 of CCC-C-458.

3.2.4 Knitted cotton tubing for wristlet (type II, gloves). The tubing for the wristlet shall be made of a 1 by 1 rib-knit, seamless cotton tubing. The tubing for class 1 wristlets shall weigh not less than 9 nor more than 12 yards per pound, having a width not less than 3 inches, and a minimum of 14 wales and 20 courses per inch. The tubing for class 2 wristlets shall weigh not less than 12 nor more than 14 yards per pound, having a width not less than 2-1/4 inches, and a minimum of 14 wales and 20 courses per inch (see 4.2.1.1).

3.2.5 Laminated fabric for gauntlet (type I glove). The finished fabric shall be composed of two thicknesses of unbleached cotton fabric securely laminated together. The face fabric shall be a cotton twill or drill weighing not less than 3.7 ounces per square yard and the back fabric shall be a cotton plain weave weighing not less than 1.7 ounces per square yard. The finished fabric shall contain not less than 14 ounces per square yard of natural rubber, synthetic rubber, or synthetic resin. The total weight of the finished fabric shall be not less than 19.4 ounces per square yard (see 4.2.1.1).

3.2.6 Thread. The thread for stitching and seaming shall be ticket No. 20, 4 ply; ticket No. 30, 4 ply; and ticket No. 50, 3 ply unbleached cotton thread, as indicated in table I and shall conform to type IA1 or IB1 of V-T-276.

3.2.7 Binding. The binding shall be 1 inch width bias-cut binding conforming to type I, class 1, bleached, or class 2, dyed of DDD-B-1199. Also acceptable will be unbleached bias-cut binding conforming to type I of DDD-B-1199, except that the minimum yarns per inch requirement shall apply only to the sum of the warp yarns per inch and filling yarns per inch. When dyed binding is used, the color shall approximate the color of the leather. The colorfastness requirements of DDD-B-1199 shall not apply.

3.2.8 Label. Each glove shall be marked with a combination size and identification label conforming to type III or IV, class 4 of DDD-L-20. The size shall be represented by "M" for Men's and "W" for Women's. The label shall show good fastness to laundering as specified DDD-L-20. The label shall include the information required by the applicable products labeling act.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.3 Design. The gloves shall be a Gunn cut pattern, leather palm with canton flannel back. Type I shall have a gauntlet and type II shall have a knitted wristlet (see figure 1).

3.4 Patterns The dies and patterns for cutting all parts of the gloves shall be furnished by the supplier and shall be of the proper proportions to provide good fitting gloves conforming to finished measurements in table II.

3.5 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the illustrations, the written specification shall govern.

3.6 Construction.

3.6.1 Manufacturing operations requirements. The gloves shall be manufactured in accordance with the operation requirements specified in table I. The supplier is not required to follow the exact sequence of operations.

3.6.1.1 Stitches, seams and stitchings. Stitches, seams and stitching types specified in table I shall conform to FED-STD-751. Whenever two or more methods, seams, or stitch types are given for the same operation, any one may be used. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.6.1.2 Type 301 stitching. Unless otherwise indicated, ends of seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backstitched not less than 1/2 inch. Thread tension shall be maintained so there will be no loose stitching resulting in a loose bobbin or top thread or no excessively tight stitching resulting in puckering of the materials sewn.

3.6.1.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching.

b. Thread breaks, or two or more consecutive skipped stitches or run-offs noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch back of the defective area, continue over the defective area and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching without damaging the material and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.6.1.3 Type 401, 504 and 505 stitching. Thread tension shall be maintained so that there will be no loose stitching. Where stitch type 401 is used, the looper thread shall be on the inside of the gloves. Both ends of all seams or stitching produced with 401 stitch type, when not caught in other seams or stitching shall have a 1/2 to 3/4 inch chain extending beyond each end. All repairs shall be in accordance with 3.6.1.2.1 a. and 3.6.1.3.1 b.

3.6.2 Cutting. The leather shall be block or clicker cut. The leather components of the glove shall consist of the following pieces:

(1) Palm, front of index and small finger, underside of thumb (and gauntlet reinforcement extension for type I glove) (1 piece).
(2) Back of thumb (1 piece).
(3) Front of middle and ring fingers (Fourchette) (1 piece).
(4) One strip of welting for insertion along base of middle and ring fingers (1 piece).
(5) Four tips for back of fingers (4 pieces).
(6) Knuckle reinforcement piece (1 piece) (for type I, class 1, styles C D only).

3.7 Measurements. The finished gloves shall conform to the measurements specified in table II.

3.8 Replacement of defective components. During the spreading, cutting and manufacturing process components having material defects or damages that are classified as defects in 4.2.3.1 and 4.2.3.2 shall be removed from production and replaced with non-defective and properly matched components.

3.9 Workmanship. The finished gloves shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptance quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE I	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
1.	Join fourchettes to palm.						
	Join leather fourchettes to palm inseaming with one row of stitching, 1/8 to 3/16 inch margin. The leather welting strip shall be securely caught in the seam joining the fourchettes to the palm. The welt shall extend on the outside of glove not less than 1/16 nor more than 3/16 inch from the fourchette stitching. The ends of the welt shall be 3/8 ± 1/8 inch from the closing seam. At supplier's option the welting may be positioned by basting prior to stitching.	301 or 401	SSa-1 SSa-1	8-10 8-10	20-4 20-4	20-4 30-4	
2.	Join back of thumb to underside of thumb and palm.						
	The back of the leather thumb shall be inseam sewn to the underside of thumb and leather palm with one row of stitching 1/8 to 3/16 inch margin.	301 or 401	SSa-1 SSa-1	8-10 8-10	20-4 20-4	20-4 30-4	
3.	Attach flannel lining.						
	The leather palm, front and back of thumb, and fingers are to be lined with flannel, as specified in 3.2.3. The flannel shall be securely caught in the cuff joining seams, the closing side seam starting at the cuff joining seam and continuing for a distance of not less than 1-1/2 inches from the cuff joining seam. The flannel shall also be caught in the palm joining seam from cuff joining to within no less than 3/4 inch of the thumb crotch. The lining shall be securely sewn to the entire curvature of the finger tips and to the entire curvature of the tip of the back of the thumb. The lining on the front of the thumb shall be caught in the seam joining the front and back of the thumb to within not less than 1/2 inch of the thumb crotch.	301 or 401	SSa-1 SSa-1	8-10 8-10	20-4 20-4	20-4 30-4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE I	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
4.	Attaching knuckle reinforcement piece (style C and D only).						
	The leather knuckle reinforcement piece shall be superimposed on the back of the glove and stitched with one row of stitching along top and bottom edges, 1/16 to 3/16 inch from edge. The ends of the reinforcement piece shall be caught in the side seams joining the palm to the back.	301 or 401	SSau-2	8-10	20-4	20-4	
5.	Join palm to back.						
	Join the leather on thumb side by lapping the leather over the canton flannel and sewing them with a double row of stitching 1/16 to 3/16 inch gage.	301 or 401	LSa-2 LSa-2	8-10 8-10	20-4 20-4	20-4 30-4	
6.	Attach leather finger tips.						
	The leather tips shall be stitched to canton flannel across the back of each finger 1-1/4 ± 1/8 inches down from tip of finger with one row of stitching 1/16 to 3/16 inch margin. The edges of the leather tips shall be caught in the closing seams.	301 or 401	LSa-1 LSa-1	8-10 8-10	20-4 20-4	20-4 30-4	
7.	Closing.						
	The closing shall be full inseamed, 1/8 to 3/16 inch from cut edge.	301 or 401	SSa-1 SSa-1	8-10 8-10	20-4 20-4	20-4 30-4	

STSNL Form 903
27 Jul 73 EDITION OF 16 JUN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
8.	Attaching gauntlet reinforcement extension (type I only).						
	The sides and top of the leather gauntlet reinforcement extension shall be stitched to the outside of the palm side of the gauntlet with one row of stitching using a 1/16 to 3/16 inch margin. The bottom area of the reinforcement extension shall be caught in the seam joining cuff gauntlet to hand portion.	301	SSa-1	8-10	20-4	20-4	
		or 401	SSa-1	8-10	20-4	30-4	
9.	Type I, (gauntlet cuff).						
	(a) The gauntlet shall consist of one piece cut from two thicknesses of laminated cotton fabric (see 3.2.5).						
	(b) The bottom edge (edge attached to wrist) of gauntlet shall be overedge stitched with 3/16 to 1/4 inch stitching gage.	504	EFd-1	6-8	30-4	30-4	
		or 505	EFd-1	6-8	30-4	30-4	
	(c) Lap the gauntlet over the entire hand portion of the glove at the wrist, except for the area where the gauntlet reinforcement extension overlaps the gauntlet, then attach gauntlet to the hand with a double row of stitches 1/8 to 3/16 inch gage.	301	LSa-2	8-10	20-4	20-4	
		or 401	LSa-2	8-10	20-4	30-4	
	(d) Bind top edge (edge at open end of glove) of gauntlet cuff with raw edges of binding turned in 3/16 to 1/4 inch and caught within the seaming.	301	BSc-1	8-10	30-4	30-4	
		or 401	BSc-1	8-10	30-4	50-3	
10.	Type II, (knitted wristlet).						
	The knitted cotton tubing shall be cut to a sufficient length to permit the wristlet to be formed double thickness by folding over and inseaming the bottom edge of wristlet to top of hand portion at wrist with a double row of stitching 1/8 to 3/16 inch between rows with 1/4 to 3/8 inch seam allowance.	301	SSa-2	8-10	20-4	30-4	
		or 401	SSa-2	8-10	20-4	30-4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE I	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
11.	Label. Apply label to back outside of cuff of type I glove and on back outside of hand part of type II glove.						
12.	Forming. All gloves shall be formed on heated forms. Thumbs and seams shall be worked out over the forms.						
13.	Pairing. Match and pair gloves. Tack each pair of gloves together with not less than 2 stitches using a cord thread which will permit the pair to be separated without tearing the fabric. As an alternate, the type I gloves only may be tacked with a soft metal, non-corrosive staple provided the gloves can be separated without damaging the fabric. Type I gloves shall be tacked at closing seam of gauntlet, 1/2 to 1 inch from top of gloves. Type II gloves shall be tacked 1-1/4 to 1-1/2 inches from edge of knitted cuff and 1/2 to 1 inch from top of gloves.						

STSNL Form 903
27 Jul 73 EDITION OF 16 JUN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II. Measurements 1/

Location	Types: I Class 1 Style A and D	Types: I Class 1 Style B and C	Types: II Class 1	Types: II Class 2	Tolerance: Plus or minus
	Inches	Inches	Inches	Inches	Inch
A Over-all length, tip of 2nd finger to top of cuff	12-1/2	10	10-1/4	10	1/2
B Hand length, top of 2nd finger to wrist seam	7-1/2	7-1/2	7-1/2	7-1/4	1/4
C Length of thumb, crotch to tip	3-1/8	3-1/8	3-1/8	2-3/4	1/8
D Reach, base of thumb to top of 2nd finger	5-1/2	5-1/2	5-1/2	5-1/8	1/2
E Length of 2nd finger, crotch to tip Length of other fingers to be proportioned in accordance with commercial practice	3-1/2	3-1/2	3-1/2	3-1/4	1/8
F Length of tips on back	1-1/4	1-1/4	1-1/4	1-1/4	1/8
G Length of cuff, top to wrist seam	5	2-1/2	2-3/4	2-3/4	1/8
H Width of gauntlet reinforcement piece	3-1/4	3-1/4	-	-	1/2
I Width of glove at thumb	5-1/4	5-1/4	5-1/4	4-1/2	1/4
J Width of cuff, top opening	7	6-1/2	3-1/4	2-1/2	1/4
K Depth of gauntlet reinforcement piece	1-3/4	1-3/4	-	-	1/4
L Width of knuckle reinforcement for type I, class 1, style C and D only	1-3/4	1-3/4	-	-	1/4

1/ See figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine validity of the certification.

4.2 Quality conformance inspection. Sampling for inspection shall be in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components as specified in 4.2.1.1.

4.2.1.1 Fabric testing. The fabrics shall be tested for the characteristics in table III and tests shall be in accordance with FED-STD-191, wherever applicable. The sample unit for testing the cotton rib knit fabric shall be 5 linear yards of tubing. The sample unit for testing the laminated fabric shall be 1/3 yards full width. Testing for all requirements listed in table III are applicable to the sample unit. The sample size shall be as follows:

Lot size (yards)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any requirements specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE III. Fabric component tests

Component	Characteristic	Requirement reference	Test method
Cotton rib knit (cuff fabric)	Material identification	3.2.4	1200 1/
For type II glove only	Type of knit	3.2.4	Visual 1/
	Weight (yards per lb.)	3.2.4	5041
	Wales per inch	3.2.4	5070 1/
	Courses per inch	3.2.4	5070 1/
	Width (flat)	3.2.4	5020
Laminated fabric: (For type I only)			
Face fabric	Material identification	3.2.5	1200 1/
	Weight (oz. per sq. yd.)	3.2.5	5041 1/
	Weave	3.2.5	Visual
Backing fabric	Material identification	3.2.5	1200 1/
	Weight (oz. per sq. yd.)	3.2.5	5041 1/
	Weave	3.2.5	Visual
Finished laminated fabric	Total weight (oz. per sq. yd.)	3.2.5	5041
Rubber or resin material	Weight (oz. per sq. yd.)	3.2.5	1/

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

4.2.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process has indicated non-conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.2.3 Examination of the end item. The defects found during examination of the end product shall be classified in accordance with 4.2.3.1 and 4.2.3.2. The applicable inspection levels and AQLS shall be as indicated in 4.2.3.3. The sample unit for this examination shall be one glove. Selection of the sample shall be by pairs. The sample unit for pairing defects shall be one pair. Defects for pairing shall be classified as a single defect. The lot size shall be expressed in terms of one glove each.

4.2.3.1 Visual examination of gloves. The gloves shall be examined for defects in pairing, color, design, construction, material workmanship, and marking as indicated in table IV.

TABLE IV. Classification of visual examination defects

Examine	Defect	Classification Major	Minor
Pairing	Not properly mated, e.g., not right and left of the same size	X	
	Badly shaded, wide variation in color		X
	Not tacked together or not tacked as specified		X
Cleanliness	Any spot, stain or foreign matter		X
Color	Not as specified in color		X
	Color not uniform		X
Type	Not type glove specified	X	
Leather	Not split cattlehide leather		X
	Loose, spongy, flanky, open scratch, thin spot or open vein:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Any hole, except pinhole, cut or tear	X	
	Three or more pinholes in a glove		X
	Not soft or pliable	X	
	Any scar, brittle, or bony area, abraded area		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of visual examination defects (cont'd)

Examine	Defect	Classification Major	Minor
Knitted cotton tubing (type II)	Any hole, cut, tear, dropped stitch, or run:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Slubby yarn		X
	Any thin area or mend		X
	Not seamless	X	
Laminated fabric (type I)	Any cut, hole, tear, burn:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Any evidence of delamination		X
	Any slub, or wrinkle		X
Flannel fabric	Any hole, cut, tear, or rip:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Not napped		X
	Broken or missing yarn, open place clearly visible		X
Construction and workmanship, general (applicable to all components unless otherwise indicated herein)	Any component omitted, misplaced, or operation omitted:		
	Seriously affecting serviceability, e.g., fingers badly twisted or distorted	X	
	Affecting serviceability, but not seriously		X
	Needle chew	X	
	Not assembled as specified:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
Seams and stitching	Any open seam:		
	- In a single stitched seam	X	
	- In both rows of a double stitched seam	X	
	- In one row of a double stitched seam		X
	- Repaired, but not repaired as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of visual examination defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Seams and stitching (cont'd)	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or run-offs occur.		
	Looper thread exposed on outside of glove when 401 stitch type is used		X
	Not specified seam or stitch type	X	
	Loose stitch tension resulting in a loosely secured seam	X	
	Tight tension resulting in cutting of leather or breaking of stitches when normal pull is applied	X	
	Any row of stitching omitted	X	
	One or two stitches per inch less than specified		X
	Three or more stitches per inch less than specified	X	
	More than the specified number of stitches per inch, but not damaging material		X
	More than the specified number of stitches per inch damaging material	X	
	Gauge of stitching irregular or not as specified		X
	End of seam or stitching (stitch type 301) when not caught in other seam or stitching, backtacked less than 1/2 inch.		X
	End of seam produced with 401 stitch type when not caught in other seam or stitching, having chain extending less than 1/2 inch or more than 3/4 inch beyond each end		X
	End of seam produced with 401 stitch type when not caught in other seam or stitching, not having chain extend beyond each end	X	
Welting	Not securely caught in seam	X	
	Width not uniform or does not protrude a uniform distance from seam		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of visual examination defects (cont'd)

Examine	Defect	Classification Major	Minor
Fit of parts	Any part or assembly not properly affixed:		
	Seriously affecting serviceability e.g., flannel lining wrinkled or excessive bulk in crotch of fingers	X	
	Affecting serviceability, but not seriously		X
Gauntlet reinforcement piece	Gauntlet reinforcement piece not stitched around sides and top edge	X	
Knuckle reinforcement piece	Knuckle reinforcement piece not securely caught in side seams	X	
Knitted wristlet	Not double thickness of material	X	
Finishing	Loose threads not trimmed throughout glove		X
	Not neatly laid off, i.e., glove is wrinkled or does not otherwise present a neat appearance		X
Markings	Missing, imcomplete, incorrect, not legible, not specified type or size, not in proper location or not accomplished in the specified manner		X

4.2.3.2 Dimensional examination. The gloves shall be examined for dimensional defects, including thickness of leather. Any dimension not within the specified tolerance shall be classified a defect.

NOTE: Each leather part of the glove shall be checked for thickness, i.e., thumb, body of glove, fourchettes, knuckle reinforcement and welts (where feasible). Any of these parts that are not within the required thickness range shall constitute a defect. Thickness shall be determined in accordance with Method 1011 of FED-STD-311. Where glove parts are lined, the lining should be parted from the leather and the thickness of the leather shall be taken doubled. The thickness is then divided by two.

4.2.3.3 Inspection levels and AQLS. The inspection levels and AQLS, expressed in defects per 100 units shall be as follows:

Examination	Inspection level	AQL Major	AQL Total
Par 4.2.3.1	II	4.0	10.0
Par 4.2.3.2	S-3	-	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.2.4 Inspection for preparation for delivery. An examination shall be made to determine whether packaging, packing, and marking complies with the section 5 requirements. Defects shall be scored in accordance with table V. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE V. Examination of preparation for delivery

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flap, loose strapping, improper taping and inadequate stapling. Bulged or distorted container.
Content	Number of bundles per container is more or less than required. Number of pairs of gloves per bundle is more or less than required. 1/

1/ For this defect, two bundles shall be examined from each shipping container in the sample.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Five pairs of gloves of like description only, shall be neatly stacked in a bundle with every other pair reversed end for end. Each bundle shall be secured at each end with cotton tape or twine.

5.1.2 Level C. Gloves shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. One hundred and twenty pairs of gloves of like description only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat and neatly arranged to form a balanced pack within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, water-proofed in accordance with method V, and reinforced as specified in the appendix of the container specification.

5.2.2 Level B. One hundred and twenty pairs of gloves of like description only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed flat and neatly arranged to form a balanced pack within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box specification.

5.2.3 Level C. Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military requirement. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

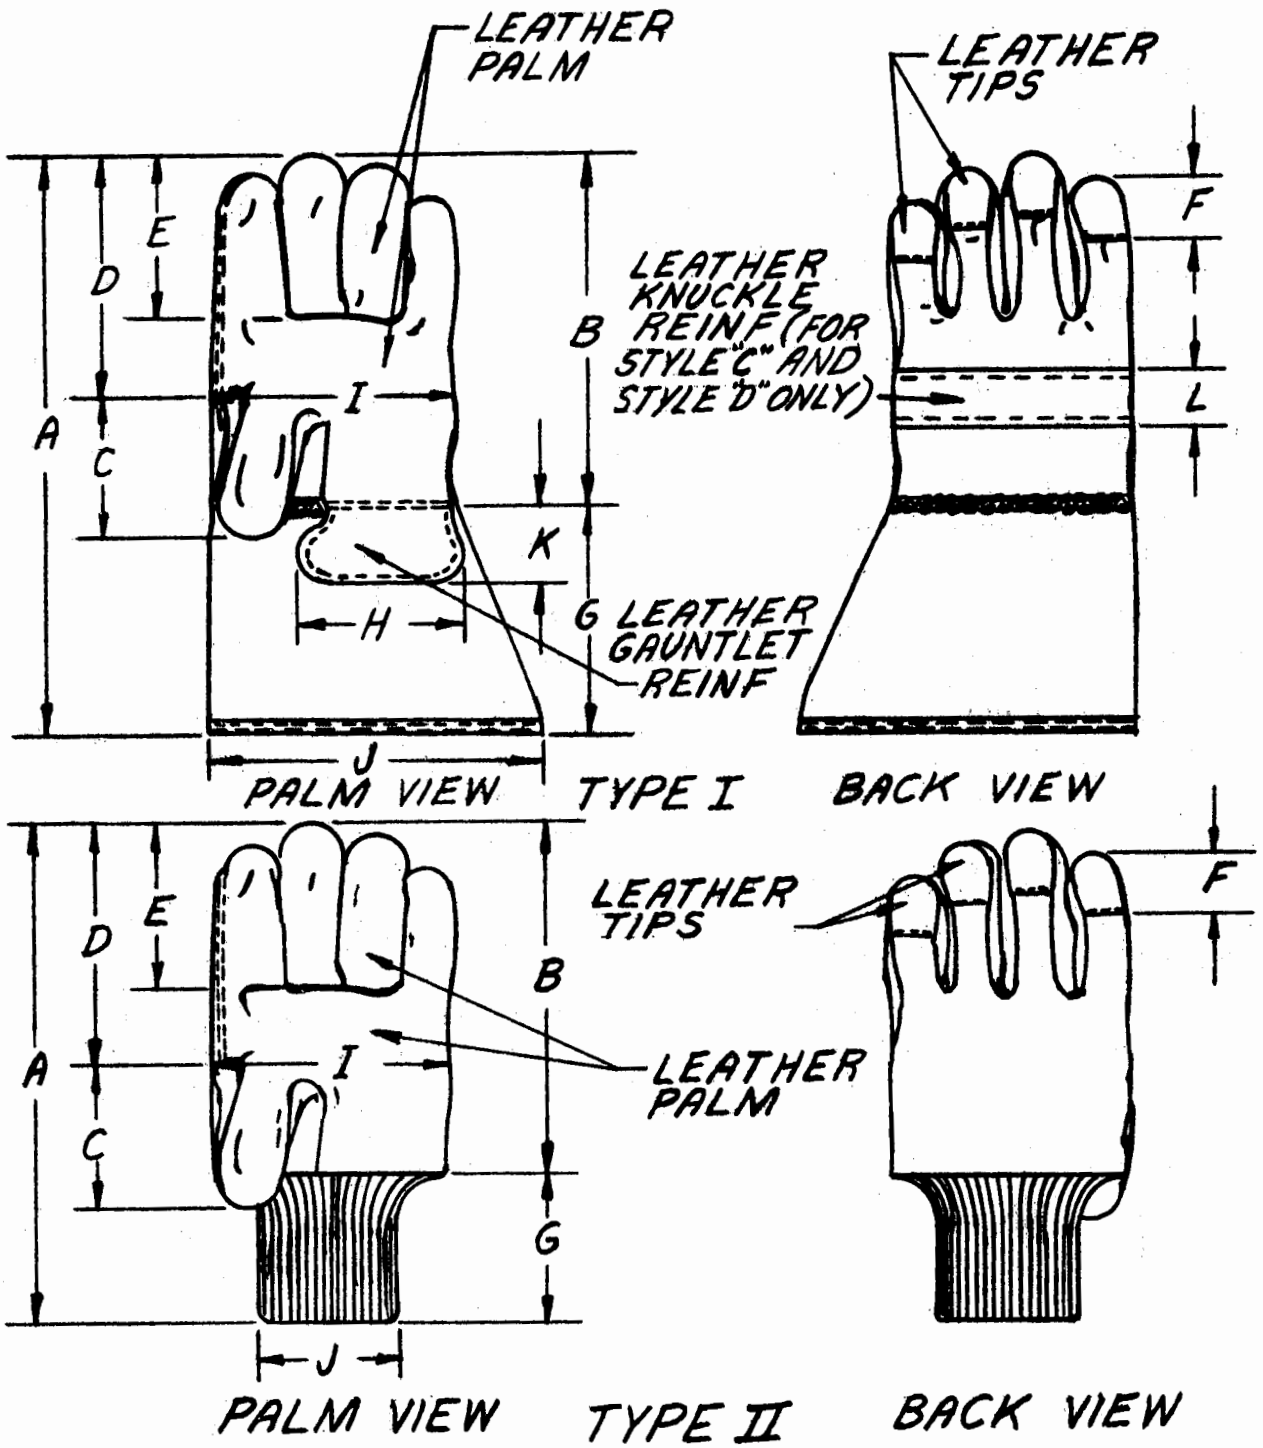


FIGURE 1. GLOVE, CLOTH, LEATHER PALM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The gloves are primarily work gloves for use by personnel of the Military services and civil Government agencies.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Type, class, and style required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) Marking required (see 5.3).

6.3 Sample. For access to the guide sample, address the procurement office issuing the invitation for bids.

Custodians:

Army - GL

Review activities:

Army - MD
DSA - CT

User activities:

Navy - MC, YD

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

JUS-FPI
AFS
GSA-FSS

Project No. 8415-0004

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.