
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A (FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

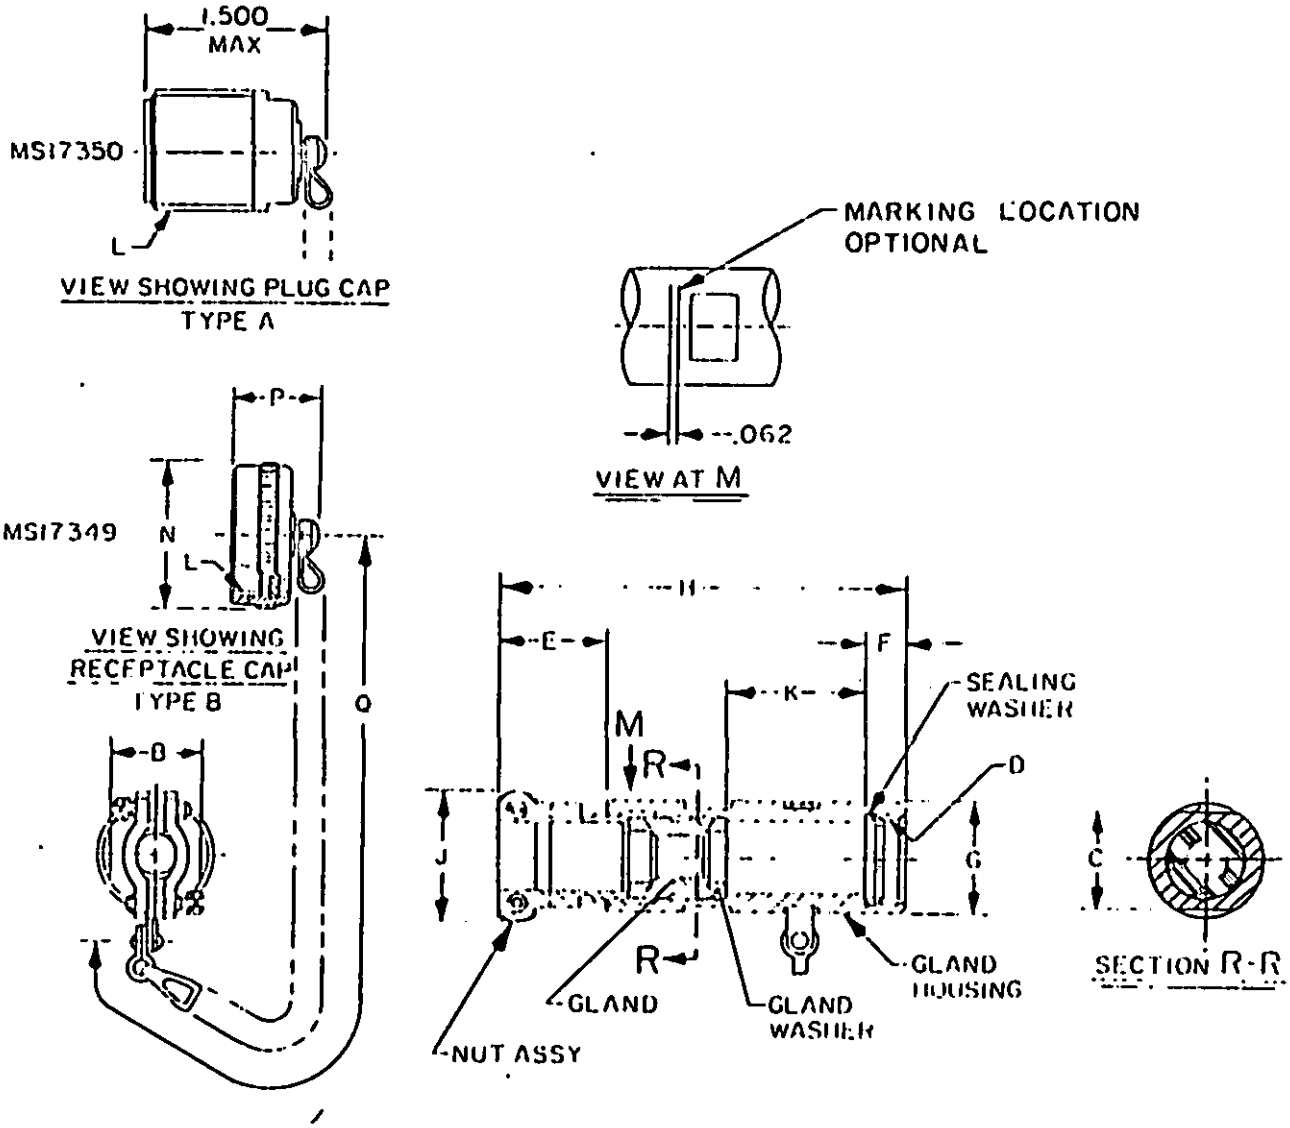

Configuration A. Style 1 cable sealing.

FIGURE 1. Configurations and dimensions.

Ⓐ denotes changes

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: http://assist.dla.mil -- Downloaded: 2020-01-02
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	M	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	+.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
1	12	.375	.281	.750	.812	.7500-20 UNEF	.969	.479	.938	3.365	1.062	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	.281	.188	.750	.812	.7500-20 UNEF	.969	.479	.938	3.365	1.062	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
3	14	.438	.344	.875	.938	.9750-20 UNEF	.969	.479	1.062	3.678	1.125	.871	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
4	16	.605	.511	1.000	1.062	1.0000-20 UNEF	1.062	.479	1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
5	16	.530	.436	1.000	1.062	1.0000-20 UNEF	1.062	.479	1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
6	16	.405	.311	1.000	1.062	1.0000-20 UNEF	1.062	.479	1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
7	18	.625	.531	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
8	18	.699	.605	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
9	18	.500	.406	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.552	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
10	18	.455	.361	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
11	20	.828	.715	1.188	1.250	1.2500-18 NEF	1.125	.479	1.438	4.515	1.688	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
12	20	.562	.449	1.188	1.250	1.2500-18 NEF	1.125	.479	1.438	4.615	1.688	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
13	22	.750	.637	1.312	1.375	1.3750-18 NEF	1.094	.479	1.562	4.647	1.812	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
14	22	.900	.787	1.312	1.375	1.3750-18 NEF	1.094	.479	1.562	4.647	1.812	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00

Configuration A. Style 1 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-02-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	+.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
15	22	.805	.692	1.312	1.375	1.3750-18 NEF	1.094	.479	1.562	4.647	1.812	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
16	24	1.055	.930	1.546	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
17	24	1.000	.675	1.546	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
18	24	1.109	.984	1.546	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
19	24	.880	.755	1.546	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
20	28	1.180	1.055	1.780	1.875	1.8750-16 UN	1.281	.479	2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
21	28	1.230	1.105	1.780	1.875	1.8750-16 UN	1.281	.479	2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
22	28	1.310	1.185	1.780	1.875	1.8750-16 UN	1.281	.479	2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
23	32	1.455	1.320	2.000	2.062	2.0625-16 UNS	1.281	.479	2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
24	32	1.531	1.406	2.000	2.062	2.0625-16 UNS	1.281	.479	2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
25	32	1.375	1.250	2.000	2.062	2.0625-16 UNS	1.281	.479	2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
26	36	1.656	1.531	2.250	2.312	2.3125-16 UNS	1.281	.479	2.562	5.083	2.953	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
27	36	1.562	1.437	2.250	2.312	2.3125-16 UNS	1.281	.479	2.562	5.083	2.953	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
(A) 28	44	2.250	2.105	2.875	2.750	2.8750-16 UN	1.382	.667	3.125	6.471	3.500	2.219	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
(A) 29	44	2.170	2.025	2.875	2.750	2.8750-16 UN	1.382	.667	3.125	6.471	3.500	2.218	3.0000-0.1P-0.2L-DS	3.217	.980	6.00

Configuration A. Style 1 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T10:10Z
Check the source to verify that this is the current version before use.

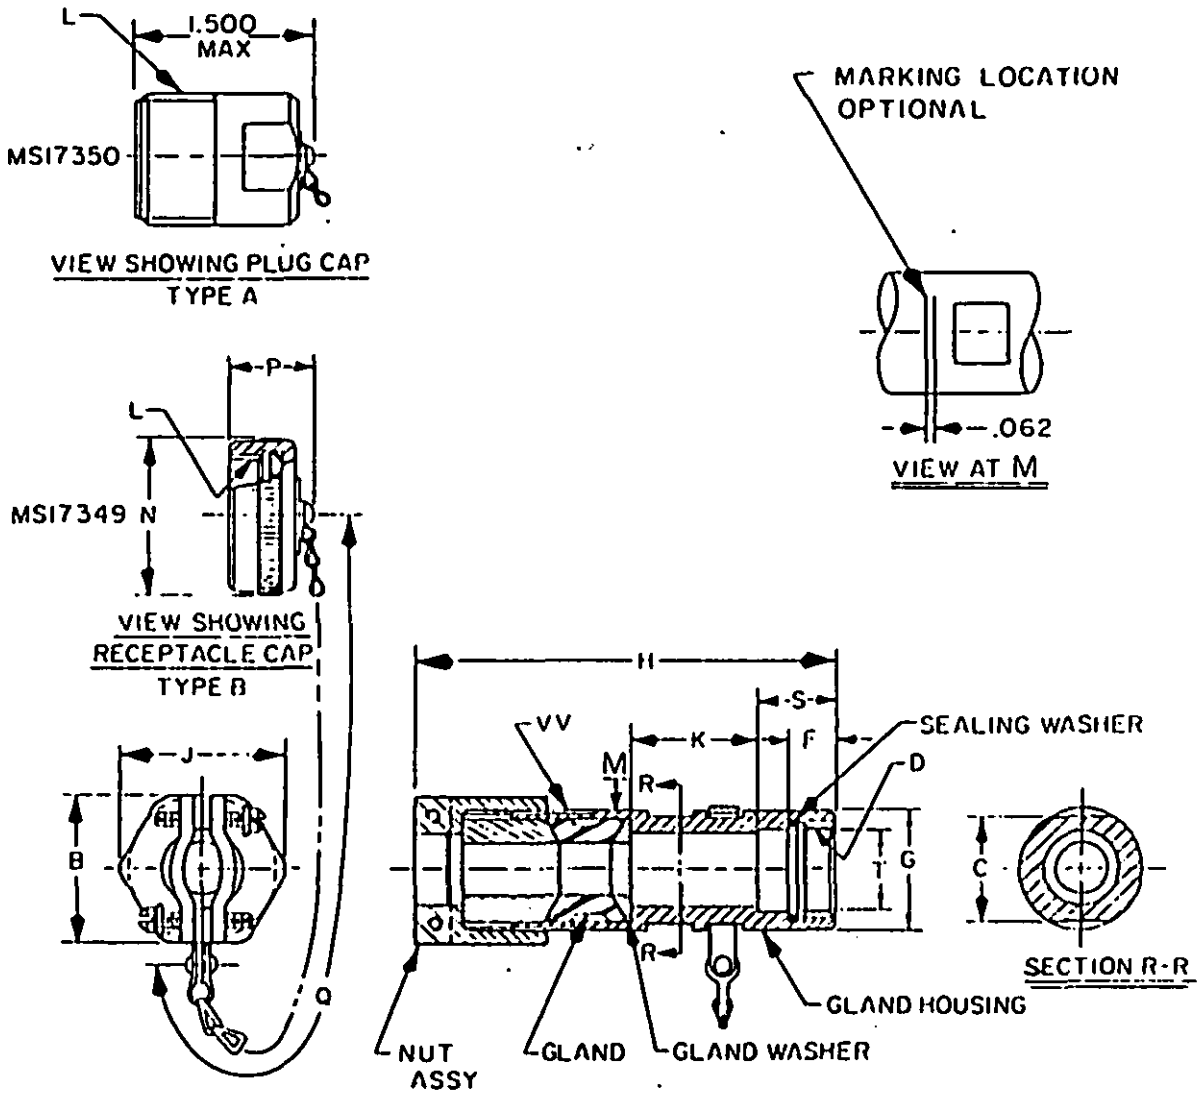

Configuration B. Style 2 cable sealing.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range Max	Cable range Min	B ±.005	C +.000 -.010	D Thread Class 2B-LH	F ±.016	G Dia +.010 -.020	H Max	J Max	K ±.010
1	12	.396	.246	1.094	.812	.7500-20 UNEF	.479	.938	4.000	1.110	.950
2	14	.521	.321	1.129	.938	.8750-20 UNEF	.479	1.062	4.100	1.320	1.075
3	16	.646	.446	1.344	1.062	1.0000-20 UNEF	.479	1.188	4.400	1.420	1.200
4	18	.765	.565	1.469	1.125	1.1250-18 UNEF	.479	1.312	4.900	1.600	1.325
5	20	.890	.690	1.625	1.250	1.2500-18 UNEF	1.438	1.188	4.900	1.750	1.325
6	22	1.015	.815	1.750	1.375	1.3750-18 UNEF	.479	1.562	4.900	1.900	1.325
7	24	1.180	.980	2.000	1.625	1.6250-18 NEF	.479	1.812	5.000	2.190	1.450
8	28	1.430	1.230	2.250	1.875	1.8750-16 UN	.479	2.062	5.300	2.475	1.700
9	28	1.230	1.030	2.250	1.875	1.8750-16 UN	.479	2.062	5.300	2.475	1.700
10	32	1.670	1.430	2.500	2.062	2.0625-16 N	.479	2.312	5.600	2.715	1.950
11	36	1.860	1.660	2.750	2.312	2.3125-16 N	.479	2.562	5.600	2.900	1.950
12	40	2.110	1.860	3.062	2.562	2.6250-16 UN	.667	2.875	5.725	3.250	1.950

Configuration B. Style 2 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 20260-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link	S ±.010	T Dia ±.005	VV Gland threads class 2-LH
1	12	.8750-0.1P-0.2L-DS	1.094	.765	5.00	1.425	.600	.9375-20 UNEF
2	14	1.0000-0.1P-0.2L-DS	1.219	.765	5.00	1.425	.726	1.0625-18 UNEF
3	16	1.1250-0.1P-0.2L-DS	1.344	.980	5.00	1.605	.845	1.1875-18 NEF
4	18	1.2500-0.1P-0.2L-DS	1.469	.980	5.00	1.605	.970	1.3125-18 NEF
5	20	1.3750-0.1P-0.2L-DS	1.562	.980	5.00	1.605	1.095	1.4375-18 NEF
6	22	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.5625-18 NEF
7	24	1.7500-0.1P-0.2L-DS	1.938	.980	6.00	1.605	1.470	1.8125-16 N
8	28	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	2.0625-16 N
9	28	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	2.0625-16 N
10	32	2.2500-0.1P-0.2L-DS	2.469	.980	6.00	1.605	1.900	2.3125-16 N
11	36	2.5000-0.1P-0.2L-DS	2.719	.980	6.00	1.605	2.150	2.5000-16 UN
12	40	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.8750-16 UN

Configuration B. Style 2 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

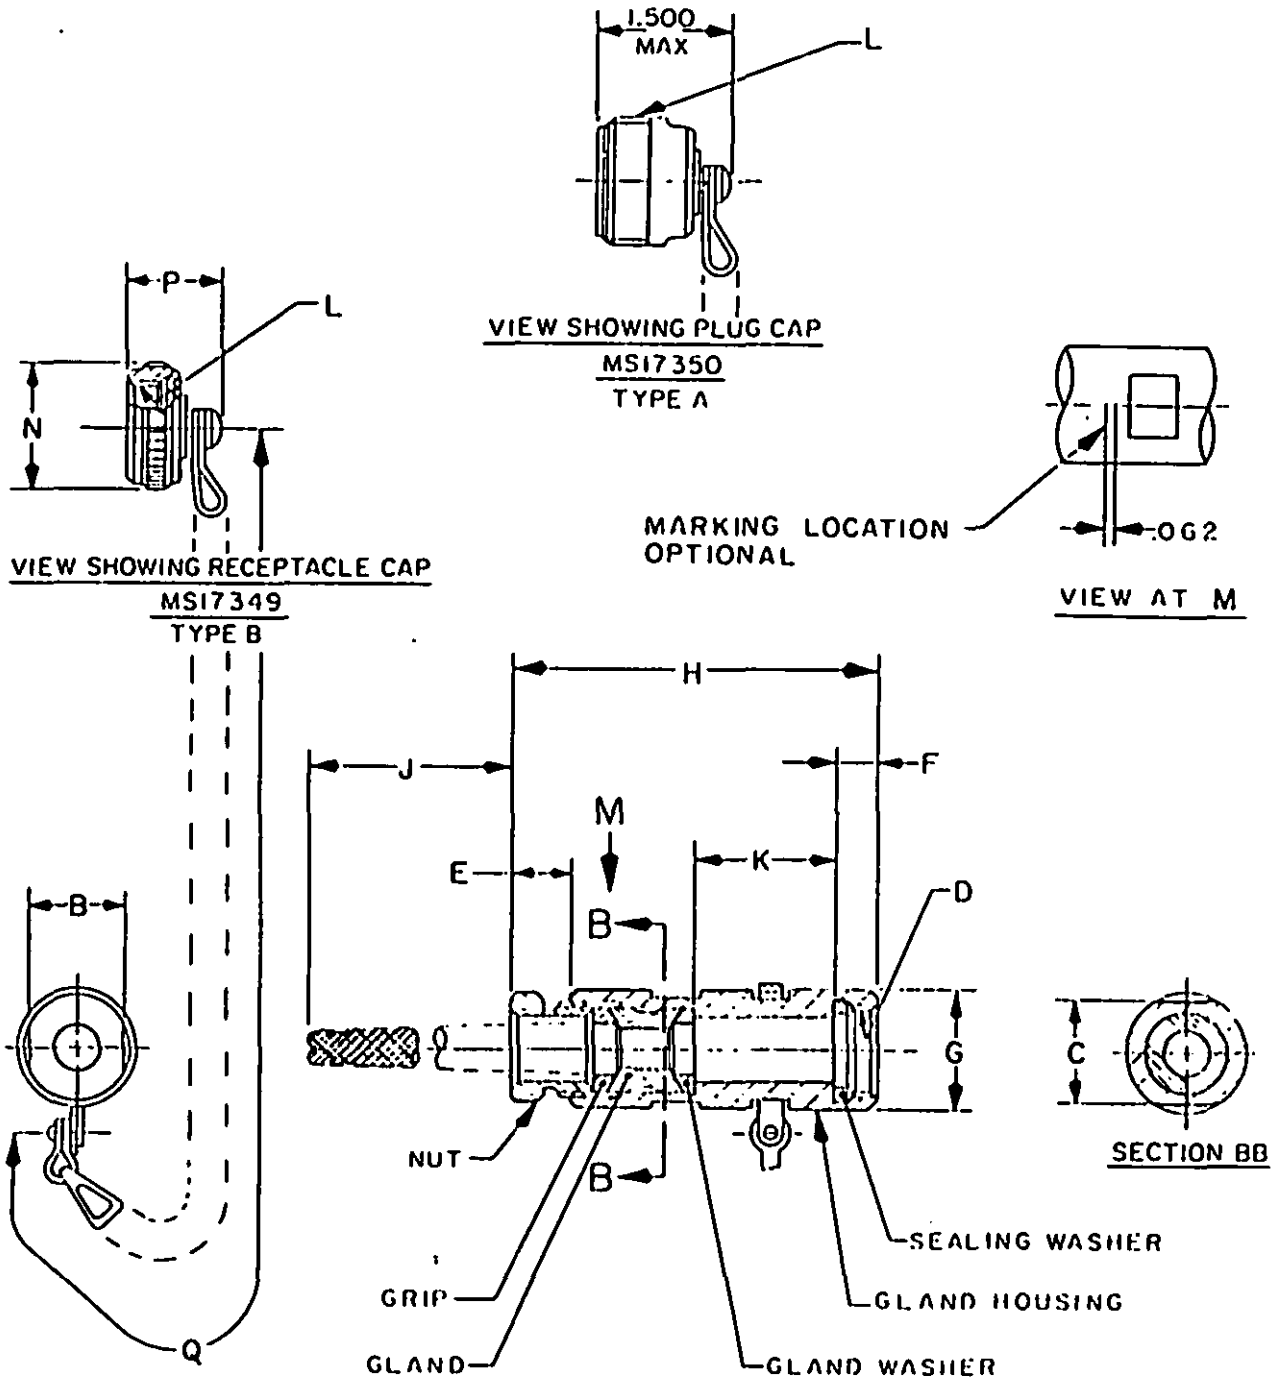

Configuration C. Style 3 cable sealing and gripping.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range Max dia	Cable range Min dia	B +.000 -.010	C +.000 -.010	D Thread Class 2B-LH	E Free length max	F +.016	G Dia +.010 -.020	H Max	J Approx-free length	K +.015 -.025	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
1	12	.377	.281	.750	.812	.7500-20 UNEF	.539	.479	.938	2.935	3.344	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	.281	.219	.750	.812	.7500-20 UNEF	.539	.479	.938	2.935	1.062	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
3	14	.438	.400	.975	.938	.8750-20 UNEF	.539	.479	1.062	3.248	4.344	.871	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
4	16	.605	.511	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	5.188	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
5	16	.530	.436	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	4.688	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
6	16	.405	.316	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	3.688	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
7	18	.699	.605	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	6.188	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
8	18	.625	.560	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	6.188	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
9	18	.455	.361	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	4.188	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
10	20	.828	.715	1.125	1.250	1.2500-18 UNEF	.625	.479	1.438	4.115	6.688	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
11	20	.562	.449	1.125	1.250	1.2500-18 UNEF	.625	.479	1.438	4.115	5.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
12	22	.900	.787	1.250	1.375	1.3750-18 UNEF	.597	.479	1.562	4.150	7.188	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
13	22	.750	.637	1.250	1.375	1.3750-18 UNEF	.597	.479	1.562	4.150	6.688	1.371	1.5000-0.1P-0.2L-DS	1.938	.980	6.00
14	24	1.109	.984	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	7.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00

Configuration C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil 8 Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range Max dia	Cable range Min dia	B +.000 -.010	C +.000 -.010	D Thread Class 2B-LH	E Free length max	F +.016	G Dia +.010 -.020	H Max	J Approx-free length	K +.015 -.025	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
15	24	1.000	.875	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	7.188	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
16	24	.880	.755	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	6.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
17	28	1.310	1.185	1.750	1.875	1.8750-16 UN	.597	.479	2.062	4.275	8.688	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
18	28	1.230	1.105	1.750	1.875	1.8750-16 UN	.597	.479	2.062	4.275	8.188	1.372	2.0000-0.1P-0.2L-DS	1.219	.980	6.00
19	28	1.180	1.055	1.750	1.875	1.8750-16 UNS	.597	.479	2.062	4.275	8.188	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
20	32	1.531	1.406	2.000	2.062	2.0625-16 UNS	.597	.479	2.312	4.337	10.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
21	32	1.455	1.320	2.000	2.062	2.0625-16 UN	.597	.479	2.312	4.337	9.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
22	42	1.375	1.250	2.000	2.062	2.0625-16 UN	.597	.479	2.312	4.337	9.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
23	36	1.656	1.531	2.250	2.312	2.3125-16 UN	.597	.479	2.562	4.399	12.688	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
24	36	1.562	1.437	2.250	2.312	2.3125-16 UN	.597	.479	2.562	4.399	11.188	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
(A) 25	44	2.250	2.105	2.750	2.750	2.8750-16 UN	.710	.667	3.125	5.799	17.188	2.218	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
(A) 26	44	2.170	2.025	2.750	2.750	2.8750-16 UN	.710	.667	3.125	5.799	17.188	2.218	3.0000-0.1P-0.2L-DS	3.217	.980	6.00

Configuration C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T10:10Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.755	19.18	1.312	33.32	2.110	53.59	4.337	110.16
.010	0.25	.765	19.43	1.3125	33.34	2.125	53.98	4.344	110.34
.015	0.38	.787	19.99	1.320	33.53	2.150	54.61	4.399	111.73
.016	0.41	.805	20.45	1.325	33.655	2.170	55.12	4.400	111.76
.020	0.51	.812	20.65	1.344	34.14	2.190	55.63	4.489	114.02
.025	0.64	.815	20.70	1.370	34.80	2.217	56.31	4.615	117.22
.031	0.79	.828	21.03	1.371	34.82	2.218	56.34	4.647	118.03
.062	1.57	.845	21.46	1.372	34.85	2.219	56.36	4.688	119.08
.188	4.78	.871	22.12	1.3750	34.925	2.250	57.15	4.896	124.35
.219	5.56	.8750	22.225	1.3750	34.93	2.2500	57.150	4.900	124.46
.246	6.25	.875	22.33	1.382	35.10	2.312	58.72	4.959	125.95
.281	7.14	.880	22.35	1.406	35.71	2.3125	58.738	5.00	127.0
.311	7.90	.890	22.61	1.420	36.07	2.460	62.48	5.000	127.00
.321	8.15	.900	22.86	1.425	36.20	2.469	62.71	5.021	127.53
.337	8.56	.930	23.62	1.430	36.32	2.475	62.87	5.083	129.10
.344	8.74	.935	23.75	1.437	36.50	2.500	63.50	5.100	129.54
.361	9.17	.9375	23.81	1.4375	36.513	2.5000	63.500	5.188	131.77
.375	9.53	.938	23.83	1.438	36.53	2.562	65.07	5.300	134.62
.396	10.06	.950	24.13	1.445	36.70	2.6250	66.675	5.600	142.24
.400	10.16	.969	24.61	1.450	36.83	2.625	66.68	5.725	145.41
.405	10.29	.970	24.64	1.455	36.96	2.715	68.96	5.799	147.29
.406	10.31	.974	24.74	1.531	38.89	2.719	69.06	6.00	152.4
.436	11.07	.980	24.89	1.546	39.27	2.750	69.85	6.188	157.17
.438	11.13	.984	24.99	1.562	39.67	2.7500	69.850	6.471	164.36
.446	11.33	1.000	25.40	1.5625	39.688	2.844	72.24	6.688	169.87
.449	11.40	1.0000	25.400	1.600	40.64	2.8750	73.025	7.188	182.57
.455	11.56	1.015	25.78	1.605	40.77	2.875	73.03	7.688	195.27
.479	12.17	1.030	26.16	1.625	41.28	2.900	73.66	8.188	207.97
.500	12.70	1.055	26.80	1.650	41.275	2.935	74.55	8.688	220.67
.511	12.98	1.062	26.97	1.656	42.06	2.953	75.01	9.688	246.07
.521	13.23	1.0625	26.988	1.660	42.16	2.969	75.41	10.688	271.47
.530	13.46	1.075	27.31	1.670	42.42	3.0000	76.20	11.188	284.17
.531	13.49	1.094	27.79	1.688	42.88	3.062	77.77	12.688	322.27
.539	13.69	1.095	27.81	1.700	43.18	3.125	79.38	17.188	436.57
.560	14.22	1.105	28.07	1.713	43.51	3.217	81.71		
.562	14.27	1.109	28.17	1.750	44.45	3.248	82.50		
.565	14.40	1.110	28.19	1.7500	44.450	3.250	82.55		
.597	15.16	1.121	28.47	1.780	45.21	3.344	84.94		
.600	15.24	1.1250	28.575	1.812	46.02	3.365	85.47		
.621	15.77	1.125	28.58	1.8125	46.038	3.500	88.90		
.625	15.88	1.180	29.97	1.860	47.24	3.628	93.42		
.637	16.18	1.185	30.10	1.8750	47.625	3.688	93.68		
.646	16.41	1.1857	30.163	1.875	47.63	3.712	94.28		
.652	16.56	1.188	30.18	1.900	48.26	4.000	101.60		
.667	16.94	1.200	30.48	1.938	49.23	4.024	102.21		
.690	17.53	1.219	30.96	1.950	49.53	4.100	104.14		
.699	17.75	1.220	30.99	2.000	50.80	4.115	104.52		
.710	18.03	1.230	31.24	2.0000	50.800	4.150	105.41		
.715	18.16	1.250	31.75	2.025	51.44	4.197	106.10		
.726	18.44	1.2500	31.750	2.062	52.37	4.188	106.38		
.750	19.05	1.281	32.54	2.0625	52.39	4.212	106.98		
.7500	19.050	1.310	33.27	2.105	53.47	4.275	108.59		

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 (0.41 mm).
4. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Accessories shall be designated type A and B:

Type A is for use with MS17344.

Type B is for use with MS17343, MS17345, and MS17347.

The backshell, cap and chain is considered the complete accessory to be supplied.


Material and finish: See table I. Connectors and their associated accessories shall be of the same finish.

TABLE I. Material and finish.

Component	Material	Finish
Accessory body and cap	High grade aluminum alloy in accordance with MIL-C-85049	A, W
Chain	Corrosion resistant steel, type II, class 3, trade number 8 of RR-C-271	Passivated
Gasket and gland	Rubber, in accordance with MIL-R-3065	


Part number: See example below:

For styles 1 and 2:

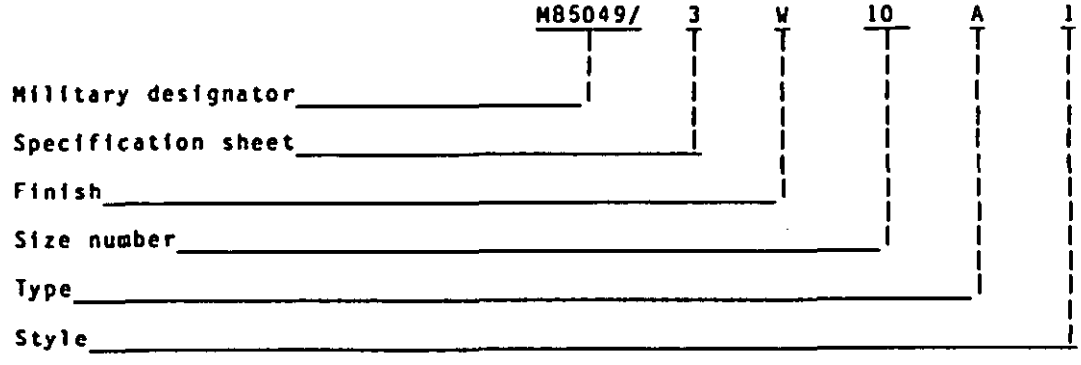

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

For style 3:

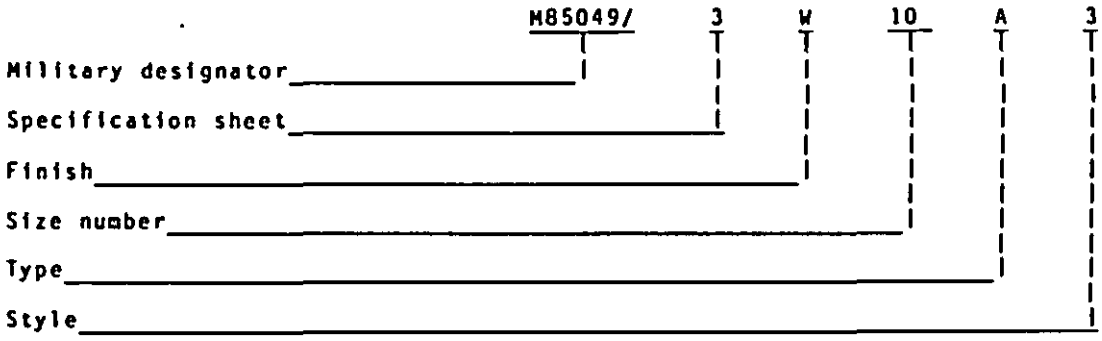

Simplified assembly instructions shall be packaged with each accessory.

Application:

These accessories are for use with connectors specified on MS17343, MS17344, MS17345, and MS17347.

Styles 1 and 3 are for use with classes R and C.


Style 2 for use with classes R, C, and J.


Qualification:

See MIL-C-85049, category 1A.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Supersession data:

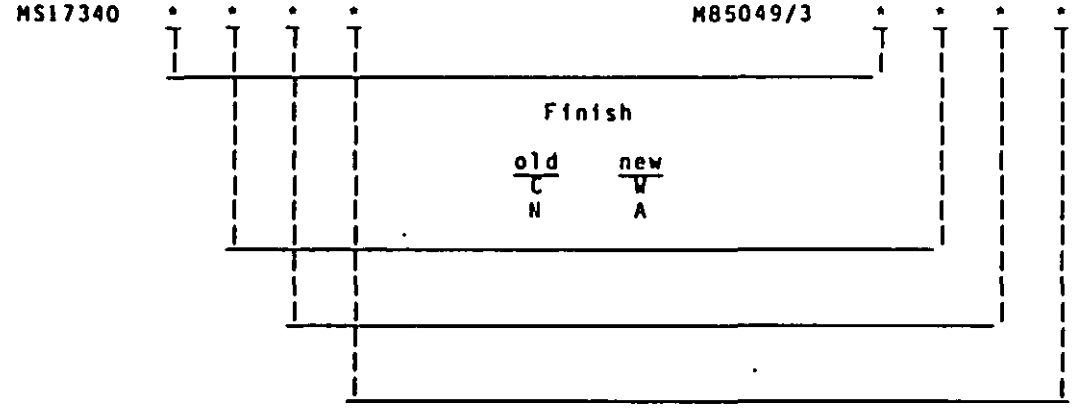

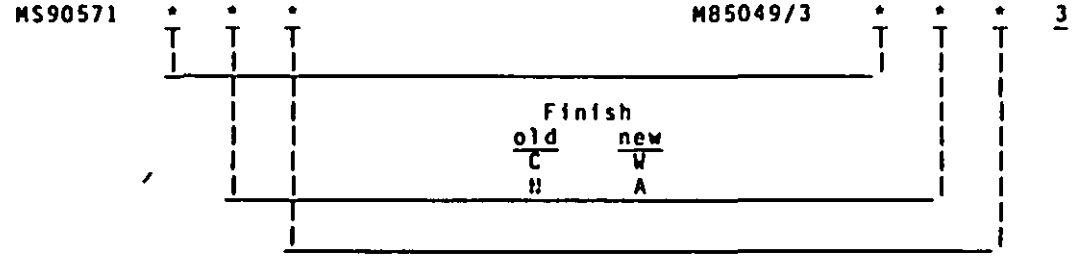

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
(A) Air Force - 11, 99
DLA - ES

(A) Civil agency coordinating activity:
NASA - NA

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3650-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.