
MIL-C-14409/10A
9 June 1969
SUPERSEDING
MIL-C-14409/10
29 May 1963


MILITARY SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC44


The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-14409.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

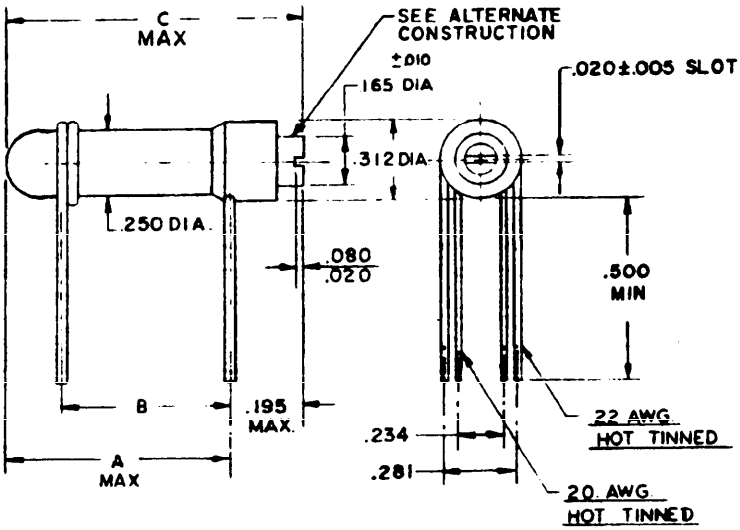



SUGGESTED MOUNTING HOLES



ALTERNATE CONSTRUCTION

INCHES	MM
.005	.13
.010	.25
.016	.41
.020	.51
.080	2.03
.165	4.19
.195	4.95
.234	5.94
.250	6.35
.281	7.14
.312	7.92
.500	12.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016.
4. This style capacitor is designed for printed-circuit mounting.
5. For dimensions A and B see Table I.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure and table I.

DC voltage rating: 750 volts.

Construction: Sealed glass, see figure and table I.

Insulation resistance (IR): Method 302 of MIL-STD-202, test condition B (500 volts ± 10 percent); not less than 1, 000, 000 megohms at room ambient temperature and not less than 100, 000 megohms at 125° C.

Capacitance range: See table I.

Quality factor (Q): See table I.

Temperature cycling: Method 102 of MIL-STD-202, test condition D, except the step 3 temperature shall be 125° C ± 5° C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Seal test: Applicable.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Dimensions 1/			Q	Dielectric material
	Min	Max	A (max)	B ± .031(.79)	C (max)		
	pf	pf					
PC44H050	1.0	5.0	.469(11.91)	.250(6.35)	.594(15.09)	1000	Glass
PC44H100	1.0	10.0	.625(15.88)	.438(11.13)	.750(19.05)	900	Glass
PC44H140	1.0	14.0	.812(20.62)	.625(15.88)	.938(23.83)	800	Glass
PC44H190	1.0	19.0	1.031(26.19)	.875(22.24)	1.250(31.75)	700	Glass
PC44H350	1.0	35.0	1.600(40.64)	1.469(37.31)	1.795(55.59)	500	Glass

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm. Millimeters are in parentheses.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - AS, OS
Air Force -
DSA - ES

User activities:
Army -
Navy - CG, MC
Air Force -

Preparing activity:
Army - EL

(Project 5910-0842-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-C-14409/10A Capacitors, Variable(Piston Type, Tubular Trimmer), Style PC4

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-PM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- TL-SS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.