INCH-POUND


MIL-C-14409/12E
25 May 1989
SUPERSEDING
MIL-C-14409/12D
30 September 1982

MILITARY SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC25 AND PC31

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-14409.

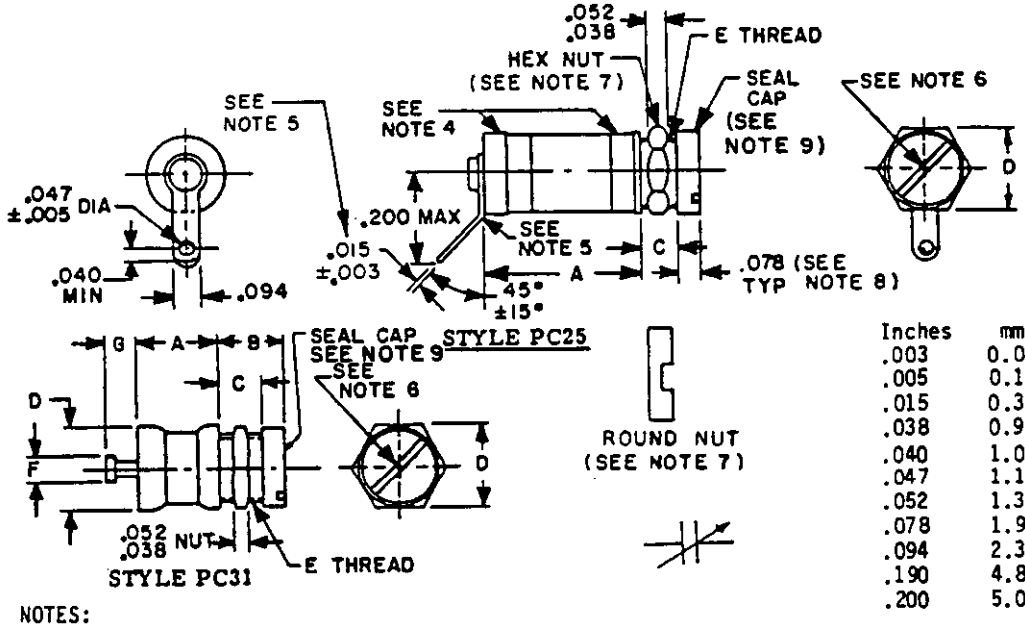

Inches	mm
.003	0.08
.005	0.13
.015	0.38
.038	0.97
.040	1.02
.047	1.19
.052	1.32
.078	1.98
.094	2.39
.190	4.83
.200	5.08

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 (0.41 mm).
4. Solder, if used, shall be high temperature solder having a melting point of 300°C +5°C, - 5°C.
5. Bend-point of terminal at turret shall be within the radius of the turret cap. For style PC25J060, terminal may be perpendicular to body, .225 inches (5.72 mm) maximum length.
6. Screw slot shall be .020 ±.005 (0.51 ±0.13 mm) wide x .020 (0.51 mm) to .080 (2.03 mm) deep x .094 (1.57 mm) minimum long.
7. Round nut shall be furnished on parts with .190-64 thread.
8. Seal cap shall be .062 (1.57 mm) typical for parts with .190-64 thread.
(E) 9. Seal cap shall be slotted.

FIGURE 1. Dimensions and configurations.

(E) denotes changes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q min	Dimensions						
	Min	Max		A ±.020 (0.51)	B ±.020 (0.51)	C ±.016 (0.41)	D	E	F	G
	pF	pF								
PC25J060	0.6	6.0	10,000	.281 (7.14)	.203 (5.16)	.141 (3.58)	.220 (5.59)	.190-64 UNS-2A	---	---
PC25J100	0.8	10.0	5,000	.288 (7.32)	.196 (4.98)	.118 (3.00)	.281 (7.14)	.234-64 UNS-2A	---	---
PC25J140	1.0	14.0	3,000	.288 (7.32)	.196 (4.98)	.125 (3.18)	.281 (7.14)	.234-64 UNS-2A	---	---
PC25J200	1.0	20.0	1,500	.500 (12.70)	.242 (6.15)	.164 (4.17)	.281 (7.14)	.234-64 UNS-2A	---	---
PC31J060	0.6	6.0	10,000	.281 (7.14)	.203 (5.16)	.141 (3.58)	.220 (5.59)	.190-64 UNS-2A	.063 (1.60)	.078 (1.98)
PC31J100	0.8	10.0	5,000	.288 (7.32)	.196 (4.98)	.118 (3.00)	.281 (7.14)	.234-64 UNS-2A	.094 (2.39)	.109 (2.77)
PC31J140	1.0	14.0	3,000	.288 (7.32)	.196 (4.98)	.125 (3.18)	.281 (7.14)	.234-64 UNS-2A	.094 (2.39)	.109 (2.77)
PC31J200	1.0	20.0	1,500	.500 (12.70)	.242 (6.15)	.164 (4.17)	.281 (7.14)	.234-64 UNS-2A	.094 (2.39)	.109 (2.77)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Alumina ceramic.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Temperature condition: 250 volts ±10 percent.

Quality factor (Q): See table I (measured at frequency of 100 MHz ±10 MHz).

Driving torque: Greater than or equal to 0.5 and less than or equal to 6.0 ounce-inches from -55°C through +125°C, except that styles with .220 diameter shall be 0.4 to 4.0 ounce-inches.

Thermal shock: Method 107 of MIL-STD-202, test condition A (characteristic J), except the step 3 temperature shall be 125°C ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Seal: Applicable, with seal cap on.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1635)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.