NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-14409/12F
2 June 1992
SUPERSEDING
MIL-C-14409/12E
29 May 1989

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC25 AND PC31

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-14409.

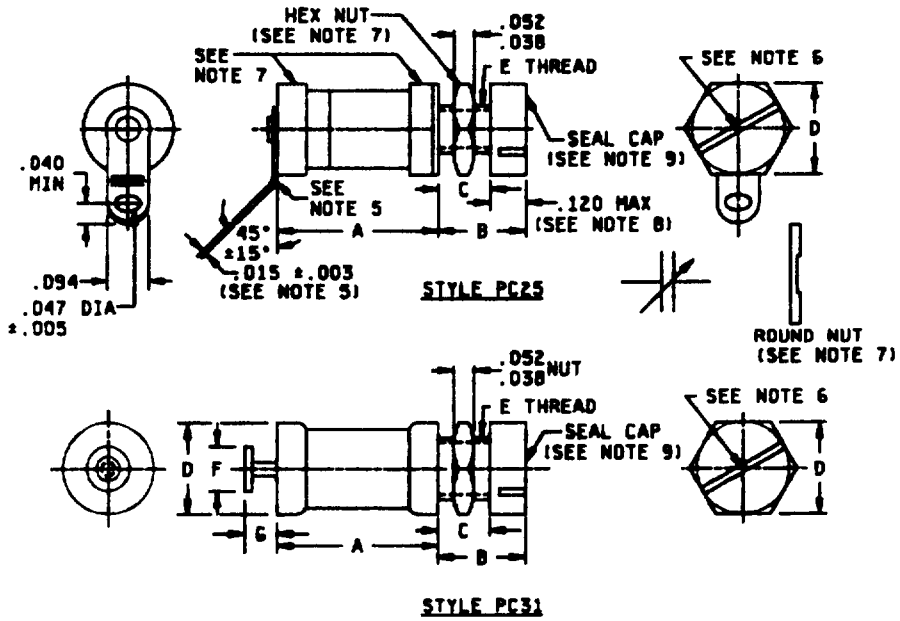

INCHES	MM
.003	0.08
.005	.13
.015	.38
.038	0.97
.040	1.02
.047	1.19
.052	1.32
.094	2.39
.120	3.05
.190	4.83
.200	5.08

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 inch (0.41 mm).
4. Solder, if used, shall be high temperature solder having a melting point of 300°C ±5°C.
5. Bend-point of terminals at turret shall be within the radius of the turret cap. For style PC25J060, terminal may be perpendicular to the body, .225 inch (5.72 mm) maximum length.
6. Screw slot shall be .020 ± .005 inch (0.51 ±0.13 mm) wide x .020 inch (0.51 mm) to .080 inch (2.03 mm) deep x .094 inch (2.39 mm) minimum long.
7. Round nut shall be furnished on parts with .190-64 thread.
8. Seal cap shall be .100 inch (2.54 mm) maximum for parts with .190-64 thread.
9. Seal cap shall be slotted.

FIGURE 1. Dimensions and configurations.

(F) denotes changes

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

(F) TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q Min	Dimensions						
	Min	Max		A ±.020 (0.51)	B Max	C ±.016 (0.41)	D	E	F	G
	pF	pF								
PC25J060	0.6	6.0	10,000	.281 (7.14)	.260 (6.60)	.141 (3.58)	.220 (5.59)	.190-64 UNS-2A	---	---
PC25J100	0.8	10.0	5,000	.288 (7.32)	.260 (6.60)	.130 (3.30)	.281 (7.14)	.234-64 UNS-2A	---	---
PC25J140	1.0	14.0	3,000	.288 (7.32)	.260 (6.60)	.130 (3.30)	.281 (7.14)	.234-64 UNS-2A	---	---
PC25J200	1.0	20.0	1,500	.500 (12.70)	.300 (7.62)	.170 (4.32)	.281 (7.14)	.234-64 UNS-2A	---	---
PC31J060	0.6	6.0	10,000	.281 (7.14)	.260 (6.60)	.141 (3.58)	.220 (5.59)	.190-64 UNS-2A	.063 (1.60)	.078 (1.98)
PC31J100	0.8	10.0	5,000	.288 (7.32)	.260 (6.60)	.130 (3.30)	.281 (7.14)	.234-64 UNS-2A	.094 (2.39)	.109 (2.77)
PC31J140	1.0	14.0	3,000	.288 (7.32)	.260 (6.60)	.130 (3.30)	.281 (7.14)	.234-64 UNS-2A	.094 (2.39)	.109 (2.77)
PC31J200	1.0	20.0	1,500	.500 (12.70)	.300 (7.62)	.170 (4.32)	.281 (7.14)	.234-64 UNS-2A	.094 (2.39)	.109 (2.77)

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Alumina ceramic.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Temperature condition: 250 volts ±10 percent.

Quality factor (Q): See table I (measured at frequency of 100 MHz ±10 MHz).

Driving torque: Greater than or equal to 0.5 and less than or equal to 6.0 ounce-inches from -55°C through +125°C, except that styles with .220 diameter shall be 0.4 to 4.0 ounce-inches.

Thermal shock: Method 107 of MIL-STD-202, test condition A (characteristic J), except the step 3 temperature shall be 125°C ±5°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

Immersion: Method 104 of MIL-STD-202, test condition A.

Seal: Applicable, with seal cap on.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1805)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.