NOTE The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-14409/13K
30 September 1982
SUPERSEDING
MIL-C-14409/13J
16 June 1981

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-PRF-14409.

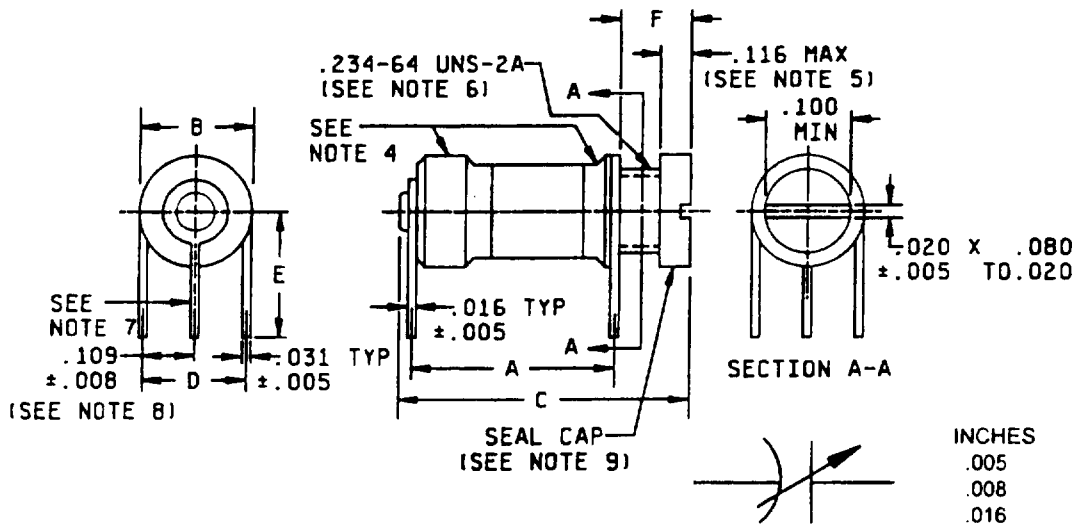

INCHES	MM
.005	.13
.008	.20
.016	.41
.020	.51
.031	.79
.080	2.03
.100	2.54
.109	2.77
.116	2.95
.234	5.94

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 inch (0.41 mm).
4. If solder is used the soldering of the turret cap to the cylinder, and of the cylinder to the base and to the base leads shall be accomplished with a high temperature solder having a melting point of 300°C +50°C, -5°C.
5. For type PC26J060, dimension shall be .094 ±.005 (2.39 mm ±.13 mm).
6. For type PC26J060, thread shall be .190-64 UNS-2A.
7. For type PC26J300, two terminals shall be used of same size and length as front terminals.
8. For type PC26J060, dimension shall be .078 ± 008 (1.95 ±20 mm).
9. Seal cap shall be slotted.

FIGURE 1. Dimensions and configuration.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q	Dimensions					
	Min	Max	Min	A ±.025 (.64)	B	C max	D	E	F
	pF	pF							
PC26J060	0.6	6.0	10,000	.266 (6.76)	.220 (5.59)	.541 (13.74)	.156 (3.96)	.250 (6.35)	.240 (6.10)
PC26T100	0.8	10.0	5,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.312 (7.92)	.211 (5.36)
PC26J100	0.8	10.0	5,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.312 (7.92)	.211 (5.36)
PC26T140	1.0	14.0	3,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.500 (12.70)	.218 (5.54)
PC26J140	1.0	14.0	3,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.500 (12.70)	.218 (5.54)
PC26T200	1.0	20.0	1,500	.562 (14.27)	.281 (7.14)	.801 (20.35)	.219 (5.56)	.500 (12.70)	.196 (4.98)
PC26J200	1.0	20.0	1,500	.562 (14.27)	.281 (7.14)	.801 (20.35)	.219 (5.56)	.500 (12.70)	.196 (4.98)
PC26J300	1.0	30.0	800	.750 (19.05)	.281 (7.14)	.969 (24.61)	.219 (5.56)	.500 (12.70)	.196 (4.98)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Alumina ceramic.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.
Test condition - 250 volts ±10 percent.

Quality factor (Q): See table I.
Test frequency - 100 MHz ±10 MHz.

Driving torque: Greater than or equal to 0.5 and less than or equal to 6.0 ounce-inches from -55°C through +125°C (characteristic J) or -65°C through +125°C (characteristic T). Type PC26J060 shall be 0.4 and 4.0 ounce-inches.

Thermal shock: Method 107 of MIL-STD-202, test condition B (characteristic T) or A (characteristic J), except the step 3 temperature shall be 125°C ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: Applicable.

Seal: Applicable, with seal cap on.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Preparing activity:
Army - ER

Review activities:
Navy - AS, OS
DLA - ES

(Project 5910-1423-2)

User activities:
Navy - CG, MC

Agent:
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.