INCH POUND

MIL-PRF-14409/13L
25 July 2001
SUPERSEDING
MIL-PRF-14409/13K
30 September 1982

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE,
TUBULAR TRIMMER), STYLES PC26

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this document and the latest issue of specification MIL-PRF-14409.

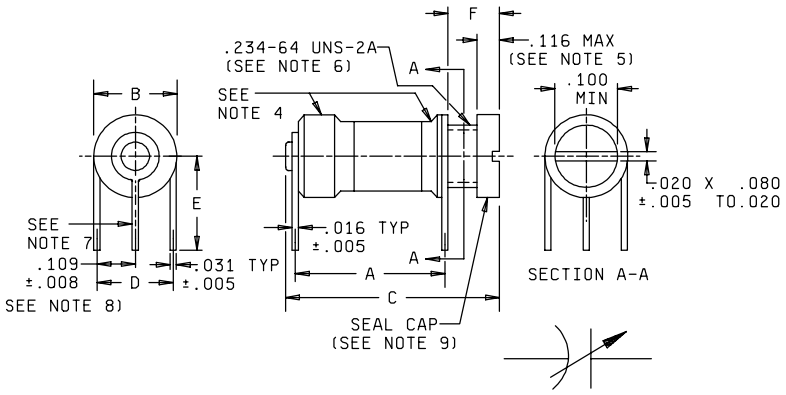

Inches	mm
.005	0.13
.008	0.20
.016	0.41
.020	0.51
.031	0.79
.080	2.03
.100	2.54
.109	2.77
.116	2.95
.234	5.94

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .016 inch (0.41 mm).
4. If solder is used the soldering of the turret cap to the cylinder, and of the cylinder to the base and to the base leads shall be accomplished with a high temperature solder having a melting point of 300°C +50°C, -5°C
5. For type PC26J060, dimension shall be .094 ±.005 (2.39 mm ±.13 mm).
6. For type PC26J060, thread shall be .190-64 UNS-2A.
7. For type PC26J300, two terminals shall be used of same size and length as front terminals.
8. For type PC26J060, dimension shall be .078 ±.008 (1.95 ±20 mm).
9. Seal cap shall be slotted.

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q Min	Dimensions					
	Min	Max		A ± .025 (0.64)	B Max	C Max	D	E	F
	pF	pF							
PC26J060	0.6	6.0	10,000	.266 (6.76)	.220 (5.59)	.541 (13.74)	.156 (3.96)	.250 (6.35)	.240 (6.10)
PC26T100	0.8	10.0	5,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.312 (7.92)	.211 (5.36)
PC26J100	0.8	10.0	5,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.312 (7.92)	.211 (5.36)
PC26T140	1.0	14.0	3,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.500 (12.70)	.218 (5.54)
PC26J140	1.0	14.0	3,000	.297 (7.54)	.281 (7.14)	.578 (14.68)	.219 (5.56)	.500 (12.70)	.218 (5.54)
PC26T200	1.0	20.0	1,500	.562 (14.27)	.281 (7.14)	.801 (20.35)	.219 (5.56)	.500 (12.70)	.196 (4.98)
PC26J200	1.0	20.0	1,500	.562 (14.27)	.281 (7.14)	.801 (20.35)	.219 (5.56)	.500 (12.70)	.196 (4.98)
PC26J300	1.0	30.0	800	.750 (19.05)	.281 (7.14)	.969 (24.61)	.219 (5.56)	.500 (12.70)	.196 (4.98)

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Alumina ceramic.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall not be less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Test condition - 250 volts ±10 percent.

Quality factor (Q): See table I.

Test frequency - 100 MHz ±10 MHz.

Driving torque: Greater than or equal to 0.5 and less than or equal to 6.0 ounce-inches from -55°C through +125°C (characteristic J) or -65°C through +125°C (characteristic T). Type PC26J060 shall be 0.4 and 4.0 ounce-inches.

Thermal shock: Method 107 of MIL-STD-202, test condition B (characteristic T) or A (characteristic J), except the step 3 temperature shall be 125°C ±5°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: Applicable.

Seal: Applicable, with seal cap on.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11

Review activities:
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5910-2111-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:14Z
Check the source to verify that this is the current version before use.