NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-14409/14H
5 June 1992
SUPERSEDING
MIL-C-14409/14G (USAF)
21 May 1981

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC27, PC28, AND PC29

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-14409.

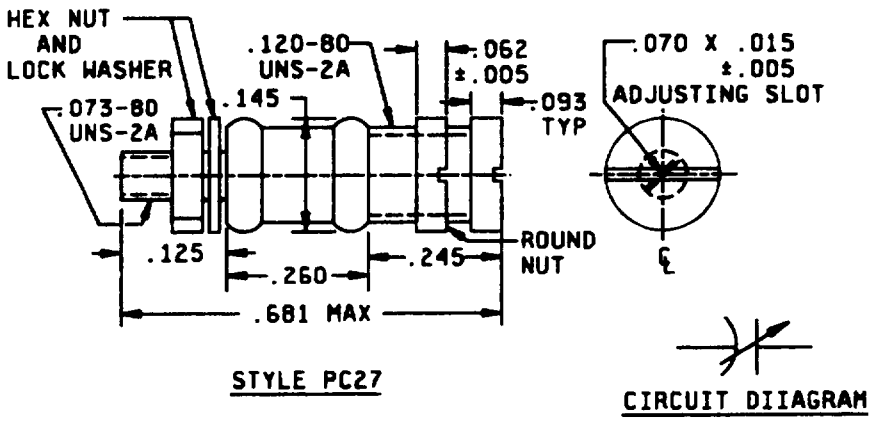


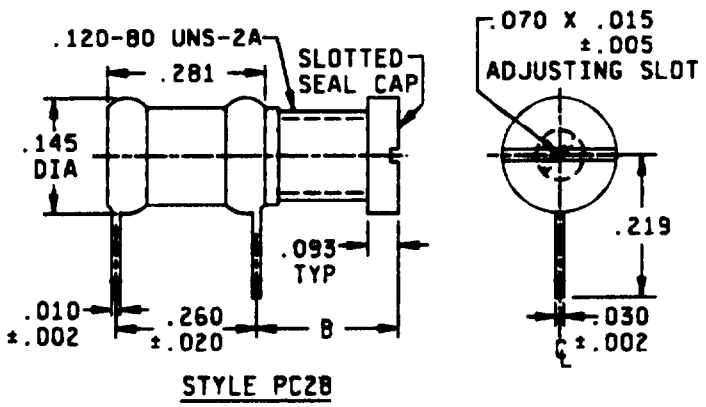


FIGURE 1. Dimensions and configuration.

(H) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

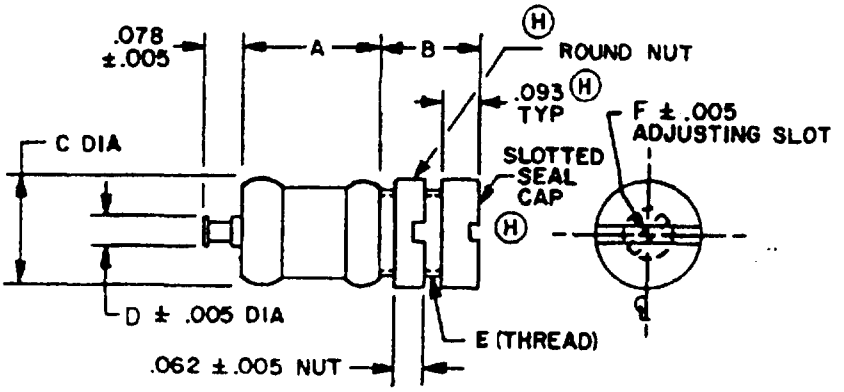

Style PC29

INCHES	MM	INCHES	MM
.002	.05	.078	1.98
.005	.13	.093	2.36
.010	.25	.120	3.05
.015	.38	.125	3.18
.020	.51	.145	3.68
.030	.76	.219	5.56
.062	1.57	.245	6.22
.070	1.78	.260	6.63
.073	1.85	.281	7.14
		.681	17.30

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q Min	Dimension 1/					
	Min	Max		A	Ⓗ B ±.020 (.51)	C	D	E	Ⓗ F
PC27J3R5	pF 0.35	pF 3.5	10,000						
PC28J3R5	0.35	3.5	10,000		.245 (6.22)	See Figure			
PC28J050	0.5	5.0	7,500		.281 (7.14)				
PC29J3R5	0.35	3.5	10,000	.266 (6.76)	.250 (6.35)	.145 (3.68)	.047 (1.19)	.120-80 UNS-2A	.070 x .015 (1.78) (.38)
PC29J050	0.5	5.0	7,500	.266 (6.76)	.281 (7.14)	.145 (3.68)	.047 (1.19)	.120-80 UNS-2A	.070 x .015 (1.78) (.38)
PC29J100	0.8	10.0	7,500	.281 (7.14)	.249 (6.32)	.220 (5.59)	.062 (1.57)	.190-64 UNS-2A	.093 Min x .020 (2.36) (.51)

1/ Metric equivalents are shown in parentheses for general information only and are based upon 1.00 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Alumina ceramic.

Dielectric: Air.

Capacitance range: See table I.

Ⓗ Insulation resistance: Not less than 10^6 megohms at room ambient temperature and not less than 10^5 megohms at 125°C.
Test condition - 250 volts ±10 percent.

Quality factor (Q): See table I (measured at frequency of 100 MHz).

Driving torque: Greater than or equal to 0.3 and less than or equal to 4.0 ounce-inches from -55°C through +125°C.

Ⓗ Thermal shock: Method 107 of MIL-STD-202, test condition A, except step 3 temperature shall be 125° ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: Applicable to style PC28 and PC29 only.

Seal: Applicable, with seal cap on.

CONCLUDING MATERIAL

Custodians:
Air Force - 85
Army - ER
Navy - EC

Review activities
DLA - ES

Preparing activity:
Air Force - 85

(Preject 5910-1810)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.