NOTE The document identifier and heading have been changed on this page to reflect that this is a performance specification There are no other changes to this document The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised


MIL-PRF-14409/15F
30 September 1982
SUPERSEDING
MIL-C-14409/15E
8 September 1980

PERFORMANCE SPECIFICATION SHEET


CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC30, PC32, and PC34

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-PRF-14409.

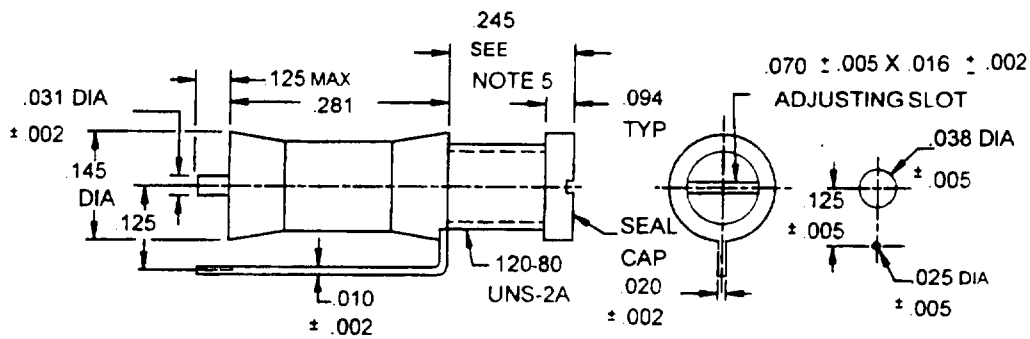

STYLE PC 30

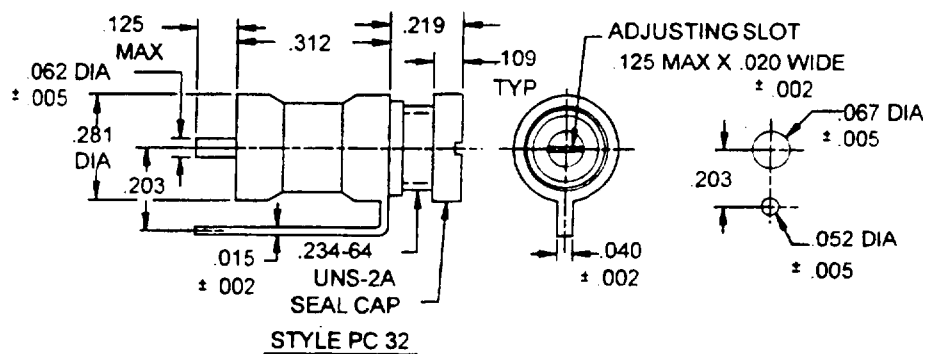


STYLE PC 32

FIGURE 1 Dimensions and configurations

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

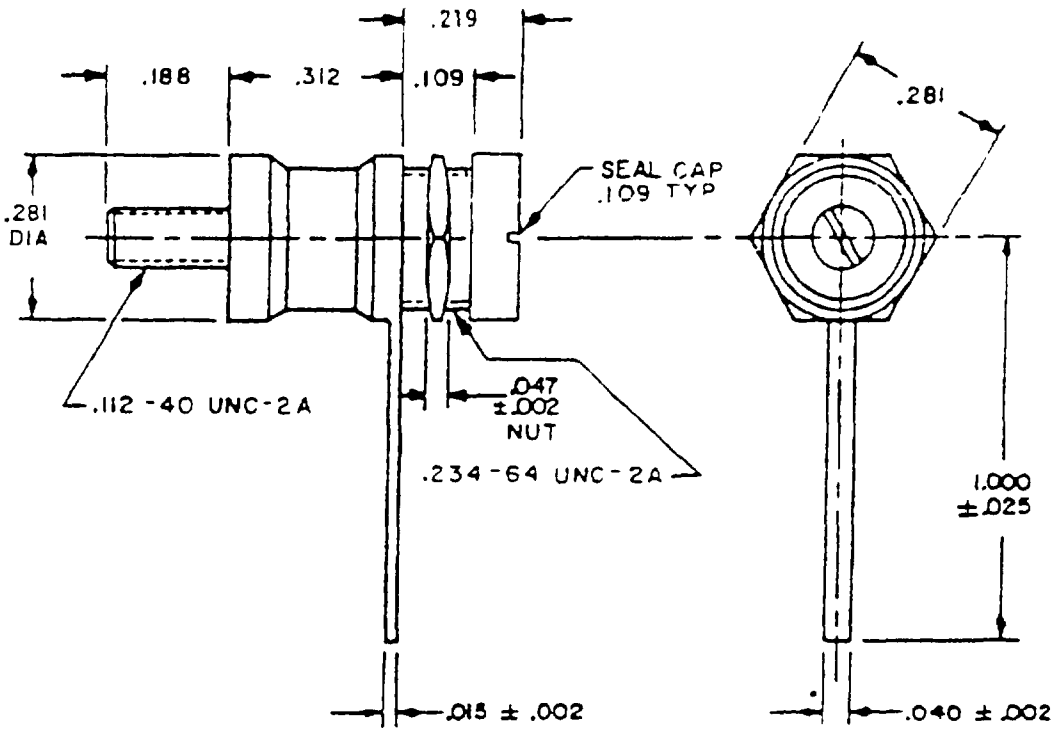

STYLE PC 34

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.038	.97	.093	2.36	.203	5.17
.005	.13	.040	1.02	.109	2.77	.214	5.44
.010	.25	.047	1.19	.112	2.84	.219	5.56
.015	.38	.052	1.32	.120	3.05	.234	5.94
.016	.41	.062	1.57	.125	3.18	.245	6.22
.020	.51	.067	1.70	.145	3.68	.281	7.14
.025	.64	.070	1.78	.156	3.96	.312	7.92
.031	.79	.078	1.98	.188	4.78	1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).
4. Seal cap shall be slotted.
5. For type PC30J5R0, this dimension shall be .280 (7.11).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

DC voltage rating: 250 volts.

Construction: Alumina ceramic.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.
Test condition - 250 volts ±10 percent.

Quality factor (Q): See table I (measured at frequency of 100 MHz ±10 MHz).

Driving torque:
Style PC30 - greater than or equal to 0.3 and less than or equal to 5 ounce-inches from -55°C to +125°C.
Style PC32 and PC34 - greater than or equal to 0.5 and less than or equal to 5 ounce-inches from -65°C to +125°C.

Thermal shock: Method 107 of MIL-STD-202, test condition B (characteristic T) or A (characteristic J), except the step 3 temperature shall be 125°C ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Seal: Applicable, with seal cap on.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q
	Min	Max	Min
	pF	pF	
PC30J3R5	0.6	3.5	10,000
PC30J5R0	0.6	5.0	7,500
PC32T140	1.5	14.0	3,000
PC34T100	.8	10.0	2,000

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5910-1423-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.