INCH-POUND
MIL-PRF-14409/15K
23 March 2026
SUPERSEDING
MIL-PRF-14409/15J
26 January 2021

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC30, PC32, PC34

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and MIL-PRF-14409.


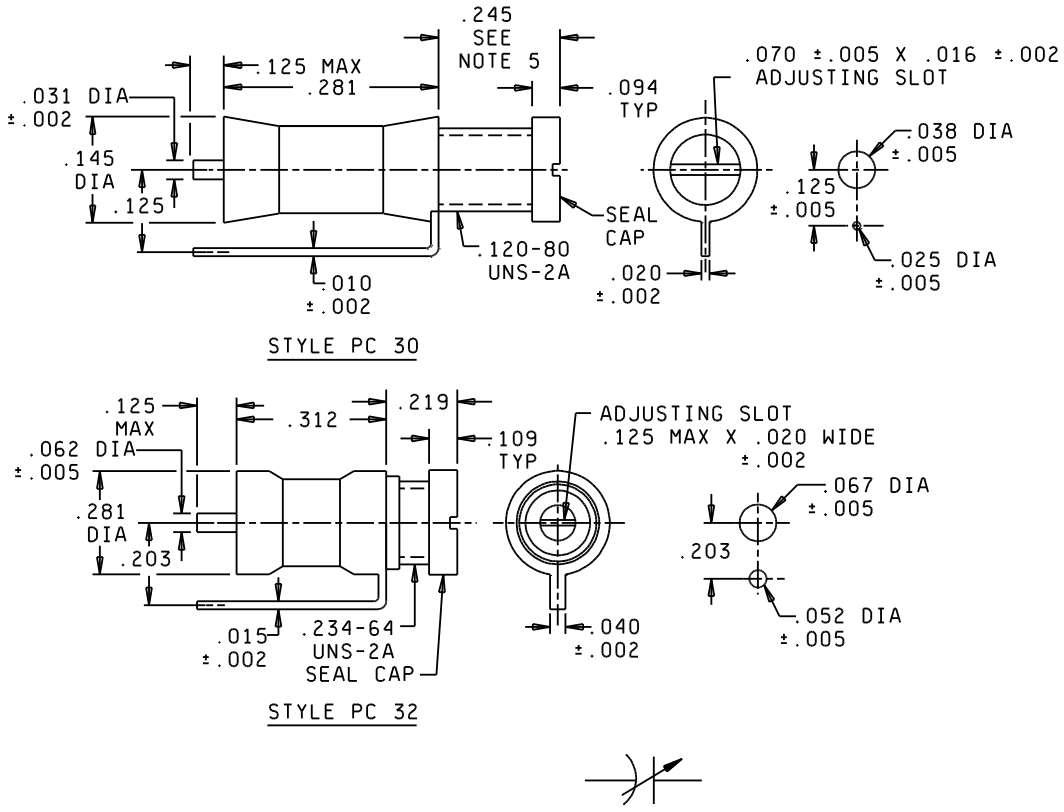


FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

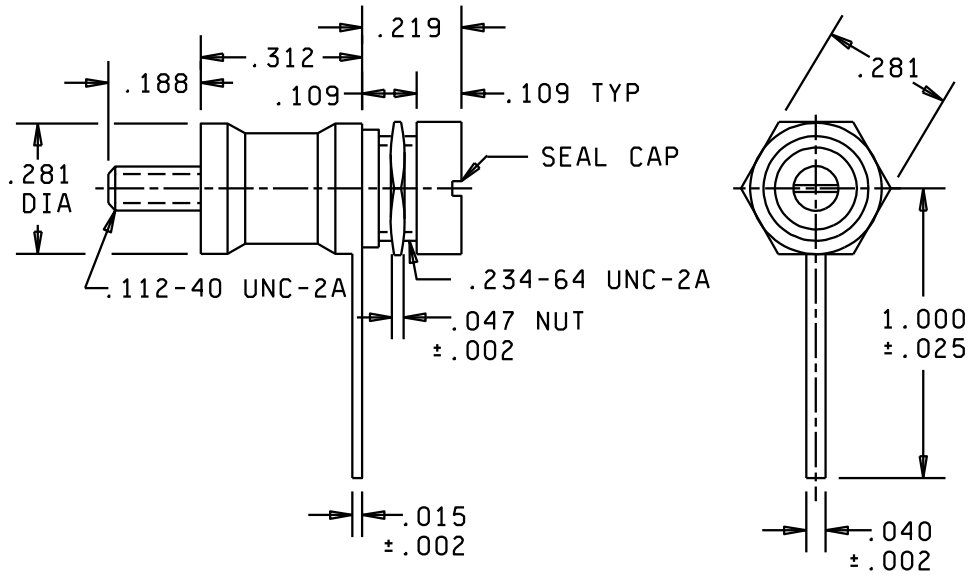

STYLE PC 34

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.038	0.97	.093	2.36	.203	5.17
.005	0.13	.040	1.02	.109	2.77	.214	5.44
.010	0.25	.047	1.19	.112	2.84	.219	5.56
.015	0.38	.052	1.32	.120	3.05	.234	5.94
.016	0.41	.062	1.57	.125	3.18	.245	6.22
.020	0.51	.067	1.70	.145	3.68	.281	7.14
.025	0.64	.070	1.78	.156	3.96	.312	7.92
.031	0.79	.078	1.98	.188	4.78	1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Unless otherwise specified, tolerance is ± .016 inch (0.41 mm).
4. Seal cap shall be slotted.
5. For PIN PC30J5R0, this dimension shall be .280 inch (7.11 mm).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

DC voltage rating: 250 volts.

Construction: Alumina ceramic.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at +125°C.

Test condition: 250 volts ±10 percent.

Quality factor (Q): See table I (measured at frequency of 100 MHz ±10 MHz).

Driving torque:

Style PC30: Greater than or equal to 0.3 ounce-inches and less than or equal to 5 ounce-inches from -55°C to +125°C

Style PC32 and PC34: Greater than or equal to 0.5 ounce-inches and less than or equal to 5 ounce-inches from -65°C to +125°C.

Thermal shock: MIL-STD-202-107, test condition B (characteristic T) or A (characteristic J), except the step 3 temperature shall be +125°C ±5°C.

Immersion: MIL-STD-202-104, test condition A.

Seal: Applicable, with seal cap on.

TABLE I. Capacitor characteristics.

Part or identifying number (PIN)	Capacitance range		Q minimum
	Min (pF)	Max (pF)	
PC30J3R5	0.6	3.5	10,000
PC30J5R0	0.6	5.0	7,500
PC32T140	1.5	14.0	3,000
PC34T100	0.8	10.0	2,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-14409, this document references the following:

MIL-STD-202-104
MIL-STD-202-107

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2026-013)

Review activities:
Navy - AS, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.