NOTE The document identifier and heading have been changed on this page to reflect that this is a performance specification There are no other changes to this document The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised

INCH-POUND


MIL-PRF-14409/16D
27 July 1990
SUPERSEDING
MIL-C-14409/16C (USAF)
1 April 1981

PERFORMANCE SPECIFICATION SHEET


CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC21, PC22, PC23, AND PC24.

This specification is approved for use by the Department of the Air-Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-14409.

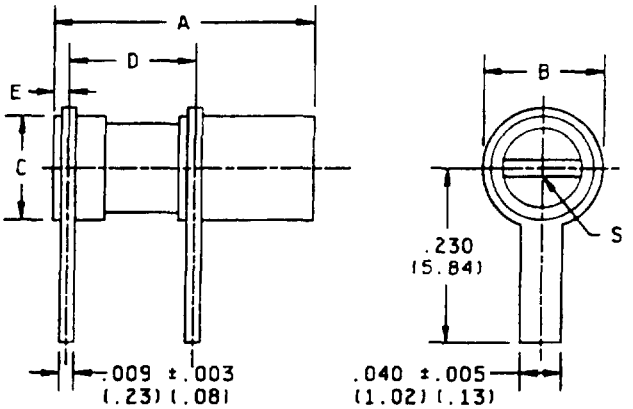

STYLE PC21

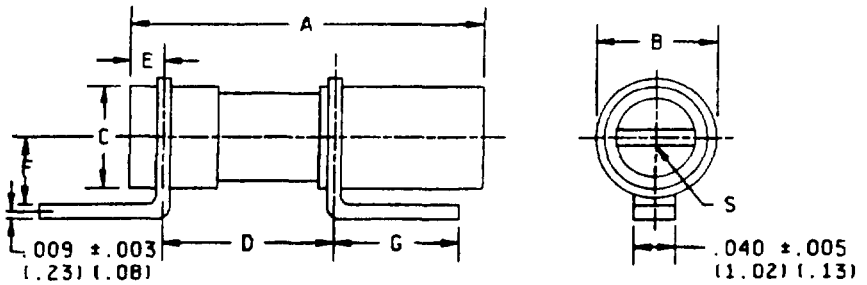


STYLE PC22

FIGURE 1. Dimensions and configurations.


Ⓓ denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

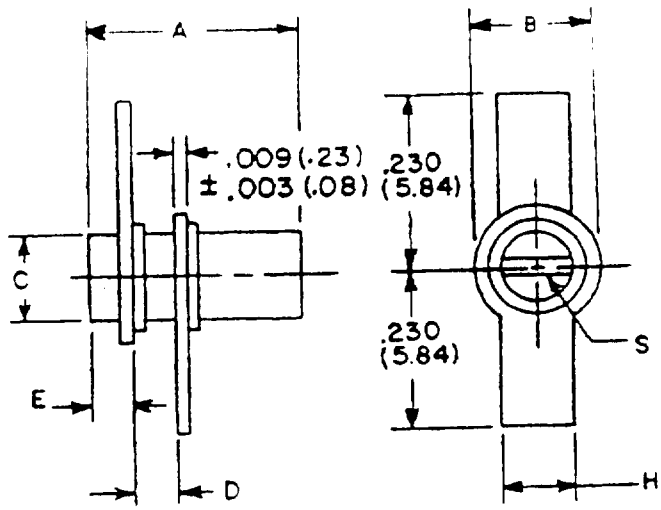

STYLE PC23

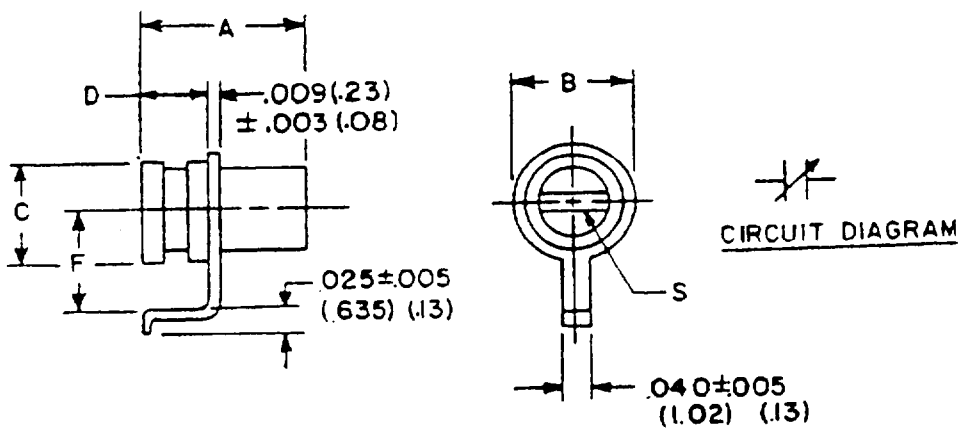

STYLE PC24

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.016 (0.41 mm).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

(D) TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q Min	Capacitance drift	Dimensions 1/										
	Min	Max			A (Max)	B (Max)	C ±.005 (0.13)	D ±.010 (0.25)	E ±.010 (0.25)	F ±.020 (0.51)	G ±.020 (0.51)	H ±.005 (0.13)	S		
													Depth (Min)	Width ±.005 (0.13)	Length (Min)
	pF	pF		pF											
PC21J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.082 (2.08)	.014 (0.36)	---	---	---	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC21J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.082 (2.08)	.014 (0.36)	---	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC21J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.130 (3.30)	.034 (0.86)	---	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC21K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01)	.118 (3.00)	.250 (6.35)	.036 (0.91)	---	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC22J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.082 (2.08)	.014 (0.36)	.047 (1.19)	.183 (4.65)	---	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC22J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.082 (2.08)	.014 (0.36)	.070 (1.78)	.160 (4.06)	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC22J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.130 (3.30)	.034 (0.86)	.070 (1.78)	.160 (4.06)	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC22K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01)	.118 (3.00)	.250 (6.35)	.036 (0.91)	.070 (1.78)	.160 (4.06)	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC23J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.056 (1.42)	.018 (0.46)	---	---	.040 (1.02)	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC23J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.056 (1.42)	.018 (0.46)	---	---	.093 (2.36)	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC23J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.060 (1.52)	.060 (1.52)	---	---	.093 (2.36)	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC23K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01)	.118 (3.00)	.05 (1.3)	.148 (3.76)	---	---	.093 (2.36)	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC24J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.09 (2.3)	---	.075 (1.90)	---	---	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC24J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.09 (2.3)	---	.110 (2.79)	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC24J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.16 (4.1)	---	.110 (2.79)	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC24K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01)	.118 (3.00)	.25 (6.4)	---	.110 (2.79)	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)

1/ Metric equivalents are given for general information only.

MIL-C-14409G(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 500 volts.

Dielectric: Alumina or sapphire.

Capacitance range: See table I.

Insulation resistance: Not less than 10^6 megohms at room ambient temperature and not less than 10^5 megohms at +125°C.

Test condition B (500 volts ±10 percent).

Quality factor (Q): See table I (measured at frequency of 250 ±10 MHz).

Driving torque: Greater than or equal to 0.1 and less than or equal to 1.0 ounce-inch from -55°C through +125°C for capacitors with a range of .3 to 1.2 pF. Greater than or equal to 0.2 and less than or equal to 2.0 ounce-inches from -55°C through +125°C for all others.

Temperature coefficient and capacitance drift: J, 0 ±50 ppm/°C or K, 0 ±75 ppm/°C (see table I).

Thermal shock: Method 107 of MIL-STD-202, test condition B.

Immersion: Not applicable.

Marking: Not applicable; package shall be marked with the complete type designation and manufacturer's name or supply code.

CONCLUDING MATERIAL

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5910-F435)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.