
INCH-POUND
MIL-PRF-14409/16F
26 January 2021
SUPERSEDING
MIL-PRF-14409/16E
w/AMENDMENT 1
28 September 2007

PERFORMANCE SPECIFICATION SHEET


CAPACITOR, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC21, PC22, PC23, PC24

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this document and the latest issue of specification MIL-PRF-14409.

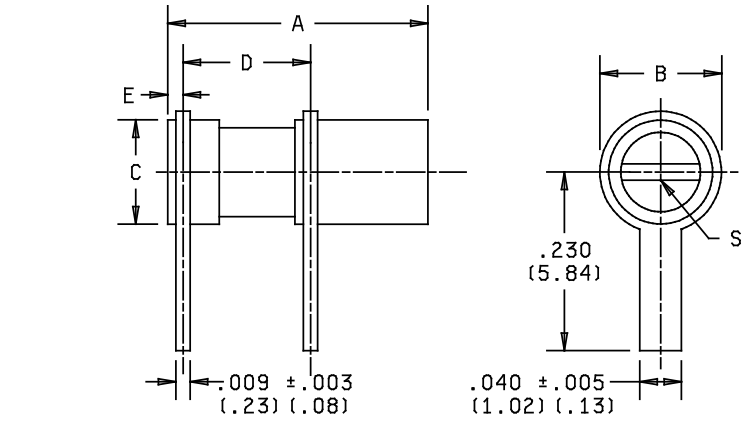


STYLE PC21

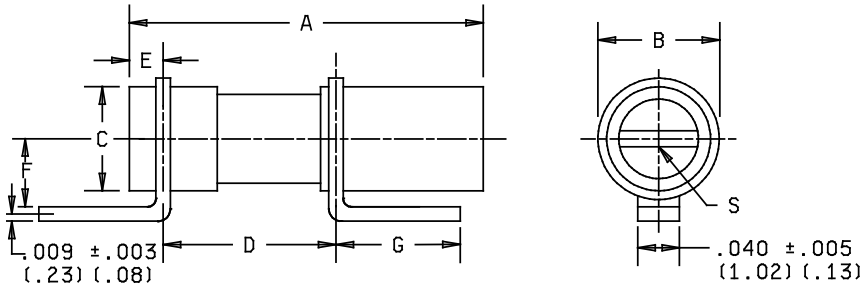


STYLE PC22

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

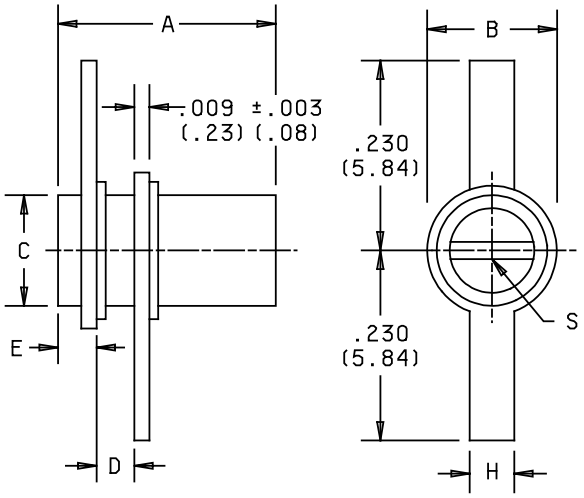

STYLE PC23

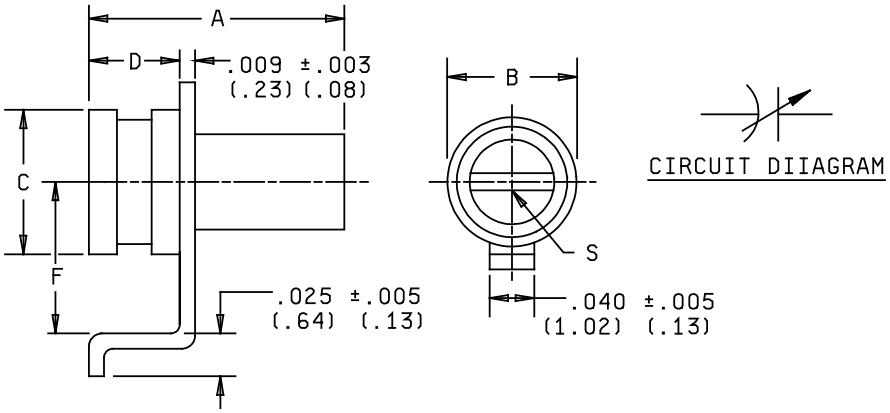

STYLE PC24

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ± .016 inch (0.41 mm).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Part or identifying number (PIN)	Capacitance range		Q Min	Capacitance drift	Dimensions 1/										
	Min (pF)	Max (pF)			A (Max)	B (Max)	C ±.005 (0.13)	D ±. .010 (0.25)	E ± .010 (0.25)	F ± .020 (0.51)	G ± .020 (0.51)	H ± .005 (0.13)	S Depth (Min)	S Width ± .005 (0.13)	S Length (Min)
PC21J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.082 (2.08)	.014 (0.36)	---	---	---	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC21J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.082 (2.08)	.014 (0.36)	---	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC21J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.130 (3.30)	.034 (0.86)	---	---	---	.010 (0.25)	.015 (0.25)	.070 (1.78)
PC21K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01)	.118 (3.00)	.250 (6.35)	.036 (0.91)	---	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC22J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.082 (2.08)	.014 (0.36)	.047 (1.19)	.183 (4.65)	---	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC22J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.082 (2.08)	.014 (0.36)	.070 (1.78)	.160 (4.06)	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC22J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.130 (3.30)	.034 (0.86)	.070 (1.78)	.160 (4.06)	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC22K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01)	.118 (3.00)	.250 (6.35)	.036 (0.91)	.070 (1.78)	.160 (4.06)	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC23J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.056 (1.42)	.018 (0.46)	---	---	.040 (1.02)	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC23J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.056 (1.42)	.018 (0.46)	---	---	.093 (2.36)	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC23J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.060 (1.52)	.060 (1.52)	---	---	.093 (2.36)	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC23K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01	.118 (3.00)	.05 (1.3)	.148 (3.76)	---	---	.093 (2.36)	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC24J1R2	.3	1.2	5,000	.02	.240 (6.10)	.114 (2.90)	.075 (1.90)	.09 (2.3)	---	.075 (1.90)	---	---	.010 (0.25)	.010 (0.25)	.040 (1.02)
PC24J2R5	.4	2.5	4,000	.02	.280 (7.11)	.158 (4.01)	.118 (3.00)	.09 (2.3)	---	.110 (2.79)	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC24J4R5	.6	4.5	3,000	.02	.369 (9.37)	.158 (4.01)	.118 (3.00)	.16 (4.1)	---	.110 (2.79)	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)
PC24K080	.8	8.0	1,500	.04	.566 (14.38)	.158 (4.01)	.118 (3.00)	.25 (6.4)	---	.110 (2.79)	---	---	.010 (0.25)	.015 (0.38)	.070 (1.78)

1/ Metric equivalents are given for general information only.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 500 volts.

Dielectric: Alumina or sapphire.

Capacitance range: See table I.

Insulation resistance: Not less than 10^6 megohms at room ambient temperature and not less than 10^5 megohms at +125°C.

Test condition B (500 volts ±10 percent).

Quality factor (Q): See table I (measured at frequency of 250 ±10 MHz).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.

Driving torque: Greater than or equal to 0.1 and less than or equal to 1.0 ounce-inch from -55°C through +125°C for capacitors with a range of .3 to 1.2 pF. Greater than or equal to 0.2 and less than or equal to 2.0 ounce-inches from -55°C through +125°C for all others.

Temperature coefficient and capacitance drift: J, 0 ±50 ppm/°C or K, 0 ±75 ppm/°C (see table I).

Thermal shock: MIL-STD-202-107, test condition A, except step 3 temperature shall be +125°C ±5°C.

Immersion: Not applicable.

Marking: Not applicable; package shall be marked with the complete PIN and manufacturer's name or supply code.

Referenced documents. In addition to MIL-PRF-14409, this specification sheet references the following document:

MIL-STD-202-107

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Air Force - 85
DLA - CC

Preparing Activity:
DLA - CC

(Project 5910-2021-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:15Z
Check the source to verify that this is the current version before use.