NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-14409/9E
11 May 1981
SUPERSEDING
MIL-C-14409/9D
15 March 1973

PERFORMANCE SPECIFICATION SHEET


CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC43

This specification sheets approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-PRF-14409.

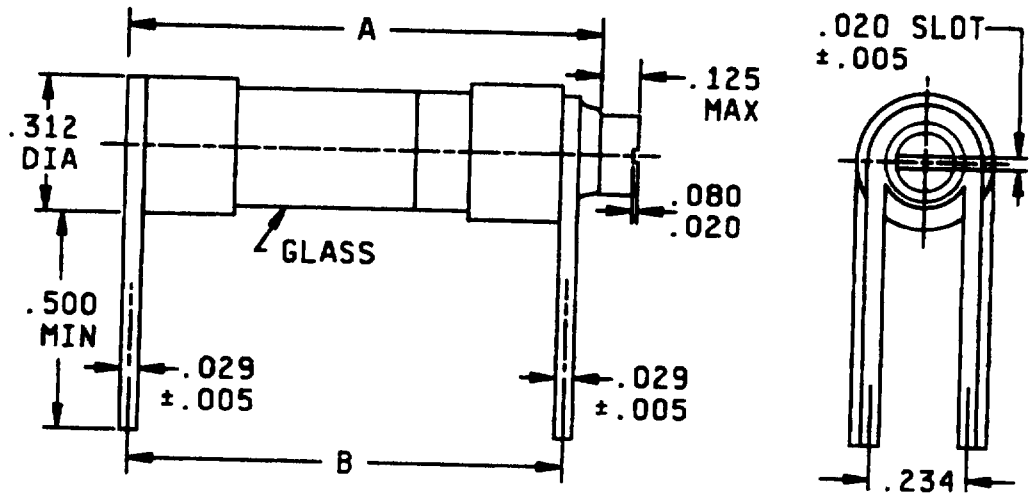

INCHES	MM
.005	.13
.016	.41
.020	.51
.029	.74
.080	2 03
.125	3.18
.234	5.94
.312	7.92
.500	12.70



SUGGESTED MOUNTING HOLES

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016.
4. This style capacitor is designed for printed-circuit mounting.

FIGURE 1. Dimensions and configuration.

(E) denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

DC voltage rating: 1,000 volts.

Construction: Sealed glass, see figure 1 and table I.

Dielectric material: Glass.

Capacitance range: See table I.

Insulation resistance (IR): Method 302 of MIL-STD-202, test condition B (500 volts ±10 percent): Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Quality factor (Q): See table I.

(E) Thermal shock: Method 107 of MIL-STD-202, test condition A, except the step 3 temperature shall be 125° ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Seal test: Applicable.

Rotational life:
Capacitance change versus rotation - No reversal greater than 2 percent.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Dimensions 1/		Q	Temperature coefficient parts/million/°C
	Min	Max	B ±.062 (1.57)	A ±.062 (1.57)		
	pF	pF				
PC43G160	1.0	16.0	.688 (17.48)	.734 (18.64)	750	±150
PC43G360	1.0	36.0	.922 (23.42)	.969 (24.61)	550	±150
PC43G520	1.0	52.0	1.141 (28.98)	1.188 (30.18)	350	±150
PC43G750	1.0	75.0	1.375 (34.93)	1.422 (36.12)	250	±150
PC43G121	1.0	120.0	1.984 (50.39)	2.031 (51.59)	250	±150
PC43J121	1.0	120.0	1.984 (50.39)	2.031 (51.59)	250	± 50
(F) PC43J600	1.0	60.0	1.328 (33.73) 2/	1.359 (34.52) 2/	250	± 50

1/ Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm. Millimeters are in parentheses.

(F) 2/ Dimension tolerance is ±.031 (.79).

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1369)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-14409/9E CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC43

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:13Z
Check the source to verify that this is the current version before use.