INCH-POUND

MIL-C-19516G(MC)
AMENDMENT-1
MAY 04 1992

MILITARY SPECIFICATION

COAT, MAN'S: POLYESTER/WOOL, GABARDINE; BLUE

This amendment forms a part of Military Specification MIL-C-19516G(MC), dated 6 March 1991, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 7

3.3.5.1.1 - At the end of operation add the following:

"As an alternate, needle punch fabric in lieu of flannel is permitted".

PAGE 8

3.3.9, line 5 - after "3/4", add "to 1 inch wide".
Line 6 after "be" delete "1-1/8" and add "1 to 1 1/8".

PAGE 9

3.3.15.1.2, line 4, - after "washer" add ", composite undercollar cloth, needle punch or felt, may be used".

PAGE 13

Under Pattern Nomenclature, After "item 38", add the following:

"39. Left Front shaper".

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

PAGE 16

Operation 1, paragraph E, 4th line - After number "3/4" add "to 1 inch wide".

PAGE 40

Operation 18, last line - Delete "6" and substitute "8".

PAGE 48

Operation 29a, line 2 - Delete "wool".

PAGE 69

At end of operation 46i, add the following:

"or when the alternate fusible front is used the following operations for the floating chest piece are required:

Make floating chest piece (see figure 10).

a. Spread the shoulder dart on the haircloth chest piece and stitch to wedge piece with edges overlapped. Notches on wedge piece pattern parts show spread of dart.

304	FSa-1 or LSa	4-8	70-2	70-2	

b. Abut or overlap 1/8 inch of the edge of the neckline and lower armhole darts on the haircloth chest piece and stitch together.

304	FSa-1 or LSa-1	4-8	70-2	70-2	

c. Position the haircloth reinforcement piece at the top front corner on the underside of the chest piece. Place the polyester/cotton cloth covering for the front edge on top of the haircloth chest piece with front and neckline edges even. Position the flannel/felt padding on the under side of chest piece and quilt together with vertical rows of stitching 3/8 to 3/4 inch apart and with curved rows toward the armhole. The padding shall extend beyond the armhole and the shoulder portion shall be left open to accommodate the shoulder pads.

304	4-8	70/2	70/2"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

PAGE 76

Operation 54b, line 16 - After "the" add "armhole".
Line 17, delete "bottom" and substitute "armhole".

PAGE 79

Operation 59, line 15 - After "for" delete "size 35 to 46" and substitute "all larger sizes".

PAGE 93

Operation 72d, line 7 - Delete "55" and substitute "56".

PAGE 109

Table IV, Test Methods under "Rqmt. Para." for "Material Identification", delete "3.3.5" and substitute "3.3.6". Under "Rqmt. Para" for "Weight - oz. per sq. yd.", delete "3.3.5" and substitute "3.3.6". Under "Rqmt Para." for "Color", delete "3.3.5" and substitute "3.3.6".

PAGE 111

4.5.3, under "Coat Size (S)" above "30 - 33" add "30 - 31". Second line delete "30 - 33" and substitute "32 - 33". Under "Form Size" above "30" add "28".

PAGE 125

Defect C 6, Line 3. - After "Pleat:" delete remainder of table and add the following new information:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	- more than 3/16 inch	129			
	- more than 1/4 inch		17		
	7. Top edge of flap not positioned midway between second and third buttonholes ± 3/16 inch.	130			

NOTE: Pockets must be in horizontal alignment with each other as required.

	8. Staypiece not tacked or not securely tacked to interlining across top edge of front center				336
	9. Polyester and cotton staypiece omitted on underside of one or both pockets.			272	
	10. Top edge of pocket less than 3/8 inch or more than 5/8 inch below the top stitching of flap.				337
	11. Top edge of flap crooked.			273	
	d. Upper pockets.				
	1. Binding on top edge omitted or not securely caught to fabric, causing binding to pull away from fabric.			274	
	2. One or both pocket corners not securely tacked.			275	
	3. Pleat off center 1/4 inch or more at lower edge of flap.	131			
	4. Pleat formed crookedly, affecting appearance.			276	
	5. Poorly shaped, not in conformity with pocket shaper.		18		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	6. Constructed with fold of pleat on the underside.	132			
	7. Pleat less than 1-1/8 inches or more than 1-3/8 inches wide (sizes 30-35).				338
	8. Pleat less than 1-3/8 inches or more than 1-5/8 inches wide (sizes 36-46).				339
	9. Front edge of pleat below flap not parallel with front edge of pocket by more than 3/16 inch.			277	
	10. Pleat not stitched closed.				340
	11. Bottoms of pockets out of horizontal alignment by:				
	- 1/4 inch or more but not more than 3/8 inch.			278	
	- more than 3/8 inch.	133			
	12. Front edge of pocket not parallel with front edge of coat when buttoned by:				
	0 - 3/16 inch or more but not more than 1/4 inch.			279	
	- more than 1/4 inch.	134			
	13. Excessive fullness or tightness at pocket opening, affecting appearance.			280	
	14. Button and buttonhole not aligned, causing noticeable bulge or twist on pocket or flap when buttoned, affecting appearance.			281	
	15. lower corner of pocket not trimmed.			281	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	e. Upper pockets and flaps measurements:				
	1. Length of flap (at center point), length of flap (at sides), width of pocket (at top edge, side to side edge), width of pocket (at bottom edge, side to side edge), length of pocket (top to bottom edge). Any of the above dimensions and tolerances included in Table III: Exceeding the ± 1/8 inch tolerance	135			
	f. Lower pocket flaps (position):				
	1. Out of horizontal alignment by 3/16 inch but not more than 3/8 inch.			282	
	- more than 3/8 inch	136			
	2. Flap not covering pocket opening:				
	- Front corner of 1 or both pockets.	137			
	- back corner of 1 pocket.				341
	- back corner of both pockets.			283	
	3. Lower side edge of flap extending beyond or both edges of or both pockets by more than 3/16 inch.				342

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	4. Front edge of flap out of vertical alignment with front edge of upper pocket 1/4 inch or more.			284	
	5. Lower side edge of flap (excluding rounded corners) not covering side edge of pocket by 1/8 inch or more but not more than 1/4 inch:				
	- front edge of 1 or both pockets.			285	
	- back edge of 1 or both pockets.				343
	6. More than 1/4 inch:				
	- front edge of 1 or both pockets.	138			
	- back edge of 1 or both pockets.			286	
	7. Front edge of flaps not parallel with front edge of coat by 1/4 inch or more when coat is buttoned.			287	
	8. Polyester and cotton staypiece not tacked or not securely tacked interlining at front corner.			288	
	9. Polyester and cotton staypiece omitted on underside of 1 or both pockets.			289	
	10. Top edge of flap not parallel with the waist seam by 1/4 inch or more.			290	
	g. Lower pockets:				

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor A	Minor B
	1. Binding on top edge omitted or not securely caught in fabric, causing binding to pull away from fabric.			291	
	2. One or both pocket corners not securely stitched.			292	
	3. Pockets poorly shaped, not in conformity with pocket shaper.		19		
	4. Distance between bottom edge of lower pocket and bottom edge of coat:				
	- less than 1 inch but not less than 3/4 inch.				344
	- less than 3/4 inch.			293	
	5. Bottom edge of pocket not parallel with bottom edge of coat by:				
	- 1/4 inch or more but not more than 3/8 inch.			294	
	- more than 3/8 inch.	139			
	6. Bottoms of pockets out of horizontal alignment by:				
	- more than 1/4 inch but not more than 1/2 inch.			295	
	- more than 1/2 inch.	140			
	7. Excessive fullness or tightness at pocket opening, affecting appearance.			296	
	8. Diagonal position of pocket (front edge from directly below flap to bottom edge) with front edge of coat.				
	- parallel with front edge.				345
	- slanted more than 3/8 inch from front			297	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)		Minor A	Minor B
	edge (i.e., towards side seam). - slanted 1/8 inch or more towards front edge.	141			
	9. Button and buttonhole not aligned, causing noticeable bulge or twist on pocket or flap.			298	
	h. Lower pockets and flaps measurements:				
	1. Length of flap (at center point), length of flap (at sides), width of flap (at top edge, side to side edge), width of pocket at bottom edge, (side edge to side edge) length of pocket (top to bottom edge) for Short, Regular Long and X-Long. Any of the above dimensions varying from nominal dimensions and tolerances included in Table III: Exceeding the ± 1/8 inch tolerance.	142			
Shoulder (construction)	Improper joined or set, causing shoulders or back to twist.		20		
Shoulder pads	a. Not completely caught in armhole tacking.			299	
	b. Misplaced, not serving intended purpose, i.e., too far back or too far forward.			300	
	c. One or both pads omitted.	143			

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Shoulder straps	a. Misplaced, i.e., one strap further forward or back from position of other strap affecting appearance.		201a	
	b. Strap stitched to coat too full or twisted, or stitched to coat too tight, causing fullness or twist on front or back of coat.	144		
	c. Poorly shaped.	145		
	d. Shoulder seam exposed beyond back edge of shoulder strap (except rounded end).		202a	
	e. Width of shoulder strap at armhole seam (including piping):			
	- less than 2-1/4 inches but not less than 2-1/8 inches.			346
	- more than 2-1/2 inches but not more than 2-5/8 inches.			347
	- less than 2-1/8 inches or more than 2-5/8 inches.		203a	
	f. Width of shoulder strap across center of insignia button (including piping):			
	- less than 1-1/2 inches but not less than 1-3/8 inches.			348
	- more than 2 inches but not more than 2-1/8 inches.			349
	- less than 1-3/8 inches or more than 2-1/8 inches.		204a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	g. Rounded end of shoulder strap positioned less than 1/4 inch or more than 3/8 inch from collar edge.			350
	h. Piping irregular in width, affecting appearance.		205a	
	i. Buttons not uniformly set from collar edge by more than 1/4 inch.		206a	
	j. Center of buttons less than 3/4 inch or more than 7/8 inch from rounded end of strap (including piping).			351
Armholes (construction)	a. Badly stretched.	21		
	b. Taped too tight, causing puckering around armhole seam, affecting appearance.	22		
	c. Crooked seam.			352
	d. Tape stitching exposed and visible on outside surface.			353
	e. Sleeve head pads not completely tacked to armholes, or misplaced, not serving intended purpose.		207a	
	f. One or both sleeve head pads omitted.		208a	
	g. Armhole not tacked completely or insecurely tacked.		209a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Sleeves	a. Setting and hang:			
	1. Sleeve fullness misplaced, affecting appearance.		210a	
	2. Sleeve too far front, i.e., front edge of sleeve less than 1 inch more than 2-1/2 inches from center point of lower pocket flap button.	23		
	3. Sleeve too far back, i.e., front edge of sleeve more than 1 to 2-1/2 inch back from center point of lower pocket flap button.	24		
	4. Hang of sleeves in opposite directions, i.e., one sleeve too far forward and one sleeve too far back, tolerance of 1-1/2 inches.	25		
	5. Sleeves tight in arm hole, i.e., roll effect not present at front or back of sleeve.	26		
	b. Sleeve lining:			
	1. Twisted, tight or short, causing bulge, twist or puckering on outside of sleeves.	27		
	2. Sleeve lining too long, causing lining to sag at bottom more than 1/2 inch.			354

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor A	Minor B
	3. Sleeve lining seams out of alignment more than 3/8 inch with sleeve seams at arm holes or at bottom of sleeves.				355
	c. Construction of sleeves:				
	1. Wigan twisted, tight, or pleated, causing ridges or puckering on outside of bottom of sleeves, affecting appearance.			211a	
	2. Tacking on bottom turn-up to wigan omitted or insecure.			212a	
	3. Sleeve bottom edge uneven by more than 1/4 inch.				356
	4. Tacking on 1 or both sleeve lining seams to sleeve seams omitted or insecure.				357
	5. Bottom edge of sleeve lining turnup less than 1 inch or more than 1-1/2 inches up from bottom edge of sleeve.				358
	d. Ornamental sleeve pieces:				
	1. Piping irregular, affecting appearance.			213a	
	2. Ornamental piece stitched to sleeve too full or twisted, affecting appearance.			214a	
	3. Length of ornamental piece (including piping) - less than 5-7/8 inches or more than 6-3/8 inches.	146			

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	4. Width at top, center, and bottom points (including piping): - less than 2-3/8 inches or more than 2-7/8 inches.	147		
	5. Poorly shaped, affecting appearance.		215a	
	6. Set on crookedly, affecting appearance.		216a	
	7. Misplaced, i.e., one piece further forward or back from position of other piece, affecting appearance.		217a	
	8. Bottom edge not horizontal with bottom edge of sleeve by more than 1/8 inch or edge extends beyond bottom edge of sleeve.		218a	
	9. Ornamental piece stitched to sleeve with pointed ends toward forearm seam of sleeve.	148		
	e. Position of buttons on ornamental pieces (measurements made from center of button):			
	1. From top and bottom edges (including piped edge): - less than 3/4 inch but not less than 1/2 inch.			359
	- more than 1 inch but not more than 1-1/4 inches.			360
	- less than 1/2 inch or more than 1-1/4 inches.		219a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Sleeves	a. Setting and hang:			
	1. Sleeve fullness misplaced, affecting appearance.		210a	
	2. Sleeve too far front, i.e., front edge of sleeve less than 1 inch more than 2-1/2 inches from center point of lower pocket flap button.	23		
	3. Sleeve too far back, i.e., front edge of sleeve more than 1 to 2-1/2 inch back from center point of lower pocket flap button.	24		
	4. Hang of sleeves in opposite directions, i.e., one sleeve too far forward and one sleeve too far back, tolerance of 1-1/2 inches.	25		
	5. Sleeves tight in arm hole, i.e., roll effect not present at front or back of sleeve.	26		
	b. Sleeve lining:			
	1. Twisted, tight or short, causing bulge, twist or puckering on outside of sleeves.	27		
	2. Sleeve lining too long, causing lining to sag at bottom more than 1/2 inch.			354

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	g. Rounded end of shoulder strap positioned less than 1/4 inch or more than 3/8 inch from collar edge.			350
	h. Piping irregular in width, affecting appearance.		205a	
	i. Buttons not uniformly set from collar edge by more than 1/4 inch.		206a	
	j. Center of buttons less than 3/4 inch or more than 7/8 inch from rounded end of strap (including piping).			351
Armholes (construc-tion)	a. Badly stretched.	21		
	b. Taped too tight, causing puckering around armhole seam, affecting appearance.	22		
	c. Crooked seam.			352
	d. Tape stitching exposed and visible on outside surface.			353
	e. Sleeve head pads not completely tacked to armholes, or misplaced, not serving intended purpose.		207a	
	f. One or both sleeve head pads omitted.		208a	
	g. Armhole not tacked completely or insecurely tacked.		209a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	e. Bottom corner of left front poorly shaped, affecting appearance.		232a	
	f. Left front rolling outward below bottom button.	31		
	g. Front edge irregular, affecting appearance.		233a	
	h. Left forepart overlapping right forepart at bottom. To measure the coat lying flat, match the side seams with the bottoms even. The right shall be 3-1/2 ± 1/4 inches from the outer finished edge of left front.			365
	i. Piping tight on front or bottom edge, causing puckering outside of coat, affecting appearance.		234a	
Front facings	Short, tight, or twisted, causing fullness or twists on fronts, affecting appearance.	32		
Back side panel seam	a. Not pressed open.		235a	
	b. Curved panel seam on back of coat stretched or distorted, affecting appearance.		236a	
Vent opening	a. Left vent edge stretched, causing vents to spread open, affecting appearance.		237a	
	b. Row of stitching across top of vent opening omitted or insecure or not caught through vent lining.		238a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	c. Left vent 1/4 inch or more shorter than right vent.			239a	
	d. Left vent 1/4 inch or more longer than right vent.				366
	e. Tape on left edge set on tight, causing puckering on vent edge, affecting appearance.			240a	
	f. Left vent edge crooked, affecting appearance.			241a	
	g. Left vent backpart overlapping right vent backpart at bottom edge: - less than 3-1/4 inches or more than 3-3/4 inches.				367
	h. Width of left vent measured at bottom piped edge: - less than 1-7/8 inches or more than 2-1/8 inches wide.				368
	i. Row of stitching across top of vent opening less than 1-5/8 inches or more than 2 inches long.				369
	j. Piping exposed and visible on left vent edge.				370
	k. Row of stitching across top of vent opening misplaced, not serving intended purpose.			242a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

4.5.3.4 Detailed defects of inside of coat (with coat spread on table). Detailed defects of inside of coat (with coat spread on table) shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Front buttonholes	a. Position from front edge (including piped edge): - less than 1/2 inch or more than 3/4 inch. (sizes 36 - 46.)		243a	
	- less than 3/8 inch or more than 5/8 inch. (sizes 30 - 35.)		244a	
	b. More than 1/4 inch from equal spacing.		245a	
	c. Bottom buttonhole above or below waist seam.		246a	
	d. Top buttonhole less than 3/4 inch or more than 1 inch from top edge of piping.		247a	
	e. Unevenly spaced from front edge by more than 3/16 inch.		248a	
Front buttons (positioned and secure sewing)	a. Out of vertical alignment by 1/4 inch or more.		249a	
	b. Center of buttons more than 3/8 inch off-center midway between front edge of upper pockets when buttoned.		250a	
	c. Button stitching caught through interlining (canvas front) but not facing: - on 1 button.			371
	- on 2 or more buttons.		251a	
	d. Button stitching not caught through interlining (canvas front) on 1 or more buttons.	150		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A		Minor B
Belt loops	a. Loops less than 3/8 inch or more than 5/8 inch wide.			372
	b. Length of belt loop from top to bottom folded edge: - less than 2-3/8 inches or more than 2-5/8 inches.			373
	c. One or both belt loops placed less than 1/8 inch or more than 5/8 inch from back end of lower pocket flap(s).			374
	d. Bottom folded end of loop more than 1/4 inch above top edge of lower flap.			375
	e. Bottom end of loop bartacked through double fold exposing bartack.			376
	f. Omitted: - 2 loops.	151		
	- 1 loop.		252a	
	g. Loops not perpendicular by: - more than 1/4 inch but not more than 1/2 inch.			377
	- more than 1/2 inch.		253a	
	h. Top folded end of loop bartacked to forepart less than 1/8 inch or more than 1/4 inch from folded end.			378
Labels	a. Any required label missing, incorrect, illegible or size label not securely caught in stitching.		254a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)		Minor A	Minor B
	b. Woven instruction or identification label not stitched on 4 sides or not positioned as specified to the outside of right facing.				379
Hanger	a. Hanger omitted or ends not securely stitched.			255a	
	b. Less than 1-7/8 inches or more than 2-1/8 inches long measured along collar seam.				380
	c. Hanger not stitched to neck of coat prior to seaming collar to neck of coat.				381
Front facing	a. Fullness or pleats on facings between buttons, buttonholes or between front edge and buttons or buttonholes when buttoned.				382
	b. Tacking on back edge to 1 or both interlinings: - omitted. - insecure or incomplete for a distance of more than 5 inches below shoulder seams, or more than 4 inches above bottom edge of lining.			256a	383
	c. Tacking at back lower edge of facing caught through 1 or both pockets.			257a	
	d. Tacking at back edge of 1 or both facings from bottom edge across scarlet piping omitted or insecure.				384
Back yoke lining	a. Excessive fullness or pleats.				385

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)		Minor A	Minor B
	b. Twisted, not affecting smoothness on outside surface of back.				386
	c. Hem twisted, or width less than 1/4 inch or more than 1/2 inch wide.				387
	d. Bottom raw edge of yoke not turned under in stitching forming hem.				388
	e. Pleat in center of yoke lining omitted.			258a	
	f. Folded edge of center pleat facing the right side of coat.				389
	g. Felling at lower edge of yoke lining to side seam outlet omitted or insecurely felled on one or both sides.				390
Front body linings	a. Excessive puckering or pleated.				391
	b. Twisted, not affecting smoothness on outside of coat.				392
	c. One or both chest pleats on shoulder omitted.			259a	
	d. Folded edge of 1 or both chest pleats facing toward the shoulder.				393

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	e. Felling on 1 or more front or back lower corners of forepart lining omitted or insecurely felled to facings or forepart side seam allowance.				394
	f. Back stitch at lower arm-hole edge from approximately 1-1/2 inches to front of forearm sleeve lining seam to side seam of body lining omitted.				395
	g. Hem twisted, or width less than 1/4 inch or more than 1/2 inch wide.				396
	h. Bottom raw edge of body lining not turned under in stitching forming hem.				397
Waist seam	Tape on 1 or both waist seams omitted.			260a	
Collar lining and eyelet covers	a. Collar lining tab left end of collar omitted or extending beyond collar end for a distance of less than 3/4 inch.			261a	
	b. Stitching on end, side edges, or across width of collar tab omitted.			262a	
	c. Ends of collar lining not securely tacked.			263a	
	d. 1 or both eyelet covers omitted.			264a	
	e. 1 or both eyelet covers not covering eyelet.			265a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	f. Width of collar eyelet covers less than 1-5/8 inches or more than 1-7/8 inches.				398a
	g. Felling on front edge and along lower corner of 1 or both eyelet covers omitted.			266a	
	h. Felling along lower corner of 1 or both eyelet covers extending for a distance of more than 3/4 inch.				399a
	i. Hand felling of lining across the full width at the left or right end of collar omitted.			267a	
Right vent lining	a. Top edge not completely covering edges of center back seam outlets.			268a	
	b. Felling at corners of vent openings omitted or insecure.			269a	
	c. Folded edge of lining not extending beyond center seam allowance of right backpart.				400
	d. Tight, short, or twisted, causing fullness or twist outside of coat.			270a	
Binding on seam outlets	a. Not securely caught on fabric, causing binding to pull away from fabric easily.			271a	
	b. Binding tight, causing edge of seams to curl and not lie flat.				301a

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.


Custodian:
Navy-MC

Preparing Activity:

DLA - CT

Project No. 8405-N177

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:06Z
Check the source to verify that this is the current version before use.

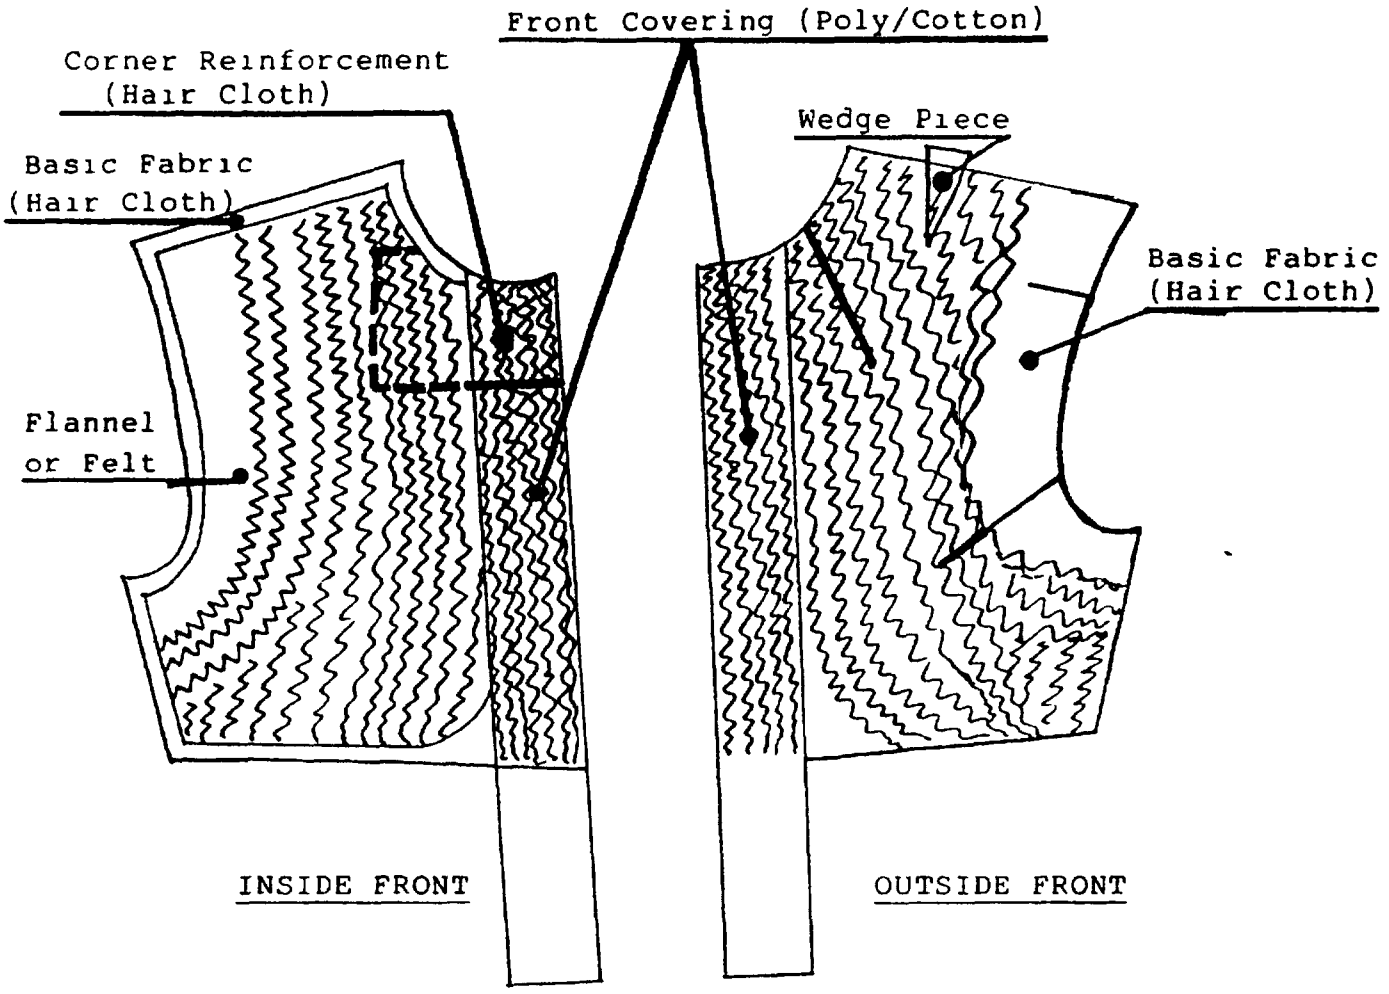

ALTERNATE FLOATING CHEST PIECE
FOR FUSED FRONT, COAT, DRESS BLUE,
MAN'S MARINE CORPS

FIGURE 10

COAT, MAN'S: POLYESTER/WOOL, GABARDINE BLUE

Source: https://assist.dla.mil -- Downloaded: 2026-03-19T06:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-19516G Amendment-1	2. DOCUMENT DATE (YYMMDD) 92-05-04

3. DOCUMENT TITLE
Coat, Man's: Polyester/Wool, Gabardine Blue

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DLA-CT	b. TELEPHONE (Include Area Code) (1) Commercial (215)737-8102 (2) AUTOVON 444-8102
c. ADDRESS (Include Zip Code) 2800 South 20th Street Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil. Downloaded: 2006-10-19T06:06Z
Check the source to verify that this is the current version before use.