MIL-I-19578D(NU)
9 November 1979
SUPERSEDING
MIL-I-19578C(SA)
31 January 1973

MILITARY SPECIFICATION

INSIGNIA, GRADE, ENLISTED PERSONNEL, METAL

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for metal collar insignia denoting rank of enlisted personnel of the Navy and Marine Corps.

1.2 Classification The insignia shall be of two types in the following classes and shall be furnished as singles or in pairs, as specified (see 6.2).

Type I - Marine Corps

Class	1	Sergeant Major (Marine Corps)
	2	Sergeant Major
	3	Master Gunnery Sergeant
	4	First Sergeant
	5	Master Sergeant
	6	Gunnery Sergeant
	7	Staff Sergeant
	8	Sergeant
	9	Corporal
	10	Lance Corporal
	11	Private First Class

Type II - Navy

Class	1	Master Chief Petty Officer
	2	Senior Chief Petty Officer
	3	Chief Petty Officer

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

Type II - Navy (cont'd)

Class	4	Petty Officer 1/C (left only)
	4A	Petty Officer 1/C (right only)
	5	Petty Officer 2/C (left only)
	5A	Petty Officer 2/C (right only)
	6	Petty Officer 3/C (left only)
	6A	Petty Officer 3/C (right only)
	7	Group Rate Seaman (right only)
	7A	Group Rate Seaman (left only)
	8	Group Rate Apprentice (right only)
	8A	Group Rate Apprentice (left only)

2. APPLICABLE DOCUMENTS

*2.1 Issues of documents The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-676	- Boxes, Set-up

MILITARY

MIL-F-495	- Finish, Chemical, Black, for Copper alloys
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-151	- Metals, Test Methods

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:15Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

DRAWINGS

NAVY CLOTHING AND TEXTILE RESEARCH FACILITY

16-1-1	Insignia, Grade, Enlisted Personnel Metal; For Chief, Senior and Master Chief Petty Officers (Navy)
16-1-2	Insignia, Grade, Enlisted Personnel, Metal; For 1/C, 2/C, and 3/C Petty Officers (Navy)
16-1-3	Insignia, Grade, Enlisted Personnel, Metal; For Apprentice and Seaman Group Rates (Navy)

(Miniature copies of Drawings 16-1-1, 16-1-2, and 16-1-3, are attached as figures 1, 2, and 3 respectively).

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless a specific issue is indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Traffic Dept., 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606).

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

3.1.1 Government loaned property Hubs, when furnished by the Government, shall be used only for making the contractor's working dies. The contractor's stamping and embossing dies shall be tooled and polished to remove dents, scratches and all other imperfections. (see 6.4).

3.1.2 Approved contractor sample When hubs are not available, all requirements specified for the applicable insignia and as exhibited by the approved contractor's sample shall apply (see 6.5).

*3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.3 Materials

3.3.1 Copper base alloy The copper base alloy from which the insignia shall be made shall be free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregations and foreign inclusions that will not be removed in later processing. The alloy shall conform to the chemical composition specified in Table I when tested as specified in 4.3.1.

Table I - Chemical composition of alloys (percent)

Alloy	Copper	Nickel	Lead (max)	Iron (max)	Others (max)	Zinc
Red Brass	84.0-86.0	-	.05	.05	.15	Remainder
Yellow Brass	64.0-68.5	-	.15	.05	.15	Remainder
Nickel Silver	63.0-66.5	16.5-19.5	.10	.25	.50	Remainder

*3.3.2 Chemical finish The black chemical finish shall conform to MIL-F-495.

*3.3.3 Enamel The enamel shall be a dead-flat black synthetic baking type and shall be tested as specified in 4.3.1.

3.3.4 Hard solder The hard solder shall be a silver alloy having a minimum melting point of 1,075°F (see 3.6.3).

3.3.5 Attaching device The attaching device shall be a prong and clutch of the type shown in figure 4. The prong shall be of the nickel-silver alloy specified in Table I and the clutch fastener shall be brass conforming to the chemical compositions specified in Table I when tested as specified in Table II. In addition, the attaching device shall remain functional after testing as specified in 4.5.1. When the size of the insignia is a limiting factor, the clutch may be 3/8 (± 1/32) inch in diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

3.4 Design The design of the metal insignia shall be exact replicas of the designs extracted from the Government loaned hubs. Where hubs are not applicable, the insignia shall conform to the approved guide sample or as shown in applicable figure.

3.5 Figures Figures are furnished for information purpose only.

3.6 Construction

3.6.1 Stamping, trimming and piercing The metal insignia shall be struck in such a manner to insure a well defined die struck edge. The insignia shall be trimmed, and when applicable, pierced to the die struck outline. All edges shall be clean, smooth, free from burrs, drag, step and rough edges. The stamping, trimming and piercing operations shall not damage or distort the design of the insignia.

3.6.2 Forcers The use of forcers is not permitted.

3.6.3 Soldering and electronic fusion All soldering shall be accomplished using solder specified in 3.3.4. Soldered joints shall be cleaned of excess solder and flux and shall not crack or separate when tested as specified in 4.5.2. As an alternate, prongs may be electronically fused and shall not separate at the fused joint when tested as specified in 4.5.3.

*3.6.4 Chemical finishing All surfaces and edges of insignia, before enameling, shall be treated with the black chemical finish specified in 3.3.2.

3.6.5 Enameling. The face, outer edges and edges of piercings of the chemically finished insignia shall be thoroughly coated with the enamel specified in 3.3.3. The baked enamel shall not flake or chip when tested as specified in 4.5.4.

3.7 Measurements Measurements of the finished insignia and attaching device shall be as indicated by figures 1 thru 6, except that the minimum thickness of the finished insignia, measured at its thickest point, shall be as follows:

Type II, Classes 1, 2 and 3:

Anchor	- 0.100 inch
Star	- 0.100 inch
USN	- 0.060 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

Type II, Classes 4, 4A, 5, 5A, 6 and 6A - 0.090 inch

Type II, Classes 7, 7A, 8 and 8A - 0.060 inch

3.8 Marking for identification The contractor shall stamp his trademark or other identifying mark, legibly, and inconspicuously on the back of each insignia.

3.9 Workmanship The finished insignia shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance Where certficiates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection The first article submitted in accordance with 3.2 shall be inspected as specified in 4.3.3 for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.3.1 Component and material inspection In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, the materials listed in Table II shall be tested for the characteristics specified and in accordance with the referenced test methods. The values specified in Section 3, except where otherwise specified, apply to the average of the determinations made on the sample unit for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results. The sample unit shall be as indicated in Table II. The sample size shall be as indicated below. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified.

Lot size	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

*Table II - Testing of Components

Component and unit of product	Characteristic	Specification reference		Sample unit	No. of determinations per sample unit	Results reported as
		Requirement paragraph	Test method			
Copper base alloy	Chemical composition	3.3.1	Method 111 or 112 of FED-STD-151	4 oz. (composite)	2	to nearest 0.01 percent
Enamel	Material identification	3.3.3	1/			
Hard Solder	Material Identification	3.3.4	1/			
Attaching device	Material Identification	3.3.5	1/			

1/ A Certificate of compliance shall be submitted for this characteristic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

*4.3.2 In-process inspection Inspection may be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection had indicated non-conformance.

4.3.3 Examination of the end item Examination of the end item shall be in accordance with 4.3.3.1 and 4.3.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.3.3. The sample unit shall be one finished insignia. The lot size shall be expressed in units of insignia.

*4.3.3.1 Visual examination The finished insignia shall be examined for defects in design, workmanship, color, finish and marking. Defects designated by an asterisk (*) shall be classified as a major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance but not seriously.

Examine	Defect	Classification Major	* Minor
I Color	1. Color and/or finish is a poor match to approved sample		*
	2. Color not flat black		*
	3. Color missing (any area)		*
II Enamel	1. Not enameled	X	
	2. Cracked, chipped or crazed	X	
	3. Bubbles, lumps, imbedded foreign matter or blemish		*
	4. Hole or blister		*
	5. Coarse or uneven		*
	6. Discoloration or stain, clearly noticeable		*
III Design, construction and Workmanship	1. Not design specified	X	
	2. Detail not definitive		*
	3. Detail double struck		*
	4. Edge not trimmed		*
	5. Not pierced where required	X	
	6. Piercing not clean and smooth		*
	7. Design forced	X	
	8. Insignia distorted, bent, or malformed		*
	9. Surface pitted, porous nicked, dented or scratched		*
	10. Any letter or star missing or not positioned as specified	X	
	11. Any burr, fin, step, rough or sharp edge		*
	12. Metal cracked or fractured	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	*	Minor
III Design, construction and workmanship (cont'd)	13. Any area burned or reduced in soldering		*	
	14. Any solder on face or edge of insignia	X		
	15. Excess solder on back not removed			X
IV Attaching device	1. Not type specified	X		
	2. Any component part missing	X		
	3. Prong bent affecting use		*	
	4. Does not function properly		*	
	5. Not positioned as specified		*	
V Marking	Missing, illegible, not placed inconspicuously			X

4.3.3.2 Dimensional examination The insignia shall be examined for defects in dimension. Any measurement not within the specified tolerances shall be considered a defect. The sample unit shall be one finished insignia. The lost size shall be expressed in units of finished insignia.

*4.3.3.3 Inspection levels and acceptable quality levels The inspection levels and acceptable quality levels (AQL's), expressed in defects per 100 units, shall be as follows:

	Inspection level	AQL's Major	Total
For visual examination in 4.3.3.1	II	2.5	15.0
For dimensional examination in 4.3.3.2	S-3	One class	4.0

4.3.4 Examination of packaging requirements An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per one hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:15Z
Check the source to verify that this is the currentversion before use.

Examine	Defect
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling, incorrect application of tape. Bulging or distortion of containers.
Content	Number of insignia per intermediate container is more or less than specified. 1/
	Number of intermediate containers per shipping container is more or less than specified.

1/ For this defect, one intermediate container from each shipping container in the inspection lot shall be examined.

*4.4 Testing of the end item Testing of the completely fabricated insignia shall be performed in accordance with Table III for the characteristics shown therein. The sample unit for end item testing except for fused prongs, shall be two completely fabricated insignia for each grade; for fused prongs, the sample unitshall be one insignia. The requirements are applicable to the individual unit and except for fused prong testing, with one determination per sample unit; for fused prongs, all prongs on that item will be tested, however, one defect will be scored regardless of how many prongs on that item fails. The results shall be reported as pass or fail. Except for fused prong testing the inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units; for fused prong testing, the inspection level shall be S-2 and the AQL 6.5 DHU.

*Table III - End item testing

Characteristic	Requirement paragraph	Test method
Functioning of attaching devices	3.3.5	4.5.1
Stability of soldered joints	3.6.3	4.5.2
Stability of fused joints	3.6.3	4.5.3
Test for baked enamel	3.6.5	4.5.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

4.5 Tests

4.5.1 Functioning of attaching devices The clutch fastener shall be removed from each prong of the attaching device and replaced 10 times, after which it shall not be possible to remove the clutch fastener from its prong except by depressing the release wings.

4.5.2 Stability of soldered joints The sample of the insignia to be tested shall be placed in an oven maintained at 1065° F (± 5°F) for not less than 15 minutes. While at the specified temperature, the insignia shall be lifted by the smaller of the soldered parts and the soldered area shall be examined for evidence of separation of the parts.

*4.5.3 Stability of electronically fused joints Item to be tested shall be anchored on a horizontal surface. All prongs on each end item shall be grasped at least 1/3 its length above the fused joint and bent thru an angle of 90 degrees (45 degrees to each side of the vertical) until separation occurs. The fused joint shall then be examined to determine compliance with 3.6.3. A bending tool in the form of 45 degrees template may be used for this test provided the prong is gripped at least 1/3 its length above the fused joint.

*4.5.4 Test for baked enamel Draw a knife edge across the face side of the specimen making four parallel scores one sixteenth inch apart. Repeat this process drawing the knife edge this time perpendicular to the previously scored lines, making small blocks in the finish. No flaking or chipping of the small blocks shall occur.

5. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

5.1 Preservation-packaging Packaging shall be level A or C as specified (see 6.2).

*5.1.1 Level A A single or pair of insignia shall be mounted on a white sulfite card with the clutch fasteners attached. The card shall be cut 2 ½ inches square and have a minimum thickness of 0.011 inch. The mounted insignia shall be individually packaged in a snug-fitting transparent polyethylene bag having a minimum thickness of 0.002 inch. All seams and closures shall be effected by heat sealing. Prior to or during the heat sealing operation, excess air within the bag shall be expelled. Fifty units thus packaged, of one type and class only, shall be placed, with the insignia face to face, in a paperboard intermediate container 7 inches long, 5 5/8 inches wide, and 2 1/2 inches high, outside dimensions. The container shall conform to type I, variety 1, class A, style 4 of PPP-B-676.

5.1.2 Level C (Commercial packaging) Insignia shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or C as specified (see 6.2)

5.2.1 Level A Twelve intermediate containers, containing one type and one class of insignia only and packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type SF, class weather-resistant, grade V2s, size 1 of MIL-B-17757. Toward the end of the contract, or when there is less than the required amount per container of the same type and class, mixed classes may be packed within the same container.

5.2.2 Level B Twelve intermediate containers, containing one type and one class of insignia only and packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, grade 275, size 1 of MIL-B-17757. Toward the end of the contract, or when there is less than the required amount per container of the same type and class, mixed classes may be packed in the same container.

*5.2.2.1 Weather-resistant fiberboard containers When specified (see 6.2), the shipping container shall be a grade V3c, W5c or W6c fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

5.2.3 Level C (Commercial packing) Insignia, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract or order, unit packages, interior packages and shipping containers shall be marked in accordance with MIL-STD-129, except unit package marking may be printed on the reverse side of the mounting card provided the printing is legible thru the bag.

5.3.1 Mixed classes Each shipping container packed with mixed classes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 X 4 inches with the words "MIXED CLASSES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity of each contained therein.

6. NOTES

6.1 Intended use The insignia covered by this specification is for wear by enlisted personnel of the Navy and Marine Corps.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type and class of insignia required, singles or pairs (see 1.2).
c. Requirements for the first article (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Guide sample For access to guide samples, address the procuring office issuing the invitation for bids (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

6.4 Government loaned hubs For access to the Government hubs, address the procuring activity or the Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760.

*6.5 Approved contractor sample A contractor submitting a sample for Government approval shall forward the sample to the procuring activity or to the Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick MA 01760.

6.6 Changes from previous issue The margins of this specification are marked with an asterisk to indicate where changes (additions, modification, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU


Review Activity:
Navy - MC

Preparing Activity:
Navy - NU


Project No. 8455-N569

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:15Z
Check the source to verify that this is the current version before use.

REVISIONS						
SYM	BY	DR	CK	DISCRIPTION	DATE	APPR
A	D-24M	KR	[illegible]	ADDED (TYP) TO 15/16 PIN POST LOCATION	19 NOV 72	DC




CLASS 1
MASTER CHIEF PETTY OFFICER



CLASS 2
SENIOR CHIEF PETTY OFFICER



CLASS 3
CHIEF PETTY OFFICER



CHARACTERS



STAR


NOTES:

1. BASIC SPECIFICATION MIL-I-19578 GOVERNS.
2. FOR CORRECT DESIGN SEE APPLICABLE HUB.
3. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.
4. TOLERANCES:
   FRACTIONAL DIMENSIONS ±1/32
   OTHER TOLERANCES AS SPECIFIED

FIG. 1 INSIGNIA, GRADE, ENLISTED PERSONNEL: METAL (NAVY)
CHIEF PETTY OFFICER

FIG. 1 THIS FIGURE IS A MINIATURE COPY OF THE ISSUE OF DRAWING 16-1-1 IN EFFECT ON THE DATE OF SPECIFICATION APPROVAL, AND IS FOR INFORMATION ONLY. THE ISSUE OF THE DRAWING REFERENCED IN THE CONTRACT SHALL GOVERN.

Source: https://assist.dla.mil -- Downloaded: 20260-19T06:15Z
Check the source to verify that this is the current version before use.

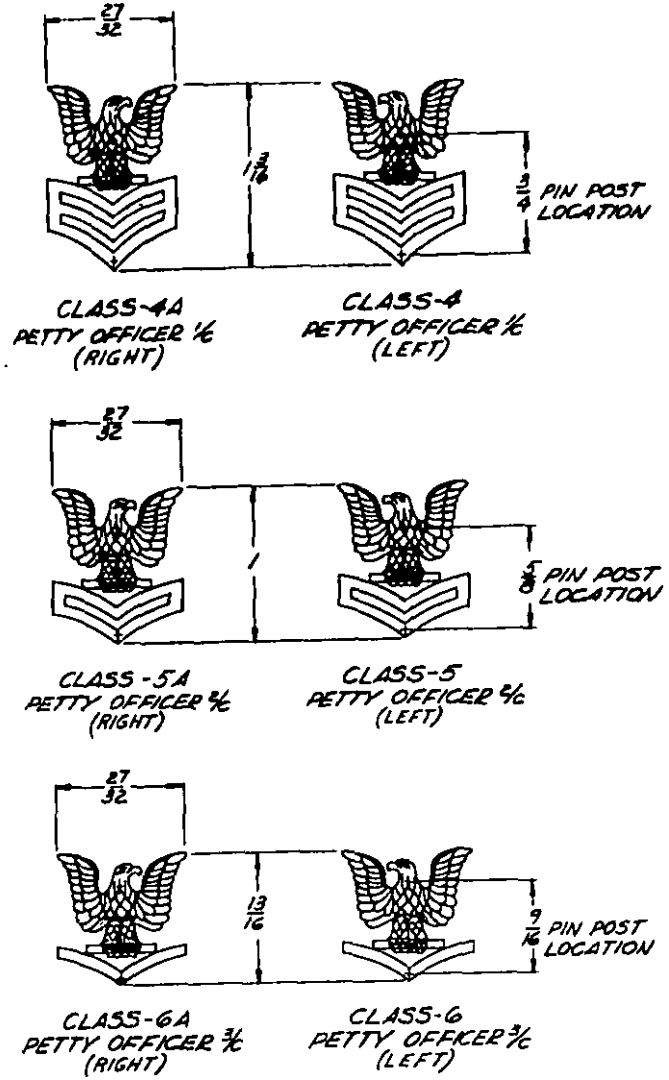

NOTES:
1. BASIC SPECIFICATION MIL-I-19578 GOVERNS.
2. FOR CORRECT DESIGN SEE APPLICABLE NUB.
3. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.
4. TOLERANCES: FRACTIONAL DIMENSIONS ± 1/32
OTHER TOLERANCES AS SPECIFIED


REV	DATE	REMARKS
A	[illegible]	CHGD RIGHT DESIG TO LEFT & LEFT TO RIGHT; ADDED TITLE

FIG. 2 THIS FIGURE IS A MINIATURE COPY OF THE ISSUE OF DRAWING 16-1-2 IN EFFECT ON THE DATE OF SPECIFICATION APPROVAL, AND IS FOR INFORMATION ONLY THE ISSUE OF THE DRAWING REFERENCED IN THE CONTRACT SHALL GOVERN.

FIG. 2 - INSIGNIA, GRADE, ENLISTED PERSONNEL, PETTY OFFICERS, METAL (NAVY)


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

REVISIONS						
SYM	LTR NO.	DR	CK	DESCRIPTION	DATE	APPR
A	D-2014	RJK	[illegible]	DELETED CLUTCH FASTENER AND PIN POST	11 NOV 72	D.B.

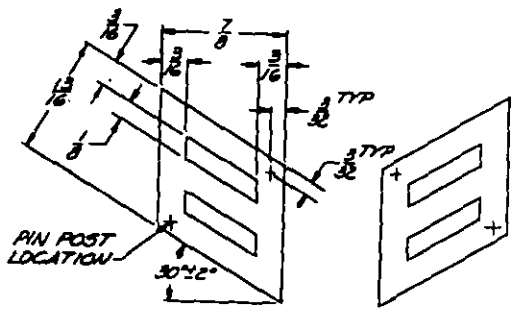

CLASS-7
GROUP RATE SEAMAN
(RIGHT)

CLASS-7A
GROUP RATE SEAMAN
(LEFT)

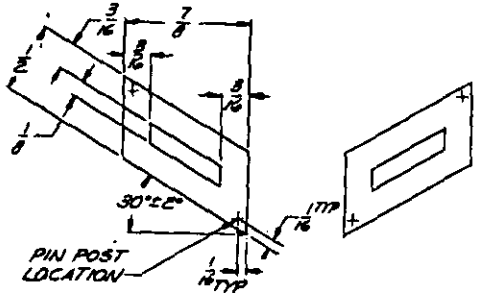

CLASS-8
GROUP RATE
APPRENTICE
(RIGHT)

CLASS-8A
GROUP RATE
APPRENTICE
(LEFT)


NOTES:

1. BASIC SPECIFICATION MIL-I-19578 GOVERNS.
2. FOR CORRECT DESIGN SEE APPLICABLE HUB.
3. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.
4. TOLERANCES:
   FRACTIONAL DIMENSIONS ± 1/32
   OTHER TOLERANCES AS SPECIFIED

FIG. 3 INSIGNIA, GRADE, ENLISTED PERSONNEL: METAL (NAVY)
SEAMAN AND APPRENTICE

FIG 3 THIS FIGURE IS A MINIATURE COPY OF THE ISSUE OF DRAWING 16-1-3 IN EFFECT ON THE DATE OF SPECIFICATION APPROVAL, AND IS FOR INFORMATION ONLY. THE ISSUE OF THE DRAWING REFERENCED IN THE CONTRACT SHALL GOVERN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

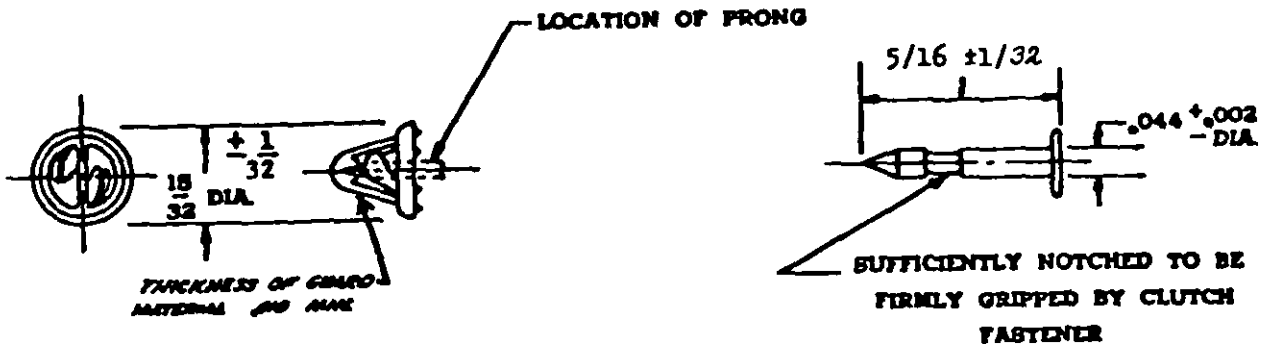

PRONG AND CLUTCH TYPE

FIGURE 4 METAL ATTACHING DEVICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

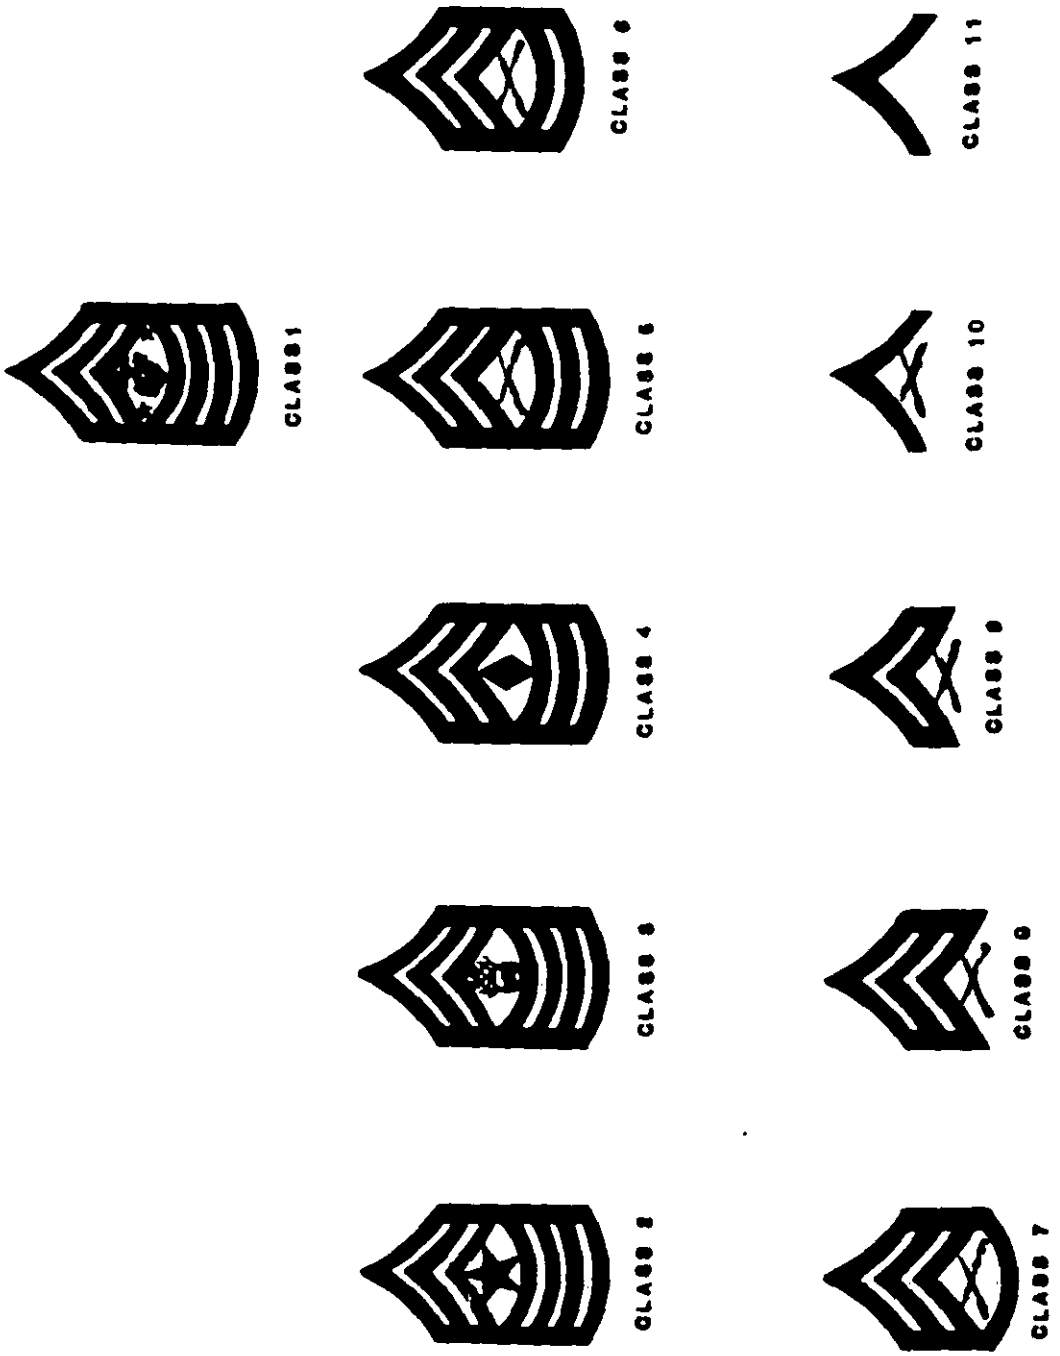


FIGURE 5. INSIGNIA, GRADE, ENLISTED PERSONNEL, METAL (TYPE I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

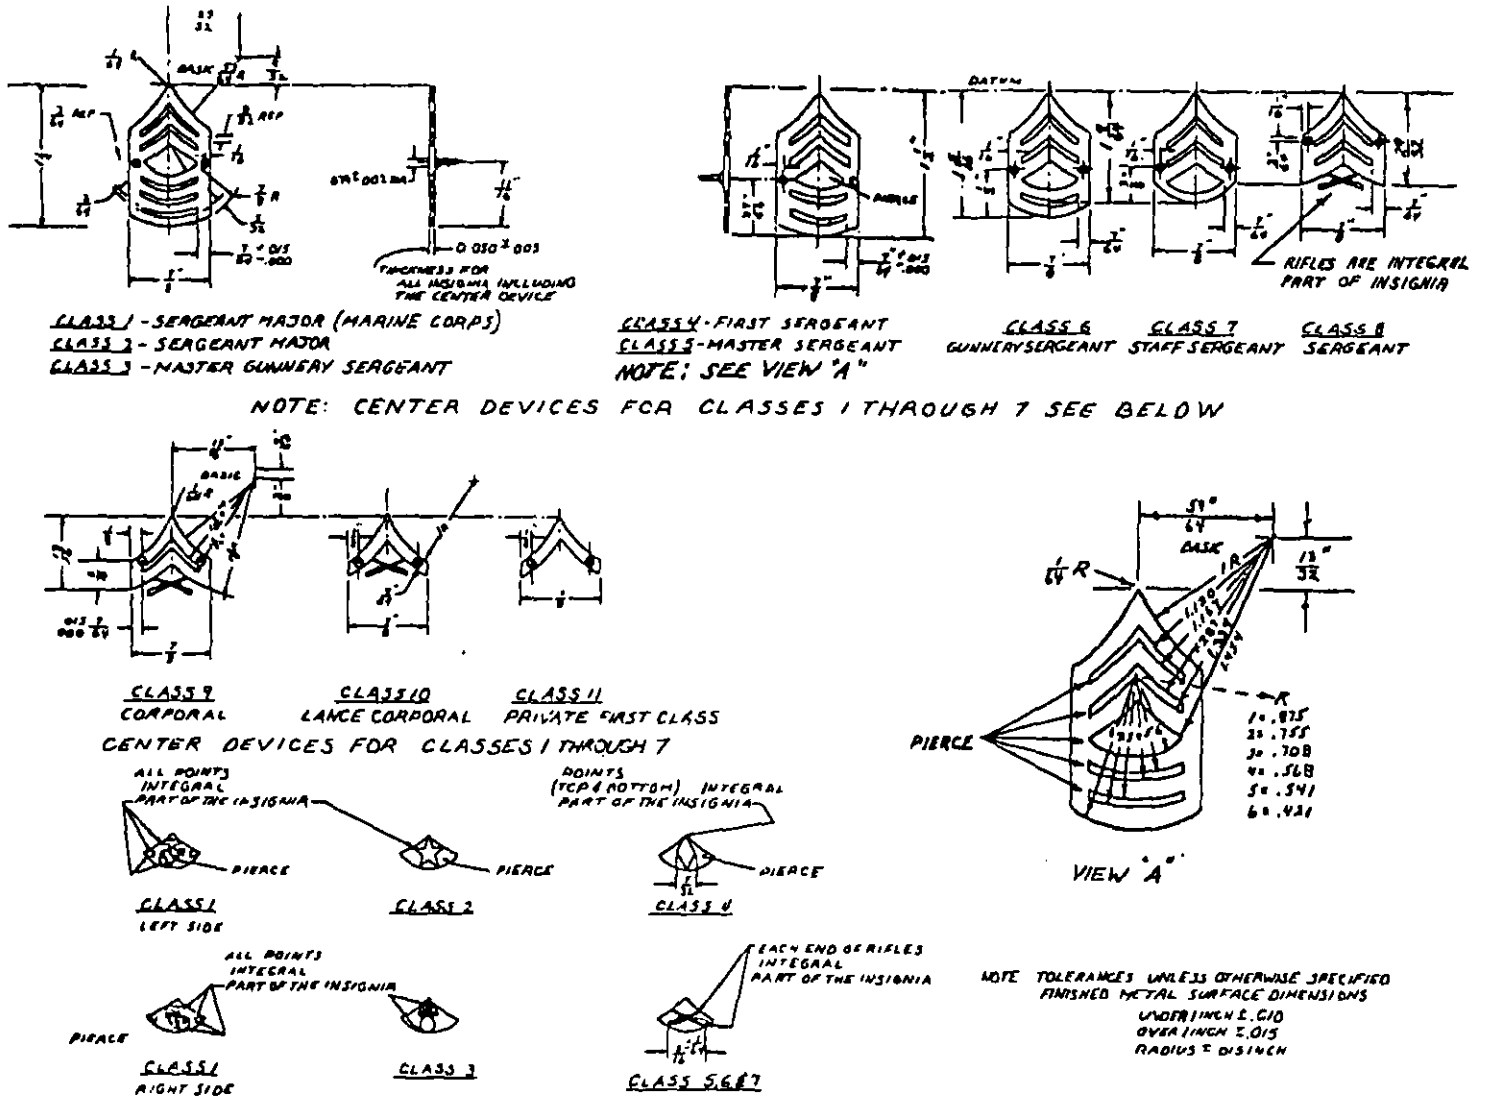


FIGURE 6. INSIGNIA, GRADE, ENLISTED PERSONNEL, METAL (TYPE I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-I-19578D(NU) Insignia, Grade, Enlister Personnel, Metal

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:15Z
Check the source to verify that this is the current version before use.