MILITARY SPECIFICATION

REGULATOR, AIR, DEMAND, DIVER'S

This amendment forms a part of Military Specification MIL-R-19558A(SHIPS), 17 May 1960.

Page 2, paragraph 3.3: Delete and substitute:

"3.3 The demand regulator may be either a single or two stage type. The demand regulator shall be configured such that when mounted on a cylinder manifold, it shall not extend toward the diver's head more than 3-3/4 inches from the center of the manifold as shown on figure 6."

Page 2, paragraph 3.10: Add as last sentence:

"The inlet and outlet breathing tubes shall be located such that the inlet breathing tube shall be to the diver's right side and the outlet breathing tube shall be to the diver's right side and the outlet breathing tube shall be to the diver's left side (see figure 6)."

Page 6, paragraph 4.1: Delete and substitute:

"4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

Page 6: Add the following as "Figure 6"

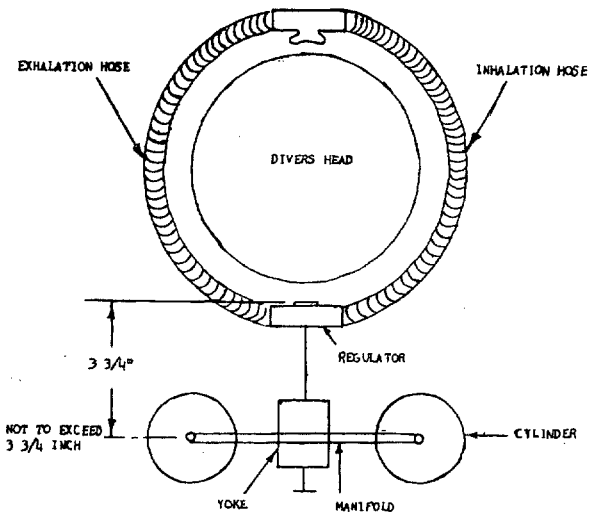


Figure - 6.

Preparing activity:
Navy - Ships
(Project 4220-N037Sh)

FSC 4220

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:13Z
Check the source to verify that this is the current version before use.