MIL-S-19542C(MC)
4 August 1972
SUPERSEDING
MIL-S-19542B(MC)
12 July 1966

MILITARY SPECIFICATION

SHIRT, WOMAN'S: BROADCLOTH, POLYESTER AND COTTON, WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

*1.1 Scope. This specification covers requirements for a white, broadcloth, polyester and cotton short sleeve shirt.

1.2 Classification. The shirt shall be of one type in the following sizes, as specified (see 6.2):

Schedule of sizes

28	30	32	34	36	38	40	42

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, And Button, Staple (Plastic).
V-T-276	- Thread, Cotton.
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
DDD-L-20	- Label, For Clothing, Equipage, And Tentage, (General Use).

MILITARY

MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).
MIL-C-43479	- Cloth, Broadcloth, Polyester And Cotton.

STANDARDS

FEDERAL

FED-STD-751	- Stitch, Seam And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

*3.2 First article approval. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished shirts specified by the procuring activity (see 6.2), shall be submitted or made available to the contracting officer or his authorized representative for inspection. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier at the same facilities to be used for the manufacture of the production items.

3.3 Material.

*3.3.1 Basic material. The basic material shall be cloth, broadcloth, polyester and cotton, white 3024 (see 6.3), conforming to type I, class 1 of MIL-C-43479.

3.3.2 Interlining. The interlining for the collar and collar stand shall be cut from the cloth, broadcloth, polyester and cotton specified in 3.3.1.

3.3.3 Thread. The cotton thread shall conform to V-T-276, mercerized finish, type IC1, ticket No. 0/3-ply for sewing on buttons and ticket No. 00/3-ply for all seaming and stitching.

3.3.4 Buttons. The buttons shall be 20 or 21 line, pearlescent-polyester composition white conforming to the requirements for type II, class K, style 25 of V-B-871.

*3.3.5 Labels. Each shirt shall have a combination identification-size label and a size label. The shirt is intended to be laundered and the labels shall show fastness to laundering.

*3.3.5.1 Combination identification-size label. The combination identification-size label shall conform to type I, class 1 and class 2 of DDD-L-20 and bear the following inscription:

Nomenclature (item description)
Contract number
Size
Stock number
Contractor's name
Fur, Wool or Fiber Products Act information

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

*3.3.5.2 Size label. The size label shall conform to type I, class 2 of DDD-L-20 except the stock number may be omitted.

*3.3.6 Laundry instruction tag. Each shirt shall have an instruction hang tag with not finer than 5-ply cotton string doubled to not less than 4 inches long. The tag shall be made of cardboard approximately 3-1/2 by 3 inches in size with letters not less than 1/16 inch high, except the title and the words "DO NOT USE BLEACH" shall be in capital letters not less than 1/8 inch high. The color of the cardboard shall be white or light in intensity to permit easy reading of printed marking. The tag shall have an eyelet for attaching the tying cord and shall be legibly printed with water insoluble ink with the following information centered on the tag.

LAUNDERING INSTRUCTIONS

Launder in warm water using a mild soap or detergent. Scrub soiled areas.

DO NOT USE BLEACH

Rinse thoroughly in clear warm water. Do not squeeze or wring out. Place dripping shirt on hanger. Press when dry or nearly dry on wrong side with steam iron at low heat.

*3.4 Design. The shirt shall be the Marine Corps design shown on Figures 1 through 3, six button, semiformfitting, having bust darts, front and back pleats and waist tucks, shirt-type collar, and short sleeves with cuffs.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 1/2-inch allowance for the seam joining the yoke to the back and for the armhole, side and sleeve seams; 3/8-inch allowance for shoulder seams; and 3/16-inch allowance for seam at edges of collar and all other seams. These patterns show size, and are marked or notched for proper cutting, placement, and assembly of component parts.

*3.5.1 List of pattern parts. Shirts shall be cut from the materials specified herein according to the pattern parts indicated below.

Item	Pattern nomenclature Material: Cloth, broadcloth, polyester and cotton	No. of cut parts
1.	Back	1
2.	Front	2
3.	Sleeve	2
4.	Yoke	2
5.	Collar	2
6.	Collar stand	2
7.	Collar interlining	1
8.	Collar stand interlining	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Manufacturing requirements. The shirts shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the shirts.

*3.6.1.2 Stitches, seams, and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Thread breaks and ends of seams. Ends of all seams and stitchings (stitch type 301), except ends of a continuous line of stitching, when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks shall be secured back of the break not less than 1/2 inch.

3.6.1.3 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the shirt. Any method of shade marking may be used except:

(a) Metal fastening device.
(b) Sew-on shade tickets.
(c) Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut shirt in strict accordance with patterns furnished by the Government. Fronts shall be cut with the front edge on the selvage. b. Cut material in the direction of the warp as indicated by directional lines on pattern. c. Cut component parts of shirt from one piece of basic material, except under ply of collar leaf, interlining for collar and collar stand, outer ply for collar stand, and inside yoke, which may be cut from ends. Part cut from ends shall harmonize with shade of shirts.					
2.	Replacement of damaged parts. a. Replace at time of cutting any part of shirt containing holes, seriously weakening defects such as smashes, multiple floats, loose or weakening slubs, etc. expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc. affecting appearance. b. Replace any part damaged during manufacturing process by needle chews which may develop into holes, scissors or knife cuts, tears, holes, mends, burns in the material affecting appearance.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Shade marking. a. Mark or ticket all component parts (see 3.6.1.3) cut from one piece of basic material, except those parts cut from ends, to insure uniform shade and size throughout the shirt. Parts cut from ends that are graded for size shall be identified for size.					
4.	Make collar. Finished appearance. The collar shall finish smooth and flat without twists, puckers, pleats, or other distortion. The points shall be worked out completely and shall be uniform in length. a. The collar shall consist of three plies of basic material. b. Seam the three plies together 3/16 inch from top (outer) and side (end) edges, with top ply positioned between interlining and under ply and all edges even.	301	SSa-1	12-16	00	00
	or					
	c. The collar interlining may be stitched to the under ply of collar 1/8 inch from top and side edges before joining to the top ply.	301	SSa-1	12-16	00	00
	d. Trim points and turn collar on a heated collar point turning and pressing machine, working out completely the points and working the seam line to the edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
5.	Assemble collar and collar stand.					
	Finished appearance. The collar stand shall be joined to the collar without pleats, twists, puckers or other distortion.					
	a. The collar stand shall consist of three plies of basic material.					
	b. Position the raw edge of collar between the outer and inner ply of collar stand, with the interlining on top of the inner ply and each end of collar even with notches. Seam collar stand pieces to collar 3/16 inch from edge, closing the ends of the stand.	301	SSq-2 (a) and SSe-2 (a)	12-16	00	00
	or					
	c. The collar stand interlining may be stitched to the inner ply of collar stand 1/8 inch from raw edges before joining to collar.	301	SSa-1	12-16	00	00
	d. Turn down the collar stand pieces and raise stitch the collar stand 1/16 inch from the joining seam. The stitching shall extend the length of the collar.	301	SSq-2 (b)	12-16	00	00
6.	Make foreparts; sew on label.					
	a. The foreparts shall be one piece with cut-on facings.					
	b. Turn the facings to the inside of foreparts in accordance with notches on pattern, and stitch facing to front 1/8 inch from raw edge at the upper	301	SSa-1	12-16	00	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Make foreparts;sew on label. (cont'd)					
	and lower edge the width of facing. Press evenly the front edges of shirt smooth and flat with a heated pressing iron or pressing machine. On the finished shirt, the facings shall be 3 ±1/4 inches wide.					
	c. Fold and stitch the tuck on inside of foreparts in accordance with marks on pattern (see Figure 3). The stitching shall be across the width of the tuck at each end and 3/8 to 1/2 inch from the fold, and shall extend 2-3/4 ±1/4 inches in length. Tucks shall not be stitched to body of shirt.	301	OSf-1	12-16	00	00
	d. Press the tucks smooth and flat with a heated pressing iron or pressing machine from the stitched top end of the tuck to the bottom edge of the shirt, forming a pleat below the tuck and with the inside folded edge of the tuck and inside folded edge of pleat turned toward the front edge of the shirt.					
	e. Fold and stitch the bust darts in foreparts as indicated by marks on pattern. The darts shall be neatly formed and tapered to a flat point. The point shall be securely tacked or backstitched.	301	OSf-1	12-16	00	00
	f. Position the identification label on the left facing with the bottom edge even with the selvage and the lower end approximately 1-1/2 inches above the lower edge of the facing. Sew the label to facing 1/16 inch from each edge.	301	SSa-1 and LSbj-1	12-16	00	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make tucks and form pleats in backpart.					
	a. Fold, stitch and press tucks and form pleats in backpart in same manner as specified for foreparts, except when pressing the tucks and pleats, the folded edge shall be towards the center back.					
8.	Join yoke to backpart.					
	a. The yoke shall be two ply.					
	b. Position backpart between the two plies with lower edge of backpart and lower edge of yoke pieces even and notches matching Seam the three pieces together 1/2 inch from the edge.	301	LSbp-2 (a)	12-16	00	00
	c. Turn back the outside yoke and raise stitch the yoke 1/16 inch from joining seam. The raised stitching shall not be through the inside yoke.	301	LSbp-2 (b)	12-16	00	00
9.	Join yoke to foreparts.					
	a. Shirr the shoulder edge of foreparts between the notches as indicated by pattern.	301	OSa-1	12-16	00	00
	b. Join inside yoke to foreparts at shoulders with 3/8 inch seam, matching notches.	301	SSa-1	12-16	00	00
	c. Turn under the shoulder edge of the outside yoke 3/8 inch. Lap the folded edge to the front parts and stitch through all plies 1/16 inch from the folded edge. On the finished shirt, the yoke shall lap on the outside of the foreparts with the folded edge towards the front.	301	LSb-1	12-16	00	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
10.	Set collar with size label. Finished appearance. The collar shall be uniformly stitched to the shirt without pleats, puckers, twists, or raw edges. On the finished shirt, the collar stand shall be 1 to 1-1/8 inches wide, and the collar shall be 1-5/8 +1/8 inches wide at the center back. The ends of collar shall be 3-1/8 +1/8 inches, when measured from juncture point of collar and collar stand to finished edge of collar. a. Position collar-collar stand assembly on the outside of shirt, matching notches at center back and with ends of collar stand even with front edges of shirt.					
	b. Join collar stand from end to end to forepart, facing and yoke with a 3/16-inch seam.	301	LScf-2 (a)	12-16	00	00
	c. Turn under the lower edge of the inner ply of the collar stand; lap the folded edge on the inside of the shirt and top stitch the collar stand, starting at the top edge not less than 3/8 inch to the back of the lower corners of the collar and continuing around the ends and along the bottom edge 1/16 inch from the edges, catching the upper edge of size label in the seam at center back.	301	SSe-2 (b) and LScf-2 (b)			
11.	Set sleeves. Finished appearance. The sleeves shall be properly set and uniformly stitched without pleats, puckers, twists, or raw edges. The seams shall start and finish evenly.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
11.	Set sleeves. (cont'd)					
	a. Join sleeves to shirt around the entire armhole with a 1/2-inch seam, matching notches.	301	SSa-1	12-16	00	00
12.	Overedge stitch sleeve and armhole.					
	a. Overedge stitch the raw edges of the sleeve and armhole together.	504	SSa-1	10-14	00	00
13.	Close sides and sleeve.					
	Finished appearance. The sleeve and side seams shall be uniformly stitched without pleats, puckers, or twists. The seams shall start and finish evenly.					
	a. Join foreparts and backpart at the sides and close sleeve underarm with a 1/2-inch seam, turning the folded edge of the bust darts towards the bottom of the shirt, the armhole seam flat against the sleeve, and catching the back end of the darts and ends of the armhole seam allowance in the stitching.	301	SSa-1	12-16	00	00
14.	Overedge stitch seams and bottom edge.					
	a. Overedge stitch the raw edges of the side and sleeve seam allowances and bottom edge of the shirt with side seams turned toward the back and catching the back end of bust darts and ends of armhole seam in the stitching at the sides, and the bottom end of the facings and side seams in the stitching at the bottom edge.	504	EFd-1	10-14	00	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
15.	Hem sleeves and make cuffs.					
	a. Turn the bottom of the sleeve to the inside in accordance with the notches. Turn the bottom raw edge under 3/8 to 1/2 inch and stitch to the body of the sleeve 1/16 inch from the upper folded edge, catching the turned portion in the stitching. On the finished shirt, the hem shall be 1-3/4 ±1/8 inches wide.	301	EFd-1	12-16	00	00
	b. Turn lower end of sleeves to outside forming 1-1/8 to 1-1/4-inch-wide cuff. Tack cuffs to body of sleeves along sleeve seam for a distance of 1/2 inch. A straight line tack may be used.	301	SSa-1	12-16	00	00
16.	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The buttonholes shall be the straight purl type, barrel (tacked) at both ends, and shall be made to fit a 20 or 21 line sewing hole button. The purling shall be on the outside of shirt.					
	a. Mark the right forepart in accordance with the mark on the pattern for the location of five equally spaced buttonholes. On the finished shirt, the top buttonhole shall be 2-3/4 inches below buttonhole in the collar stand.					
	b. Mark the right end of the collar stand for the location of one buttonhole. On the finished shirt, the buttonhole					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
16.	Make buttonholes. (cont'd)					
	shall be midway between top and bottom edges of the collar stand with center of the buttonhole aligned with the center of the buttonholes on the right forepart.					
	c. Make a 5/8-inch-long vertical straight type buttonhole at each mark on the right forepart, securely tacking each end, and with the center of the buttonhole 5/8 ±1/8 inch from front edge.	Buttonhole		55 per buttonhole (including tack)	00	00
	d. Make a 5/8-inch-long horizontal straight type buttonhole at the mark on the right end of the collar stand, securely tacking ends of the buttonhole.	Buttonhole		55 per button hole (including tack)	00	00
17.	Mark for buttons.					
	a. Mark the left forepart for the location of five buttons to properly engage buttonholes in right forepart. On the finished shirt, the center of the buttons shall be 5/8 ±1/8 inch from front edge.					
	b. Mark left end of collar stand for the location of one button to properly engage buttonhole in right end of collar stand. On the finished shirt, the center of the button shall be aligned with the center of the buttons on the forepart.					
18.	Sew on buttons.					
	Finished appearance. The buttons shall be securely sewn and shall properly engage buttonholes.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
18.	Sew on buttons. (cont'd)					
	a. Sew one button at each of the marks on the left forepart through all plies.	101		22 per button	0	0
	b. Sew on button at the mark on left end of the collar stand.	101		22 per button	0	0
19.	Cleaning.					
	a. All ends of stitching shall be trimmed, and the loose threads removed from the shirt.					
	b. All spots, stains and shade tickets or markings shall be removed without injury to the material.					
20.	Pressing.					
	a. The entire shirt shall be well pressed smooth and flat with a heated pressing iron or pressing machine.					
	b. The sleeve cuffs shall be creased.					
	c. The collar shall be pressed smooth and flat.					
	d. Attach laundry instruction tag to top collar button prior to buttoning the shirt.					
	e. The shirt shall be buttoned and finish pressed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished shirt shall conform to the measurements shown in Table II. The shirt shall be measured buttoned and lying smooth and flat.

Table II - Finished measurements

Size	Back length 1/ inches	Bust 2/ inches	Waist 3/ inches	Sleeve length 4/ inches	Collar length 5/ inches
28	22-3/4	37-1/4	29-3/4	8-1/8	13
30	23	38-1/2	31	8-1/4	13-1/4
32	23-1/4	39-3/4	32-1/4	8-3/8	13-1/4
34	23-1/2	41	33-1/2	8-1/2	13-1/2
36	23-3/4	42-1/4	34-3/4	8-5/8	14
38	24	43-1/2	36	8-3/4	14-1/2
40	24-1/4	44-3/4	37-1/4	8-7/8	14-3/4
42	24-1/2	46	38-1/2	9	15-1/4
Tolerance	+1/2	±3/4	±3/4	±3/8	+1/4 -1/8

1/ Back length measurement taken from lower edge of collar stand to bottom edge of shirt.

2/ Bust measurement taken across front of shirt from folded edge to folded edge at pit of armhole. Multiply measurement by two.

3/ Waist measurement taken across front of shirt at stitched top end of tucks. Multiply measurement by two.

4/ Sleeve length measurement taken from armhole seam at top of shoulder down center of sleeve to bottom edge of finished cuff.

5/ Collar length measurement taken along outside center of collar stand from center of buttonhole to center of button.

3.8 Workmanship. The finished shirt shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be performed on a completely fabricated shirt for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

*4.2.2.1 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.1, 4.2.3.2 and 4.2.3.3. The sample unit shall be one shirt.

*4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Buttons	a. One or more missing, loose, insecurely sewn, broken or otherwise defective.		X	
	b. Not specified size, type or color.		X	
Buttonholes (construction)	a. Stitches not securely caught in fabric, causing stitches to pull away from fabric.	X		
	b. More than 2 skipped stitches in one or more buttonholes.		X	
	c. One or more broken stitches in: -one buttonhole.		X	
	-two or more buttonholes.	X		
	d. Tack (bar) on one or both ends omitted or insecure on: -one buttonhole.			X
	-two or more buttonholes.		X	
	e. Very ragged edge on buttonhole(s), incomplete stitching or uncut.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	f. Not specified type buttonhole or purling not on outside.		X	
	g. Poorly constructed unless otherwise classified herein.		X	
	h. Buttonhole(s) not corresponding to size of button(s) so they do not button properly.		X	
Cleanness	a. Removable spot or stain, clearly noticeable.			X
	b. Spot or stain of an obvious permanent nature.	X		
	c. Thread ends not trimmed, loose thread ends, or one or more shade tickets (if used) not removed throughout shirt.			X
Components and assembly	Any omitted or defective component or any omitted operation or defect of assembly (unless otherwise classified herein).	X		
Cutting	Any part not cut with directional line on pattern in the warp direction of the cloth or in accordance with specification requirements.	X		
Laundry instruction tag	Missing, incorrect or not attached to top button prior to buttoning.		X	
Material defects and workmanship damages	a. Hole (except drill hole), cut, tear, or needle chew.	X		
	b. Drill hole exposed on outside of shirt.		X	
	c. Any mend or darn on outside.	X		
	d. Mend or darn 1/8 to 1/4 inch in diameter or length on inside (except on seam allowance).			X
	e. Mend or darn more than 1/4 inch in diameter or length on inside (except on seam allowance).		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	f. Friction burn when fibers are broken (shall be classified as a hole, cut, tear or needle chew).	X		
	g. Friction burn more than 1/4 inch in length but fibers not broken.			X
	h. Weakening defects such as smash.	X		
	i. Weakening defects such as multiple float, loose slub, unsightly slub, or shade bar on outside above waist (1 inch or more above bottom button).		X	
	j. Weakening defects such as multiple float, loose slub, unsightly slub, or shade bar on inside or below waist (1 inch or more below bottom button).			X
Shaded parts	a. Any outside part, except under ply or collar leaf, interlining for collar and collar stand and inside yoke, shaded.	X		
	b. Any part cut from ends badly shaded.			X
Seams and stitching	a. Accuracy of seaming:			
	1. Any part of shirt caught in an unrelated operation or stitching.	X		
	2. Seam twisted, puckered or pleated (unless otherwise classified herein).		X	
	3. End(s) of all stitchings not backtacked when not caught in other seams or stitching, or ends of a continuous line of stitching not overlapped, or thread breaks not stitched back of ends of break.		X	
	4. Shade(s) of thread used on outside not satisfactorily matching shade of shirt.		X	
	b. Gage of stitching:			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	2. Not within the range of gage specified, or varying more than 1/16 inch when no range is specified.			X
	3. Edge, raise, or top stitching too close to edge, resulting in damage to fabric.	X		
	c. Open Seams:			
	1. On joining seam:			
	-over 1/8 inch, to and including 1/4 inch.			X
	-over 1/4 inch to and including 1 inch.		X	
	-over 1 inch	X		

NOTE: A break in a line of stitching or continuous skipped or run-off stitches constitute an open seam.

	d. Raw edges (applicable to edges required to be turned under or overedge stitched).			
	1. On outside (except overedge stitched edge):			
	-over 1/8 inch, to and including 1/4 inch.			X
	-over 1/4 inch, to and including 3/4 inch.		X	
	-over 3/4 inch.	X		
	2. On inside (except overedge stitched edge):			
	-over 1/2 inch, to and including 2 inches.			X
	-over 2 inches.		X	
	3. On overedge stitched edge:			
	-over 1 inch, to and including 3 inches.			X
	-over 3 inches.		X	

NOTE: A raw edge along an edge required to be turned under is classified as such when edge is securely caught in the stitching. If the edge is not securely caught in the stitching, score the condition as an open seam.

	e. Run-offs:			
	1. On joining seams, when resulting in an open seam, score as "open seam".			
	2. On edge, top or raise stitching when not resulting in an open seam (outside only):			
	-over 1/2 inch, to and including 1 inch.			X
	-over 1 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	f. Not specified seam or stitch type.		X	
	g. Stitch tension:			
	1. Loose tension resulting in a loose seam.	X		
	2. Loose tension on raise or edge stitching, i.e., loosely exposed loops on lower or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
	NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.			
	h. Stitches per inch (to be scored only when the condition exists on major portion of seam).			
	1. Less than minimum number specified for:			
	(a) All seams except stitching of labels, seams that are later raise, edge or top stitched and overedge stitched:			
	-1 stitch.			X
	-2 stitches.		X	
	-3 stitches.	X		
	(b) All other excepted seams, except overedge stitching, two or more stitches.			X
	(c) Overedge stitching, three or more stitches.			X
	2. Any number of stitches in excess of maximum specified.			X
	i. Stitches skipped or broken on top, raise or edge stitching (when seam is seamed, turned and stitched):			
	1. 1/4 inch or more but not more than 1/2 inch.			X
	2. Over 1/2 inch.		X	
Pressing	a. Burned or scorched.	X		
	b. Omitted.		X	
	c. Shirt poorly pressed or partly pressed.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

*4.2.3.2 Detailed defects (outside of shirt). Detailed defects applicable to outside of shirt shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Collar and collar stand	a. Top collar twisted or tight, causing edges to curl.		X	
	b. Collar edges crooked, affecting appearance.	X		
	c. Collar edges not forced out so that seamline is at edge, i.e., having folds 1/16 inch or more deep, or undercollar exposed along edge for a distance of more than 1 inch.			X
	d. Collar ends poorly shaped, or not uniform in width, length or shape.		X	
	e. Width of collar at center back less than 1-1/2 inches or over 1-3/4 inches.			X
	f. Ends of collar less than 3 inches or over 3-1/4 inches in length.			X
	g. Width of collar stand at center back less than 1 inch or over 1-1/8 inches.			X
	h. Collar stand or body of shirt puckered or pleated in collar stand joining seams to collar or body of shirt.			X
	i. Collar puckered or pleated in collar stand joining seam.			X
	j. Stitching of inner collar stand and interlining joining seam exposed below bottom edge of outer collar stand.			X
	k. Collar or collar stand not centered by more than 3/8 inch with shoulder seam aligned, or collar ends unevenly positioned from ends of collar stand by more than 1/4 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	1. End(s) of collar stand protruding beyond front edge(s) of shirt more than 1/8 inch or ends of collar stand poorly or not uniformly shaped.			X
	m. Ends of collar or shirt front corners not securely caught in joining seam(s) to collar stand.	X		
Collar stand button and buttonhole	a. Buttonhole on right front end over 1/8 inch off center of collar stand.			X
	b. Center of buttonhole out of alignment with shirt front buttonholes by over 1/4 inch.		X	
	c. Button and buttonhole out of alignment when buttoned, causing fronts to be uneven at bottom of collar stand by over 1/4 inch.		X	
	d. Center of button not aligned with center of buttons on shirt front by over 1/4 inch.			X
Front closure	a. Buttons and buttonholes out of alignment, causing a noticeable bulge on fronts when buttoned, affecting appearance.	X		
	b. Length of fronts, when buttoned, uneven at bottom by 1/2 inch or more.		X	
	c. Buttonholes in right forepart:			
	1. Top buttonhole under 2-1/2 inches or over 3 inches below center of collar stand buttonhole.		X	
	2. Unequally spaced or out of vertical alignment by over 1/4 inch.		X	
	3. Constructed horizontally.	X		
	4. Center of buttonhole(s) under 1/2 inch or over 3/4 inch from front edge.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	d. Center of button(s) in left forepart under 1/2 inch or over 3/4 inch from edge, or out of vertical alignment by over 1/4 inch.			X
	e. Length of unbuttoned fronts uneven by more than 1/2 inch.			X
Yoke joining seam to foreparts	a. Large pleat in shirred portion or fullness in the shirring not distributed uniformly on both fronts, or ends uneven distance from neck or armhole seam lines, affecting appearance.	X		
	b. Stitching of inside yoke joining seam exposed beyond edge of outside yoke.			X
Underarm darts	a. Not turned toward bottom of shirt.			X
	b. Uneven in length by more than 1/2 inch.			X
	c. Not uniformly positioned, affecting appearance.		X	
	d. End(s) not tapered, resulting in unsightly bulge(s).		X	
Front and back tucks and pleats	a. Tucks not uniformly positioned from side seams, affecting appearance.		X	
	b. Top of tucks uneven distance from bottom of shirt by more than 1/2 inch.			X
	c. Inside fold of tucks not turned away from side seams.			X
	d. Pleat(s) below bottom of tuck not pressed in, not extending to bottom of shirt or outside fold of pleat not facing side seam.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Armhole and sleeve	a. Excessive fullness or fullness misplaced, resulting in puckers or pleats in sleeve head.	X		
	b. Sleeve tight, causing fullness or pleats on fronts, back or yoke.	X		
	c. Armhole seam line irregular, i.e., crooked, affecting appearance.	X		
	d. Ends of armhole seam line staggered more than 1/4 inch at side seam line.			X
	e. Sleeve puckered or pleated in stitching of hem or hem twisted, puckered or pleated, affecting outside appearance.	X		
	f. Stitching on hem exposed above top of cuff.			X
	g. Cuff less than 1-1/8 inches or more than 1-1/4 inches in width.			X
	h. Tacking of cuff along sleeve seam line through cuff:			
	-omitted or insecure.			X
	-less than 3/8 inch or over 5/8 inch in length.			X
	i. Cuff irregular in width by 3/16 inch or more.			X
	j. Left and right cuffs not uniform in width by more than 1/4 inch.			X
Yoke joining seam to back	a. Yoke or shirt back puckered or pleated at joining seam.			X
	b. Raise stitching not on yoke.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

*4.2.3.3 Detailed defects (inside of shirt). Detailed defects applicable to inside of shirt shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Front facings	a. Less than 2-3/4 inches or more than 3-1/4 inches wide.			X
	b. Uneven in width by more than 1/2 inch.			X
	c. Back edge(s) not cut on selvage.		X	
	d. Identification label: -omitted, incorrect or illegible.			X
	-misplaced, i.e, bottom edge of label not toward back edge of facing, or bottom end less than 1 inch or more than 2 inches from bottom of shirt.			X
	-one or more sides not stitched to facing or stitched through outside of shirt.			X
Size label	a. Omitted, incorrect or illegible.		X	
	b. Insecurely caught in inner collar stand joining seam to shirt.		X	
	c. Over 1 inch off center of collar stand.			X
Yoke joining seam to back	Raise stitching at bottom exposed through inside yoke.			X
Armhole seam	Not turned into sleeve, including end(s) at side seam(s).			X
Side seams	Not turned against back, including seam ends at cuff and bottom of shirt.			X
Front and back tucks	a. Not stitched across top or bottom end.			X
	b. Less than 2-1/2 inches or more than 3 inches in length.			X
	c. Less than 3/8 inch or more than 1/2 inch in width.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

*4.2.3.4 Size measurements. Any measurement deviating from nominal dimension and tolerance specified in Table II shall be scored as a size measurement defect. Sleeve lengths uneven by more than 3/8 inch shall be scored as a size measurement defect.

*4.2.3.5 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

	AQL	Inspection Level of MIL-STD-105
For 4.2.3.1 through 4.2.3.3		
Major	1.5 DHU	III
Major and Minor A (combined)	6.5 DHU	
Totals (Major, Minor A and Minor B combined)	15.0 DHU	
For 4.3.3.4		
One class	4.0 DHU	S-3

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any compoment missing or not as specified. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulged or distorted container. Open and non-continuous heat sealed seams and closure of polyethylene bag.
Content	Number of packages per container is more or less than required. 1/ Size shown on one or more shirts not as specified on container. 2/

1/ For this defect, one container in the sample shall be examined.

2/ For this defect, one shirt from each container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each fully-buttoned shirt shall be folded in accordance with standard practice to approximate dimensions of 12 by 10 inches. The folded shirt shall be placed in a polyethylene bag approximately 15 inches long and 12 inches wide, with a 1-inch lip along the 12-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. All seams and closures shall be effected by heat sealing. Prior to or during the final heat sealing operation, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

*5.1.2 Level C. Shirts shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Fifteen (15) shirts of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to requirements for class weather resistant, size No. 1A of MIL-B-17757 and assembled, closed, and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

*5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers (180 shirts of one size only) shall be packed in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757, and assembled, closed and reinforced as specified in the appendix thereto. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.2 Level B. Fifteen (15) shirts of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to class domestic, size No. 1A of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.3 Level C. Shirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification.

Nomenclature
Size _____ Stock number _____
Contract number
Name of contractor

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The shirts are intended for wear by women of the U. S. Marine Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.

(b) Size required (see 1.2).

(c) Whether first article is required (see 3.2).

(d) Number of shirts in first article (see 3.2).

(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(f) When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

*6.3 Samples and shade samples. For information regarding the availability of sample shirt, and of standard shade specified, address inquiry to the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8410-N221

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

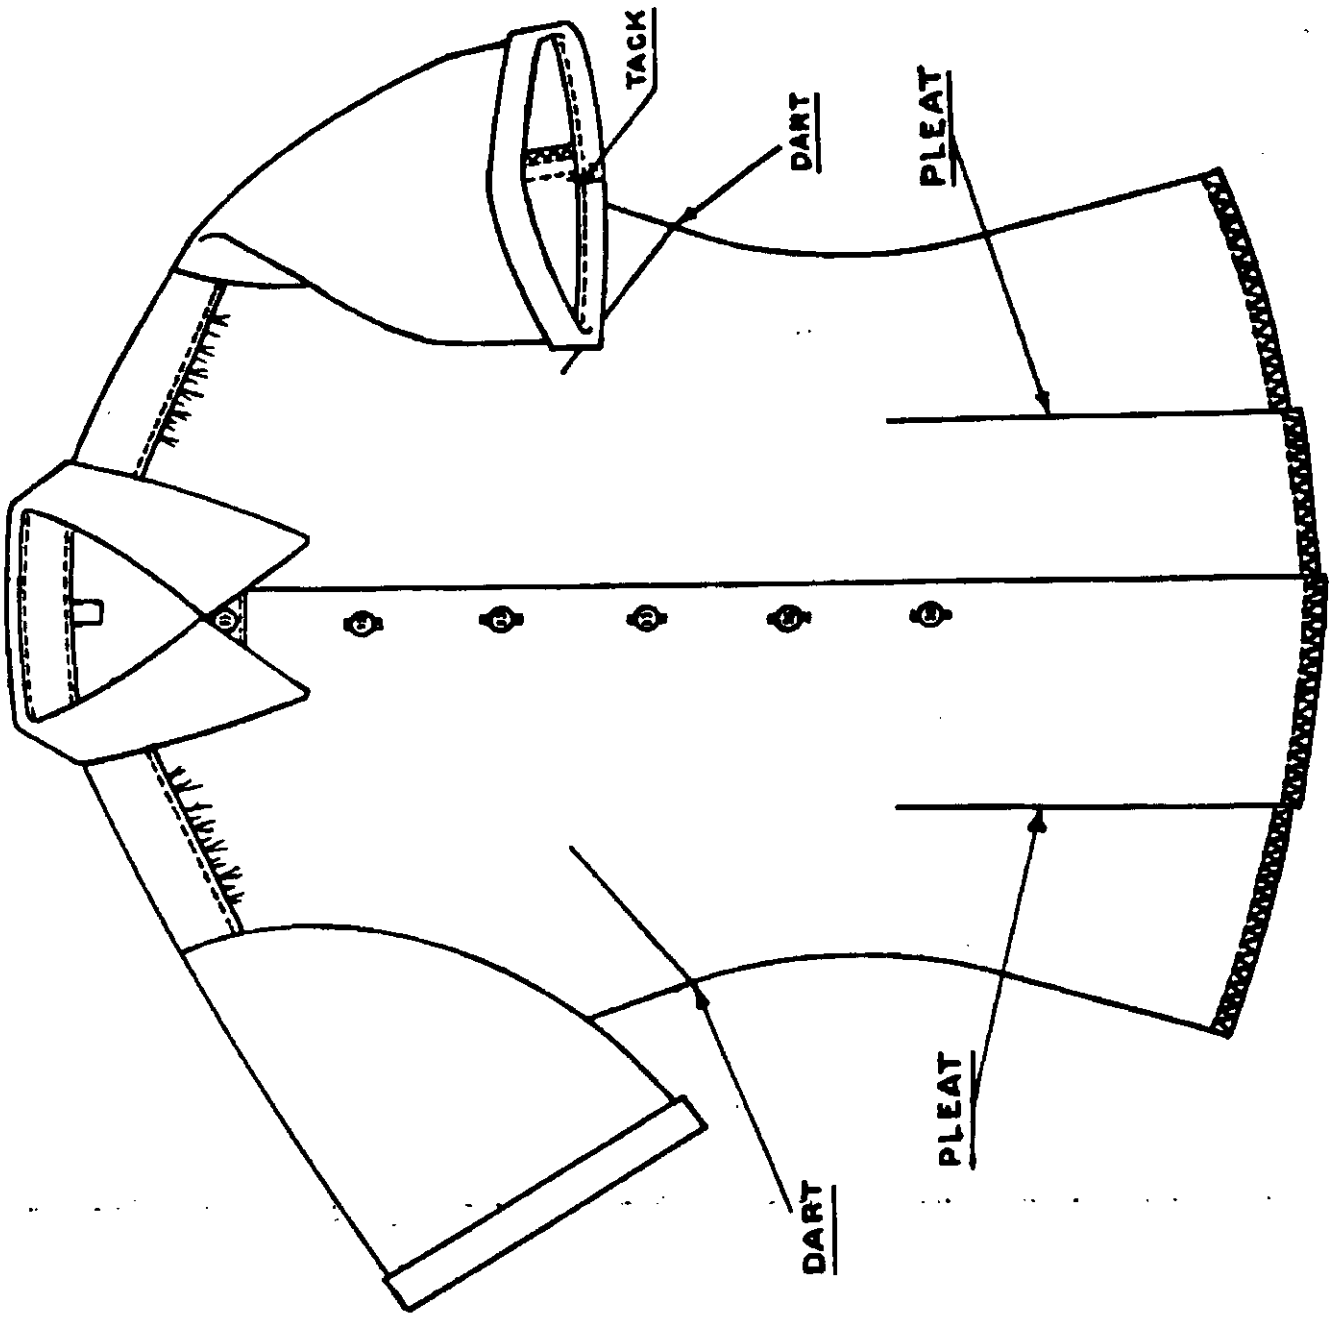


FIGURE 1. SHIRT, WOMAN'S: BROADCLOTH, POLYESTER-COTTON; WHITE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.


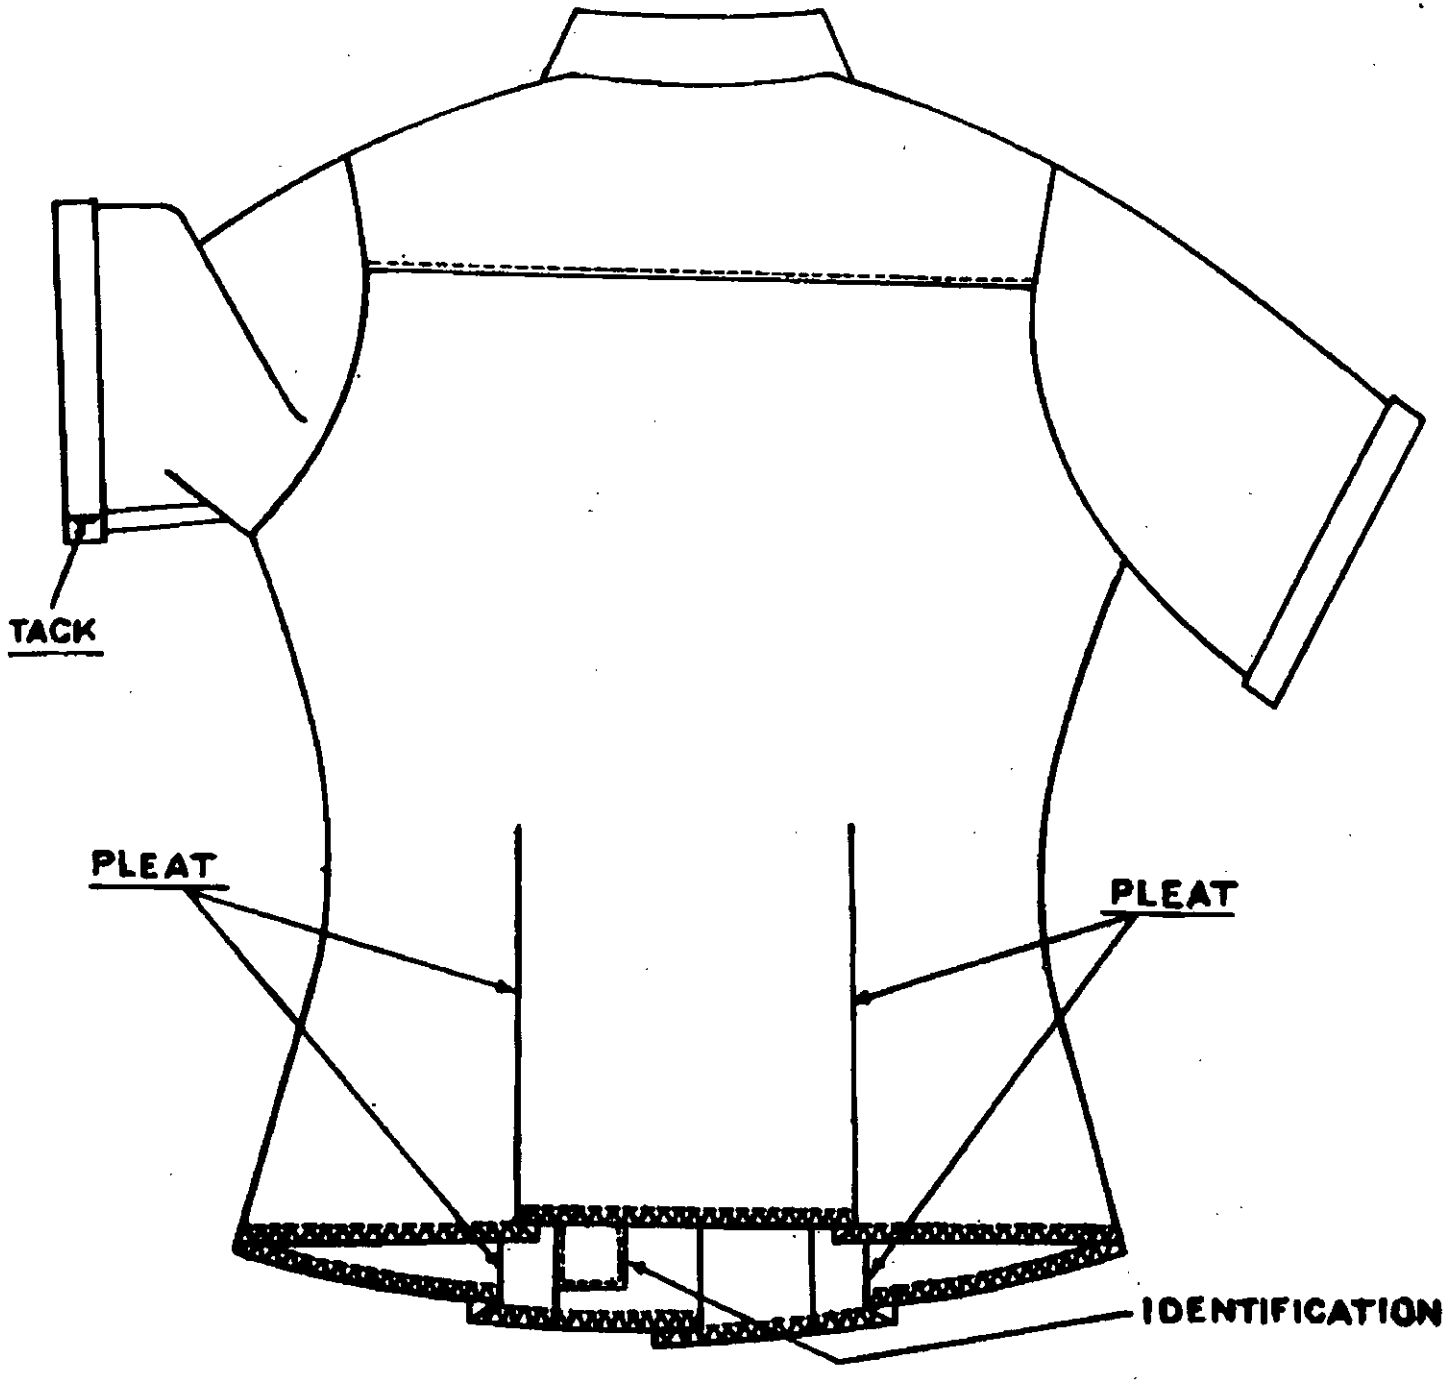


FIGURE 2. SHIRT, WOMAN'S: BROADCLOTH, POLYESTER-COTTON; WHITE

M.C.S.A. 826: R.S.P. 4 Aug '78

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

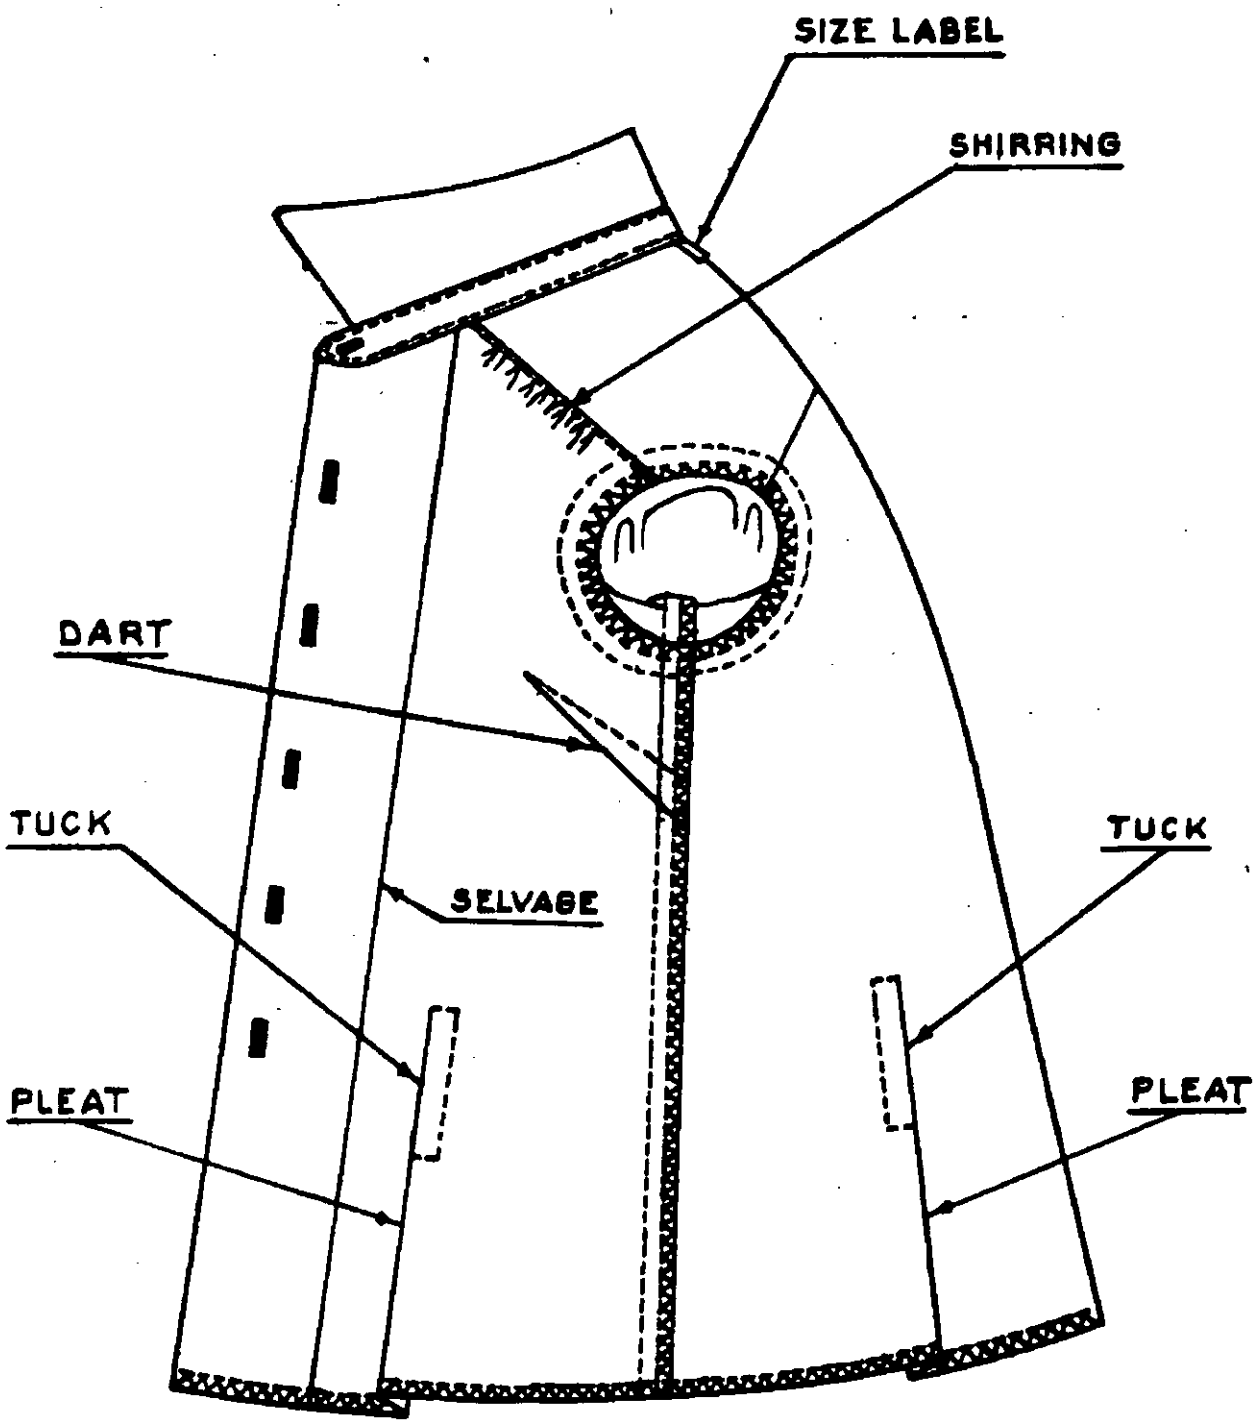

DETAIL: INSIDE, RIGHT

FIGURE 3. SHIRT, WOMAN'S: BROADCLOTH, POLYESTER-COTTON; WHITE.

M.C.S.A. 826: R.G.P. 4 Aug '72

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
MIL-S-19542 C(MC)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 65 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:09Z
Check the source to verify that this is the current version before use.