NOT MEASUREMENT SENSITIVE

MIL-L-11484/105B
9 June 1992
SUPERSEDING
MIL-L-11484/105A
27 June 1988

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, AIR RESERVE FORCES MERITORIOUS SERVICE MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

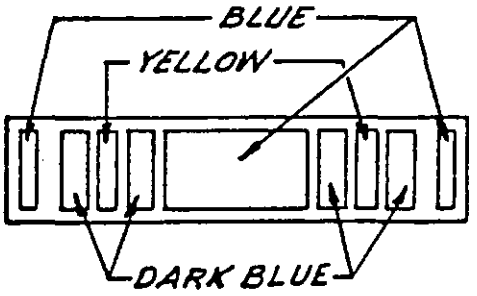

MATERIAL: Gilding Metal

DIMENSIONS:
HEIGHT (Overall): 9/64 inch (0.36 cm) (REF)
WIDTH (Overall): 21/32 inch (1.67 cm) (REF)
THICKNESS (At edge): 0.065 inch ± .010 inch (0.165 cm ± 0.025 cm)

FINISH: Hard Enameled, Nickel Plated, Mirror-like Polished

NOTES:
1. Attaching devise shall be prong with pick and wing type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:43Z
Check the source to verify that this is the current version before use.

2. Enameled colors shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Yellow	8
Dark Blue	18
Blue	30

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

4. The term (REF) refers to measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Air Force -11

Review activities:
Air Force - 82, 99
DLA - CT

User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0671)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:43Z
Check the source to verify that this is the current version before use.