NOT MEASUREMENT SENSITIVE

MIL-L-11484/97C
9 November 1992
SUPERSEDING
MIL-L-11484/97B
9 August 1991

MILITARY SPECIFICATION SHEET

# LAPEL BUTTON, NAVY UNIT COMMENDATION, CIVILIAN

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

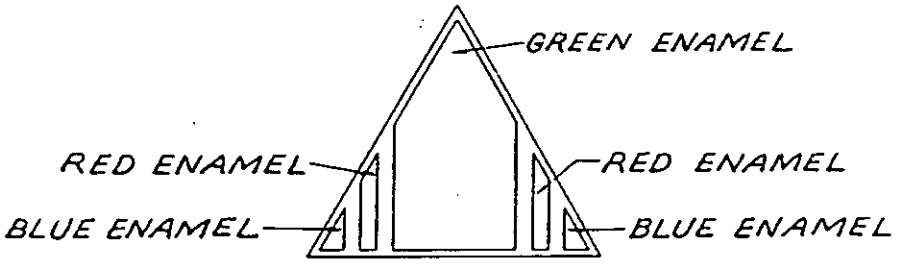


MATERIAL: Gilding Medal

DIMENSIONS:
HEIGHT (Overall): 9/16 inch (1.43 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS (Edge): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished

NOTES:
1. The attaching device shall be prong with pick and clutch type. The prong shall be centered on the reverse side and fused or soldered to the label button.

2 The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:39Z
Check the source to verify that this is the current version before use.

3. Enameled colors shall be as indicated. The enamel colors shall conform to the TIOH chip numbers listed below or the standard sample.

| COLOR | CHIP NO. |
|---|---|
| Red | 1 |
| Green | 12 |
| Blue | 18 |

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 or the standard sample.

5. The use of any type of plastic packaging material is prohibited.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0692)



Source: https://assist.dla.mil -- Downloaded: 202610-17T16:39Z
Check the source to verify that this is the current version before use.