NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/98E
27 September 1996
SUPERSEDING
MIL-L-11484/98D
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, MERITORIOUS UNIT COMMENDATION, NAVY CIVILIAN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

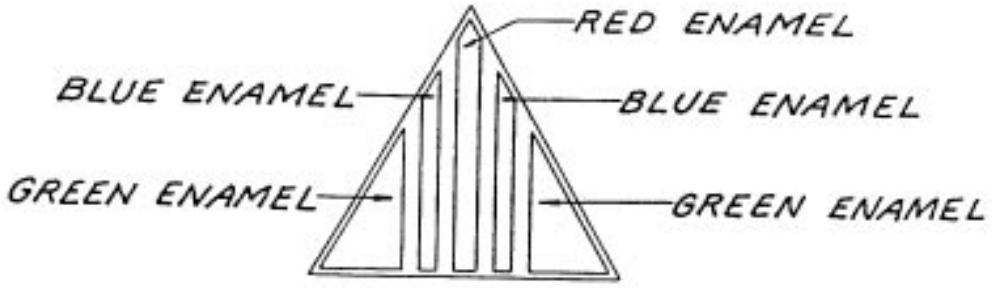

MATERIAL: Gilding Medal

DIMENSIONS:
HEIGHT (Overall): 9/16 inch (1.43 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS (At Edge): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:40Z
Check the source to verify that this is the current version before use.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Red	1
Green	12
Blue	18

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

5. The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:40Z
Check the source to verify that this is the current version before use.