NOT MEASUREMENT SENSITIVE


MIL-L-11484/170A
9 March 1990
SUPERSEDING
MIL-L-11484/170
28 February 1990

MILITARY SPECIFICATION SHEET

Lapel Button, General Defense Intelligence Program, DOD

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

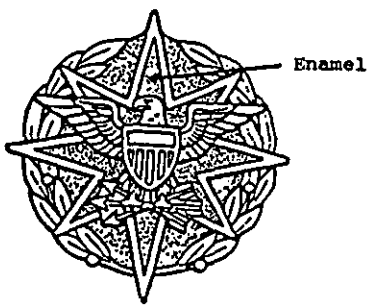

DASH NO. -1



DASH NO. -2, -3

-1: Certificate of Distinction
-2: Certificate of Merit
-3: Certificate of Achievement

MATERIAL:
BASE:
-1: Gilding metal

-2, -3: Red brass

DEVICE: Red brass

DIMENSIONS:
HEIGHT (Overall): 5/8 inch (1.59 cm)
WIDTH (Overall): 5/8 inch (1.59 cm)
ASSEMBLED THICKNESS (At thickest point): .125 inch ± .005 inch (0.31 cm) ± (0.012 cm)

FINISH:
-1: BASE: Hard enameled, nickel plated, silver plated, oxidized, relieved, matte finish, highlights lightly polished.

DEVICE: Gold plated, light rose gold plated, matte finish, highlights lightly polished.

-2: Base and device gold plated, light rose gold plated, matte finish, highlights lightly polished.

-3: Base and device nickel plated, silver plated, oxidized, lightly relieved, matte finish, highlights lightly polished.

NOTES:

1. Attaching device shall be prong and pick with ball type clutch. The prong shall be centered on the reverse side of the lapel button.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:09Z
Check the source to verify that this is the current version before use.

2. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The rivets may be an integral part of the device. The device shall be located as shown.

3. Enameled areas shall be as indicated. The blue enamel color shall match TIOH color chip number 33 or the standard sample.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy and have a minimum shore D hardness of 85 and incorporate a ultraviolet inhibitor. When epoxy resin is used, rivets or an cyanoacrylate adhesive shall be used to attached the device to the lapel button.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

Project no. 8455-0463

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:09Z
Check the source to verify that this is the current version before use.